

6 INCH UNDERDRAIN PIPE
 STA. 78+25 - STA. 81+50 LT
 STA. 78+25 - STA. 82+00 RT
 STA. 82+00 - STA. 83+50 LT

STONE FILL, TYPE I
 STA. 82+90 - STA. 83+50 RT

DURABLE 4 INCH WHITE LINE (SEE OPTION ITEMS)
 STA. 78+25 - STA. 83+50 (SOLID LT & RT)



DURABLE 4 INCH YELLOW LINE (SEE OPTION ITEMS)
 STA. 78+25 - STA. 83+50 (SOLID LT & RT)

TEMPORARY 4 INCH WHITE LINE, PAINT
 STA. 78+25 - STA. 83+50 (SOLID LT & RT)

TEMPORARY 4 INCH YELLOW LINE, PAINT
 STA. 78+25 - STA. 83+50 (SOLID LT & RT)

GEOTEXTILE FOR SILT FENCE
 STA. 82+90 - STA. 83+50 RT

GRUBBING MATERIAL (6")
 STA. 82+90 - STA. 83+50 RT

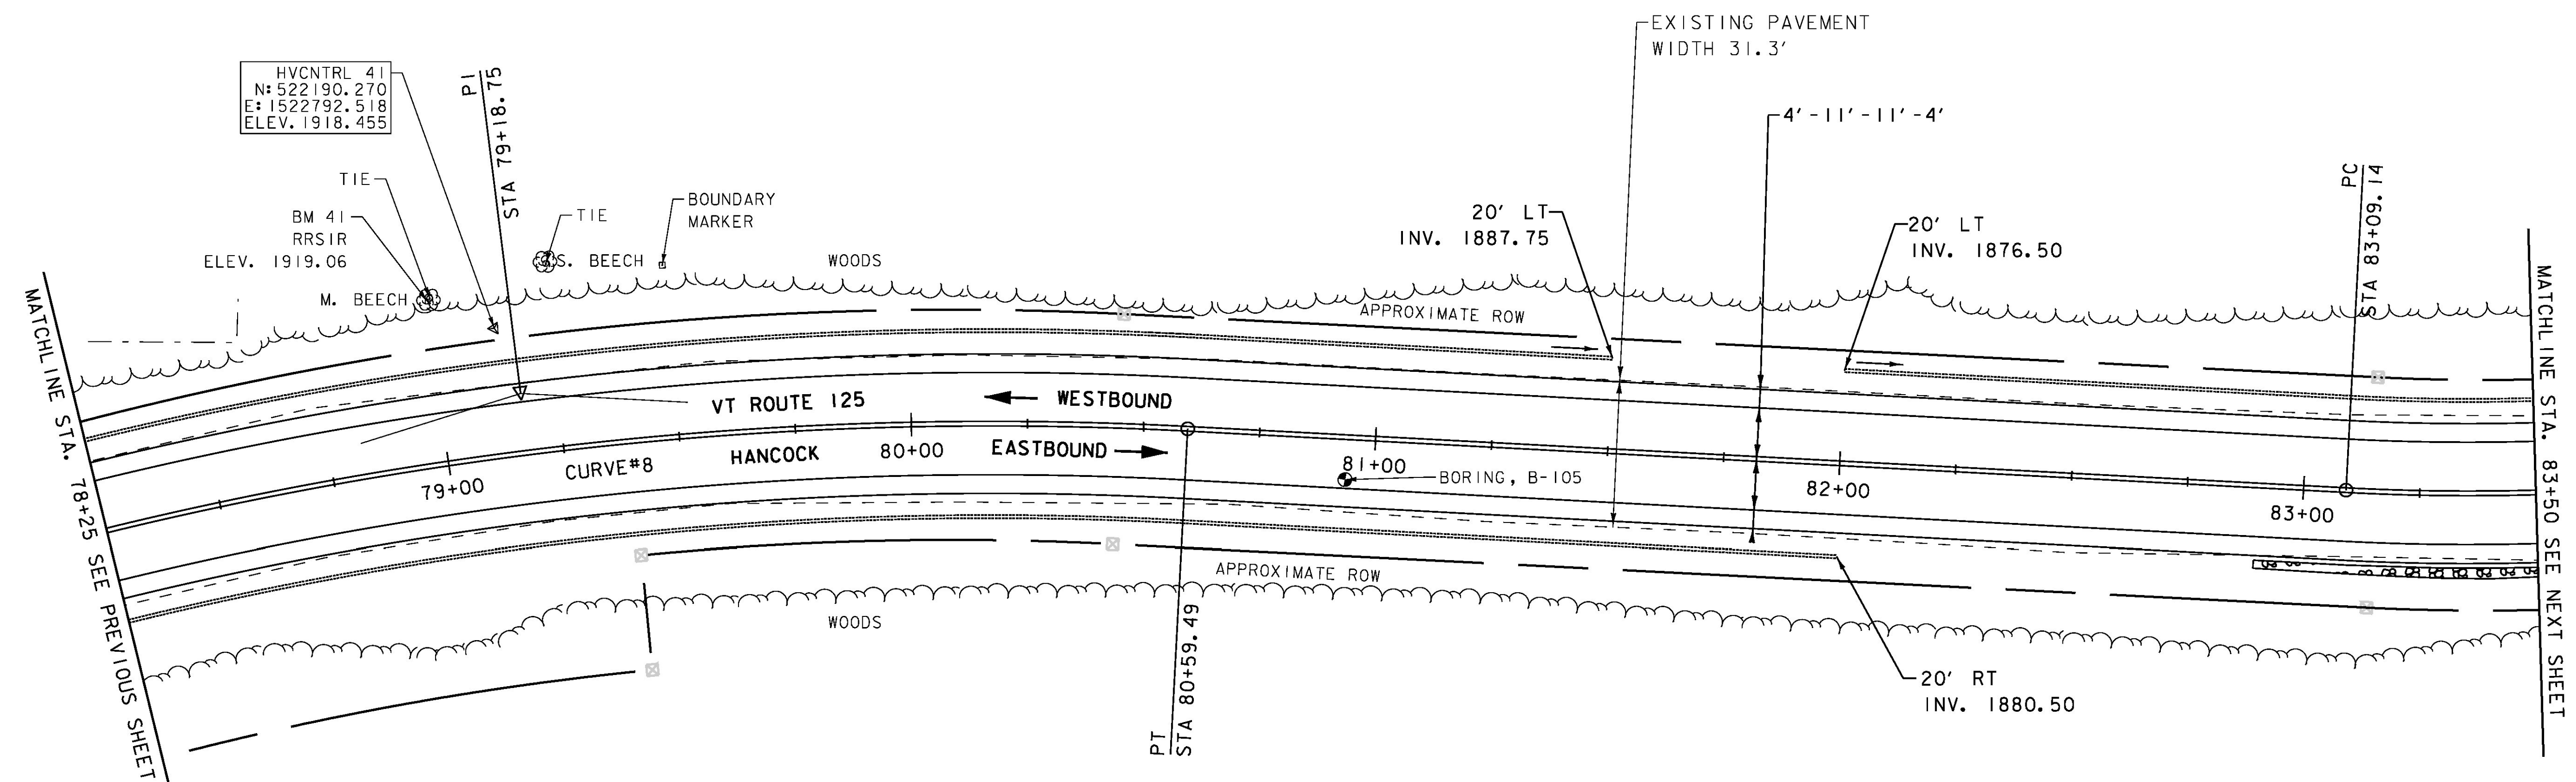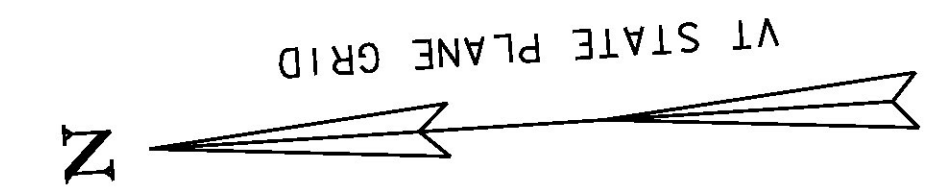

SIGN LEGEND

- R = REMOVE
- R&S = REMOVE AND SALVAGE
- RET = RETAIN
- S = SALVAGED
- N = NEW
- B-B = BACK TO BACK
- - = EXISTING
- = NEW

CURVE #8
 DELTA = 20°22'39"
 D = 7°09'43"
 R = 800.00'
 T = 143.78'
 L = 284.52'
 E = 12.82'
 BANKING 0.079 FT/FT
 DESIGN SPEED 50 MPH
 SEE BANKING DIAGRAMS
 FOR MORE INFORMATION



PROJECT NAME: HANCOCK	
PROJECT NUMBER: STP 2923 (1)	
FILE NAME: z10c252bdr.dgn	PLOT DATE: 3/18/2015
PROJECT LEADER: C. LATHROP	DRAWN BY: J. GOODALL
DESIGNED BY: B. MARTIN	CHECKED BY: C. LATHROP
PROJECT LAYOUT SHEET 8	SHEET 40 OF 207