

6 INCH UNDERDRAIN PIPE  
 STA. 102+00 - STA. 104+25 LT

STONE FILL, TYPE I  
 STA. 99+25 - STA. 101+62 LT  
 STA. 99+60 - STA. 100+30 RT  
 STA. 103+90 - STA. 104+25 RT

REMOVAL AND DISPOSAL OF GUARDRAIL  
 STA. 99+25 - STA. 101+62.5 LT  
 STA. 99+25 - STA. 101+15 RT  
 STA. 102+93 - STA. 104+25 RT

DURABLE 4 INCH WHITE LINE (SEE OPTION ITEMS)  
 STA. 99+25 - STA. 104+25 (SOLID LT & RT)

DURABLE 4 INCH YELLOW LINE (SEE OPTION ITEMS)  
 STA. 99+25 - STA. 104+25 (SOLID LT & RT)


TEMPORARY 4 INCH WHITE LINE, PAINT  
 STA. 99+25 - STA. 104+25 (SOLID LT & RT)

TEMPORARY 4 INCH YELLOW LINE, PAINT  
 STA. 99+25 - STA. 104+25 (SOLID LT & RT)


GEOTEXTILE FOR SILT FENCE  
 STA. 99+25 - STA. 101+62 LT  
 STA. 99+60 - STA. 100+30 RT  
 STA. 103+90 - STA. 104+25 RT

GRUBBING MATERIAL (6")  
 STA. 99+60 - STA. 100+30 RT  
 STA. 103+90 - STA. 104+25 RT

SPECIAL PROVISION (BOX BEAM GUARDRAIL W/7 FEET POSTS)  
 STA. 99+25 - STA. 101+03.5 RT  
 STA. 99+25 - STA. 101+64 LT  
 STA. 102+89.5 - STA. 104+25 RT

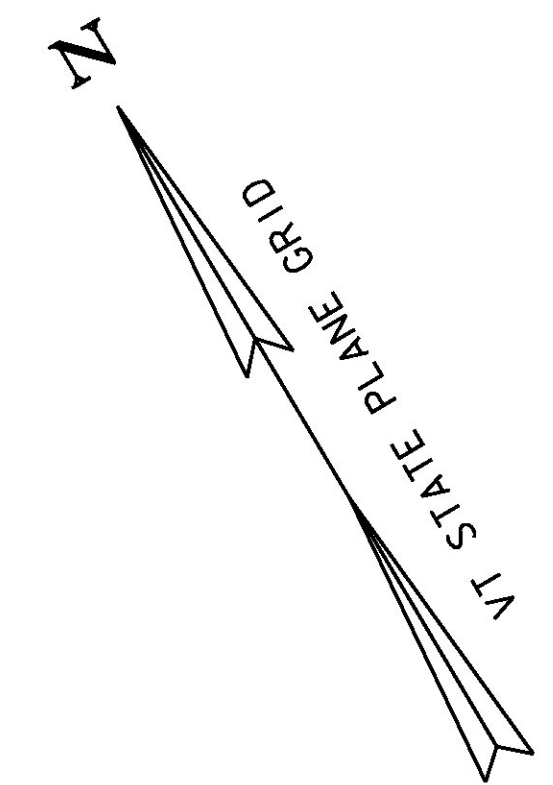

CURVE #10  
 DELTA = 41°50'49"  
 D = 5°08'19"  
 R = 1115.00'  
 T = 426.30'  
 L = 814.36'  
 E = 78.72'  
 BANKING 0.072 FT/FT  
 DESIGN SPEED 50 MPH  
 SEE BANKING DIAGRAMS  
 FOR MORE INFORMATION

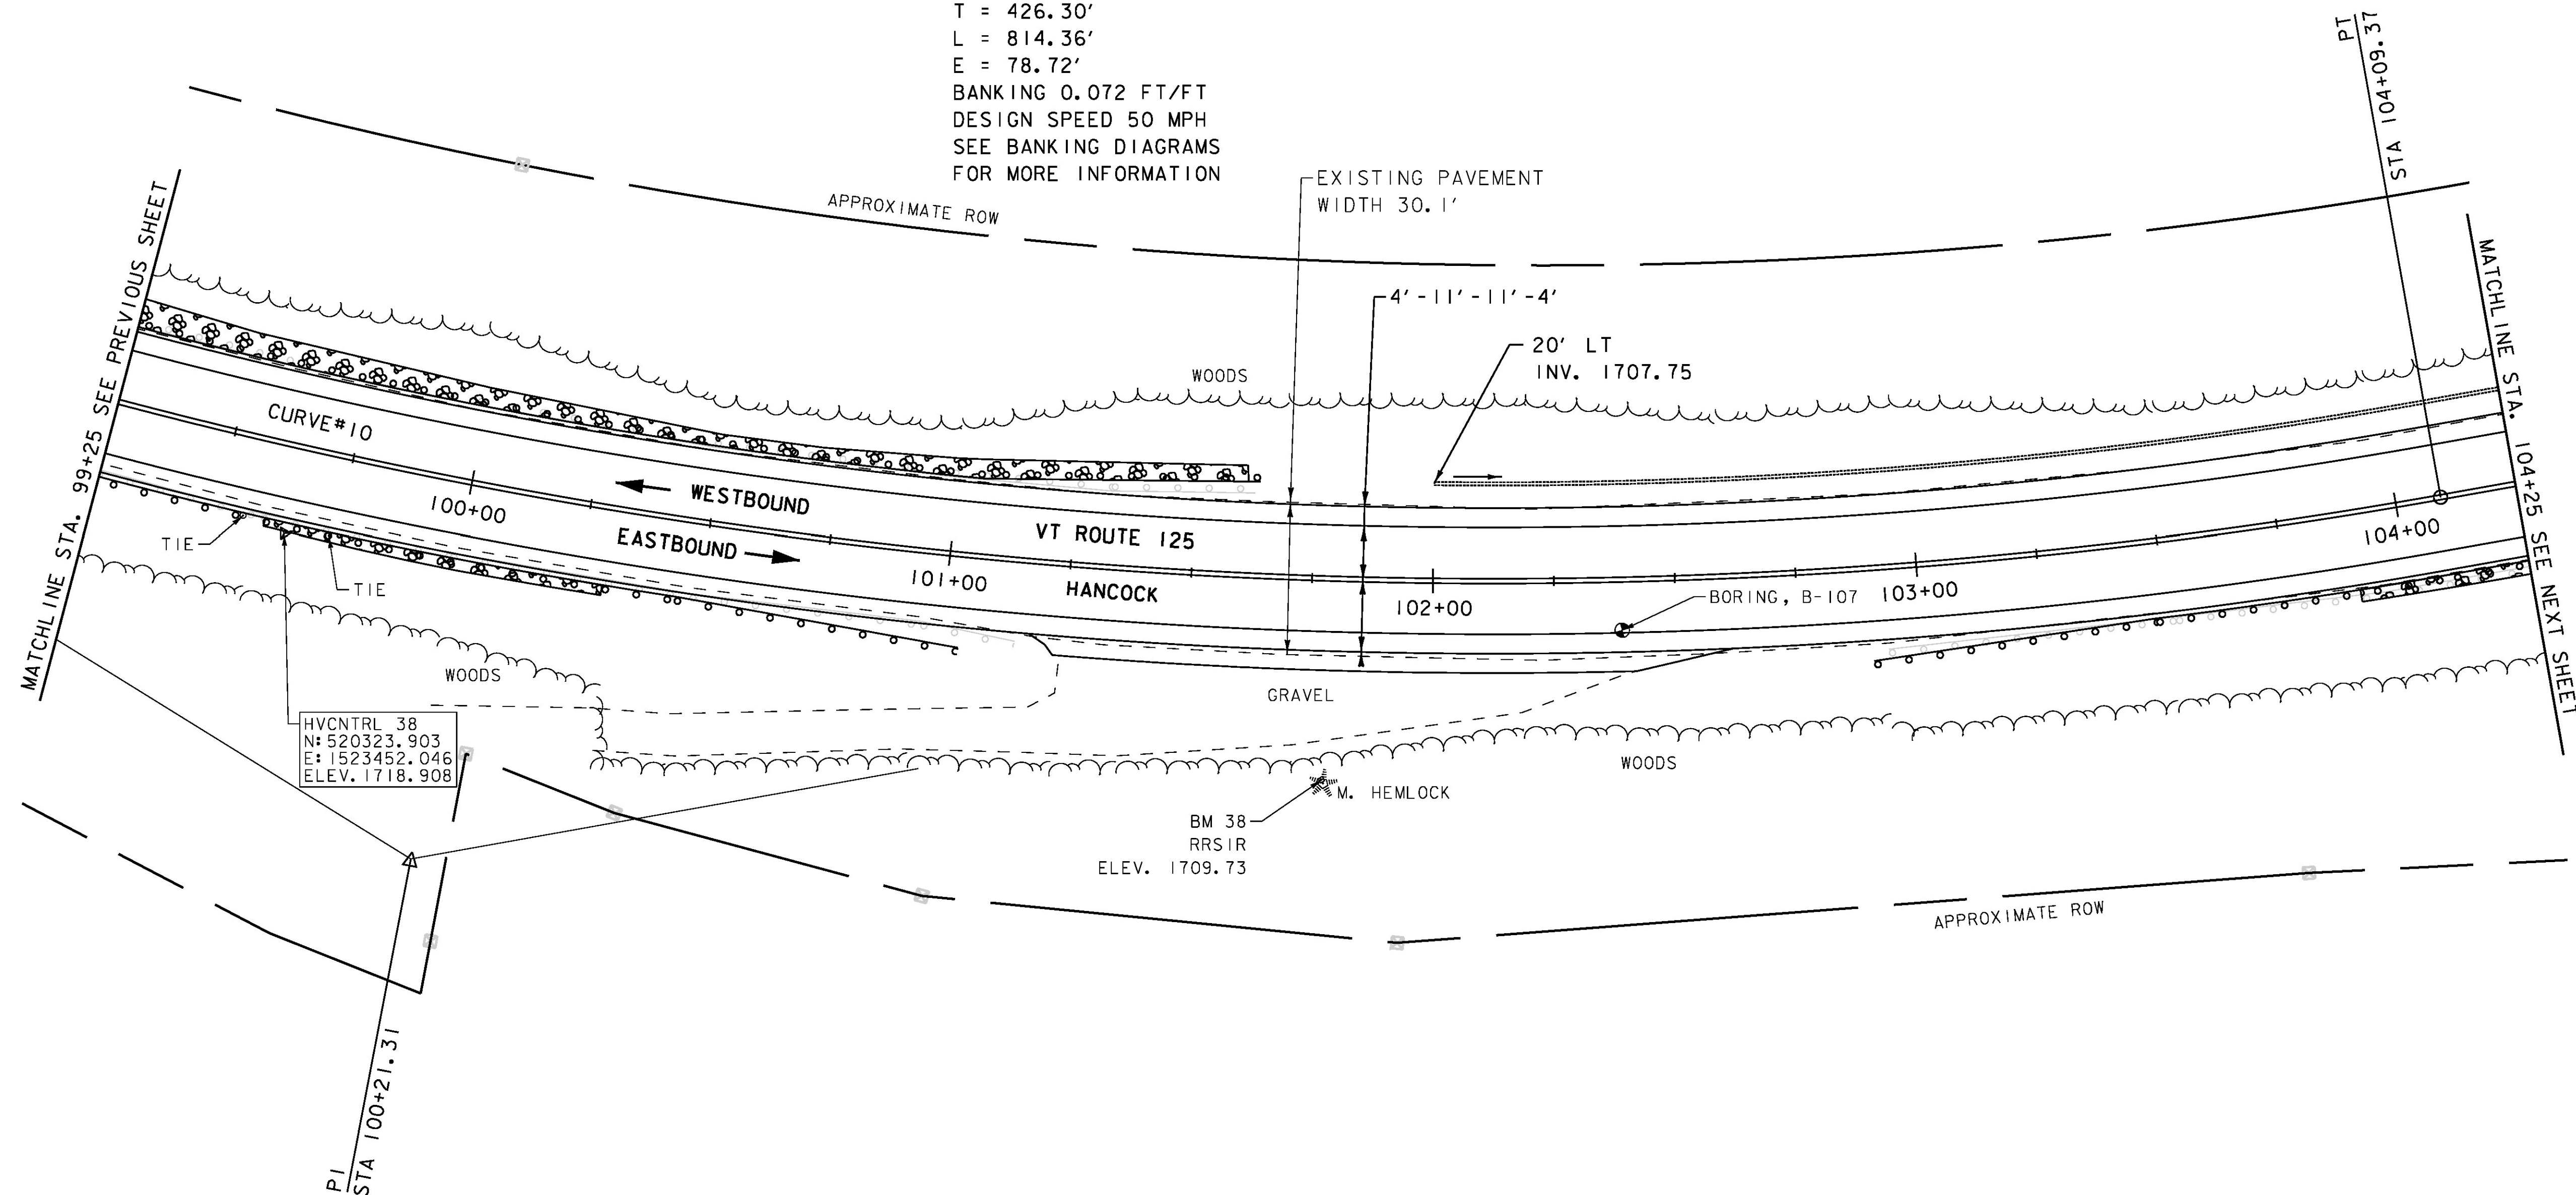

**SIGN LEGEND**  
 R = REMOVE  
 R&S = REMOVE AND SALVAGE  
 RET = RETAIN  
 S = SALVAGED  
 N = NEW  
 B-B = BACK TO BACK  
 --- = EXISTING  
 — = NEW



PROJECT NAME: HANCOCK	PLOT DATE: 3/18/2015
PROJECT NUMBER: STP 2923 (1)	DRAWN BY: J. GOODALL
FILE NAME: z10c252bdr.dgn	DESIGNED BY: B. MARTIN
PROJECT LEADER: C. LATHROP	CHECKED BY: C. LATHROP
PROJECT LAYOUT SHEET 12	SHEET 44 OF 207