

6 INCH UNDERDRAIN PIPE
 STA. 104+25 - STA. 106+00 LT
 STA. 106+50 - STA. 109+75 LT
 STA. 107+00 - STA. 109+75 RT

STONE FILL, TYPE I
 STA. 104+25 - STA. 104+90 RT

REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. 104+25 - STA. 106+35 RT

DURABLE 4 INCH WHITE LINE (SEE OPTION ITEMS)
 STA. 104+25 - STA. 109+75 (SOLID LT & RT)

DURABLE 4 INCH YELLOW LINE (SEE OPTION ITEMS)
 STA. 104+25 - STA. 109+75 (SOLID LT & RT)

TEMPORARY 4 INCH WHITE LINE, PAINT
 STA. 104+25 - STA. 109+75 (SOLID LT & RT)



TEMPORARY 4 INCH YELLOW LINE, PAINT
 STA. 104+25 - STA. 109+75 (SOLID LT & RT)

GEOTEXTILE FOR SILT FENCE
 STA. 104+25 - STA. 104+90 RT

GRUBBING MATERIAL (6")
 STA. 104+25 - STA. 104+90 RT

SPECIAL PROVISION (BOX BEAM GUARDRAIL W/7 FEET POSTS)
 STA. 104+25 - STA. 106+43.5 RT

CURVE #11
 DELTA = 31°03'38"
 D = 5°09'42"
 R = 1110.00'
 T = 308.46'
 L = 601.74'
 E = 42.06'
 BANKING 0.072 FT/FT
 DESIGN SPEED 50 MPH
 SEE BANKING DIAGRAMS
 FOR MORE INFORMATION

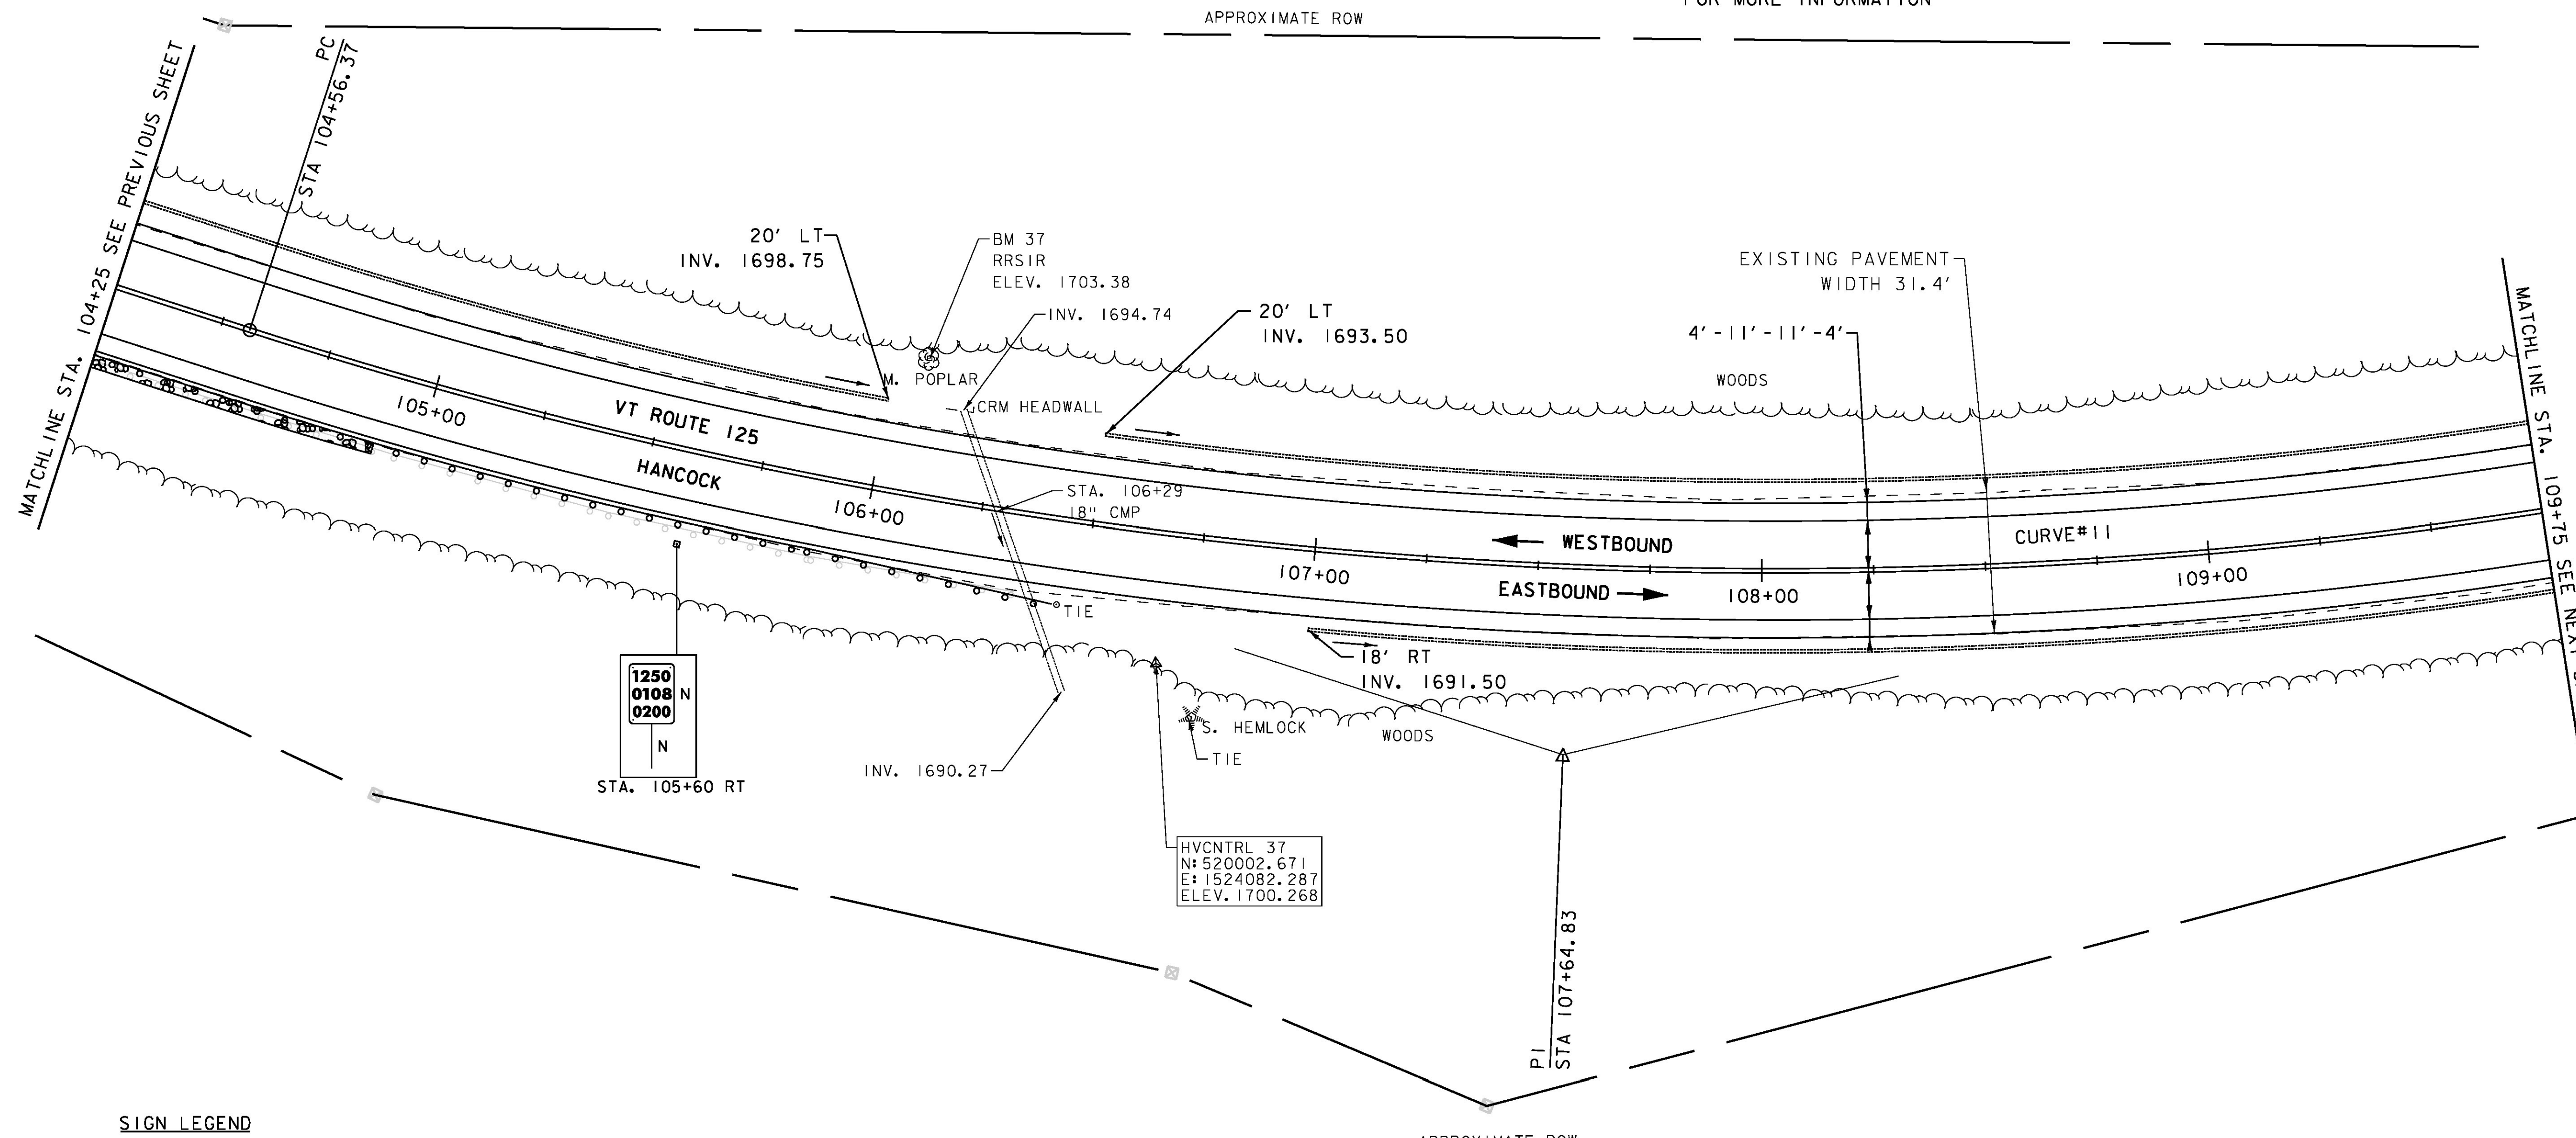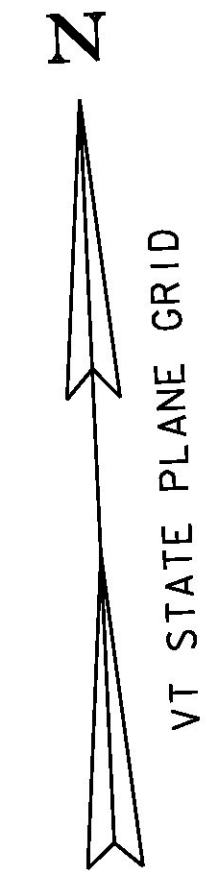

SIGN LEGEND
 R = REMOVE
 R&S = REMOVE AND SALVAGE
 RET = RETAIN
 S = SALVAGED
 N = NEW
 B-B = BACK TO BACK
 - - = EXISTING
 — = NEW



PROJECT NAME: HANCOCK	PLOT DATE: 3/18/2015
PROJECT NUMBER: STP 2923 (1)	DRAWN BY: J. GOODALL
FILE NAME: z10c252bdr.dgn	CHECKED BY: C. LATHROP
DESIGNED BY: B. MARTIN	SHEET 45 OF 207
PROJECT LAYOUT SHEET 13	