

6 INCH UNDERDRAIN PIPE
 STA. 120+25 - STA. 122+00 LT
 STA. 123+00 - STA. 125+00 LT

STONE FILL, TYPE 1
 STA. 122+10 - STA. 122+20 LT

REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. 121+48 - STA. 125+25 RT

DURABLE 4 INCH WHITE LINE (SEE OPTION ITEMS)
 STA. 120+25 - STA. 125+25 (SOLID LT & RT)

DURABLE 4 INCH YELLOW LINE (SEE OPTION ITEMS)
 STA. 120+25 - STA. 125+25 (SOLID LT & RT)

TEMPORARY 4 INCH WHITE LINE, PAINT
 STA. 120+25 - STA. 125+25 (SOLID LT & RT)


TEMPORARY 4 INCH YELLOW LINE, PAINT
 STA. 120+25 - STA. 125+25 (SOLID LT & RT)

GEOTEXTILE FOR SILT FENCE
 STA. 122+10 - STA. 122+20 LT

GRUBBING MATERIAL (6")
 STA. 122+10 - STA. 122+20 LT

SPECIAL PROVISION (BOX BEAM GUARDRAIL W/7 FEET POSTS)
 STA. 121+37.5 - STA. 125+25 RT

CURVE #13
 DELTA = 18°37'58"
 D = 4°46'29"
 R = 1200.00'
 T = 196.86'
 L = 390.25'
 E = 16.04'
 BANKING 0.070 FT/FT
 DESIGN SPEED 50 MPH
 SEE BANKING DIAGRAMS
 FOR MORE INFORMATION

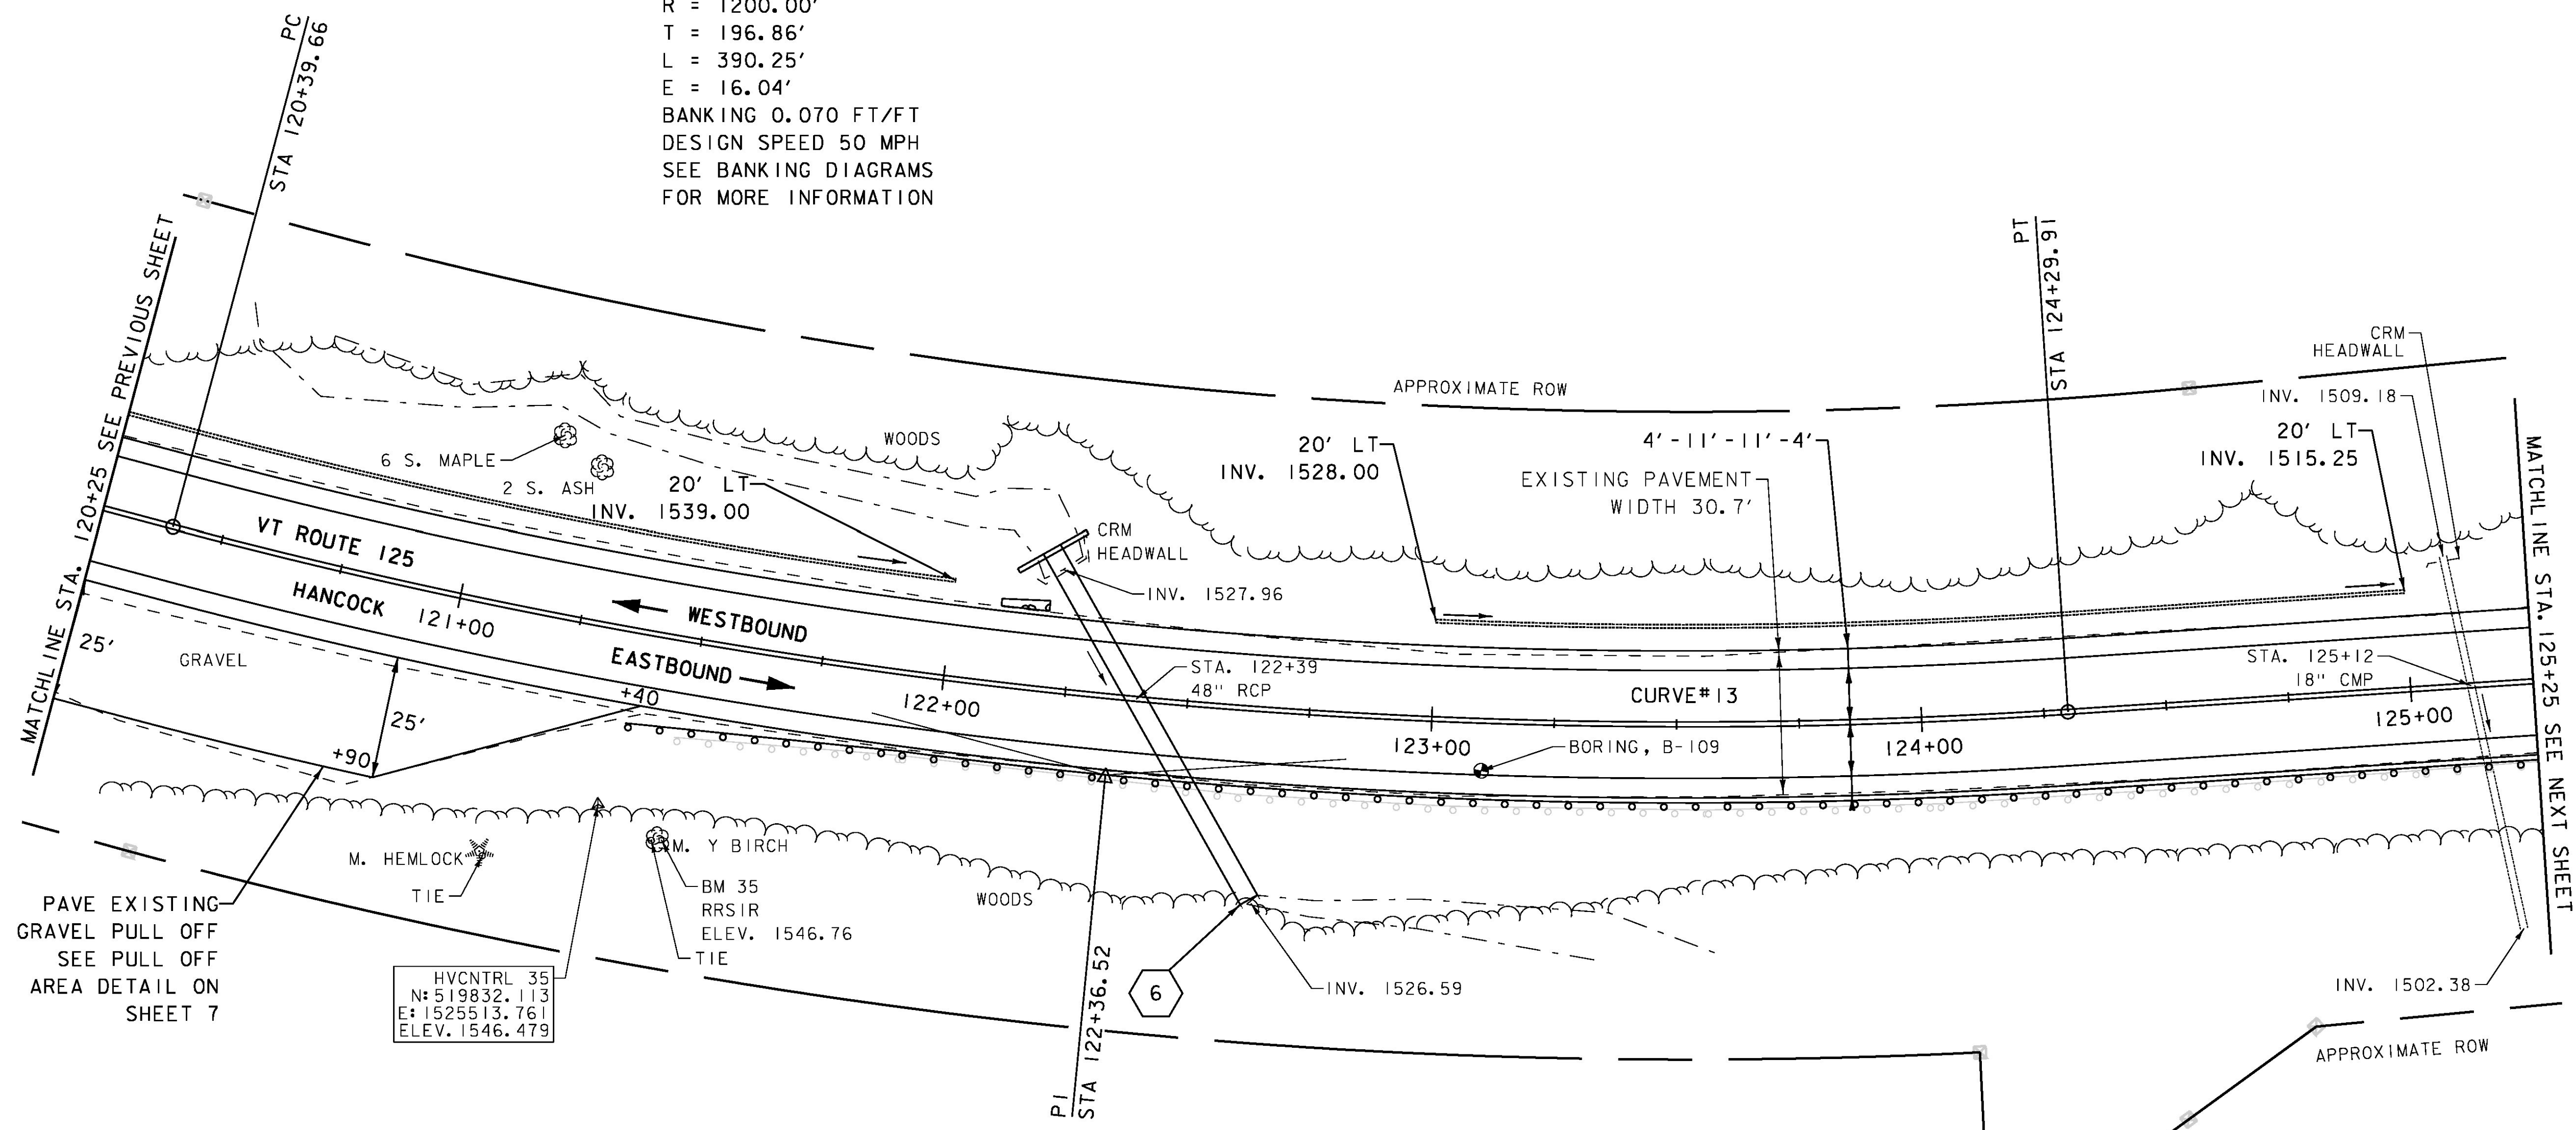

SIGN LEGEND

R = REMOVE
 R&S = REMOVE AND SALVAGE
 RET = RETAIN
 S = SALVAGED
 N = NEW
 B-B = BACK TO BACK
 - - = EXISTING
 — = NEW

6 STA. 122+21.50 LT 25.36' TO
 STA. 122+65.39 RT 38.94'
 ASKEW ANGLE = 55.5344° RT
 REMOVE EXISTING PIPE
 INSTALL 48" PCCSP (78'-0")
 INV. IN = 1527.98'
 INV. OUT = 1526.31'



PROJECT NAME: HANCOCK	
PROJECT NUMBER: STP 2923 (1)	
FILE NAME: z10c252bdr.dgn	PLOT DATE: 3/18/2015
PROJECT LEADER: C. LATHROP	DRAWN BY: J. GOODALL
DESIGNED BY: B. MARTIN	CHECKED BY: C. LATHROP
PROJECT LAYOUT SHEET 16	SHEET 48 OF 207