

6 INCH UNDERDRAIN PIPE
 STA. 235+25 - STA. 239+00 LT
 STA. 235+25 - STA. 239+50 RT
 STA. 239+50 - STA. 240+50 LT



DURABLE 4 INCH WHITE LINE (SEE OPTION ITEMS)
 STA. 235+25 - STA. 240+50 (SOLID LT & RT)

DURABLE 4 INCH YELLOW LINE (SEE OPTION ITEMS)
 STA. 235+25 - STA. 240+50 (SOLID LT & RT)

TEMPORARY 4 INCH WHITE LINE, PAINT
 STA. 235+25 - STA. 240+50 (SOLID LT & RT)

TEMPORARY 4 INCH YELLOW LINE, PAINT
 STA. 235+25 - STA. 240+50 (SOLID LT & RT)

REMOVING SIGNS
 AS SHOWN - I

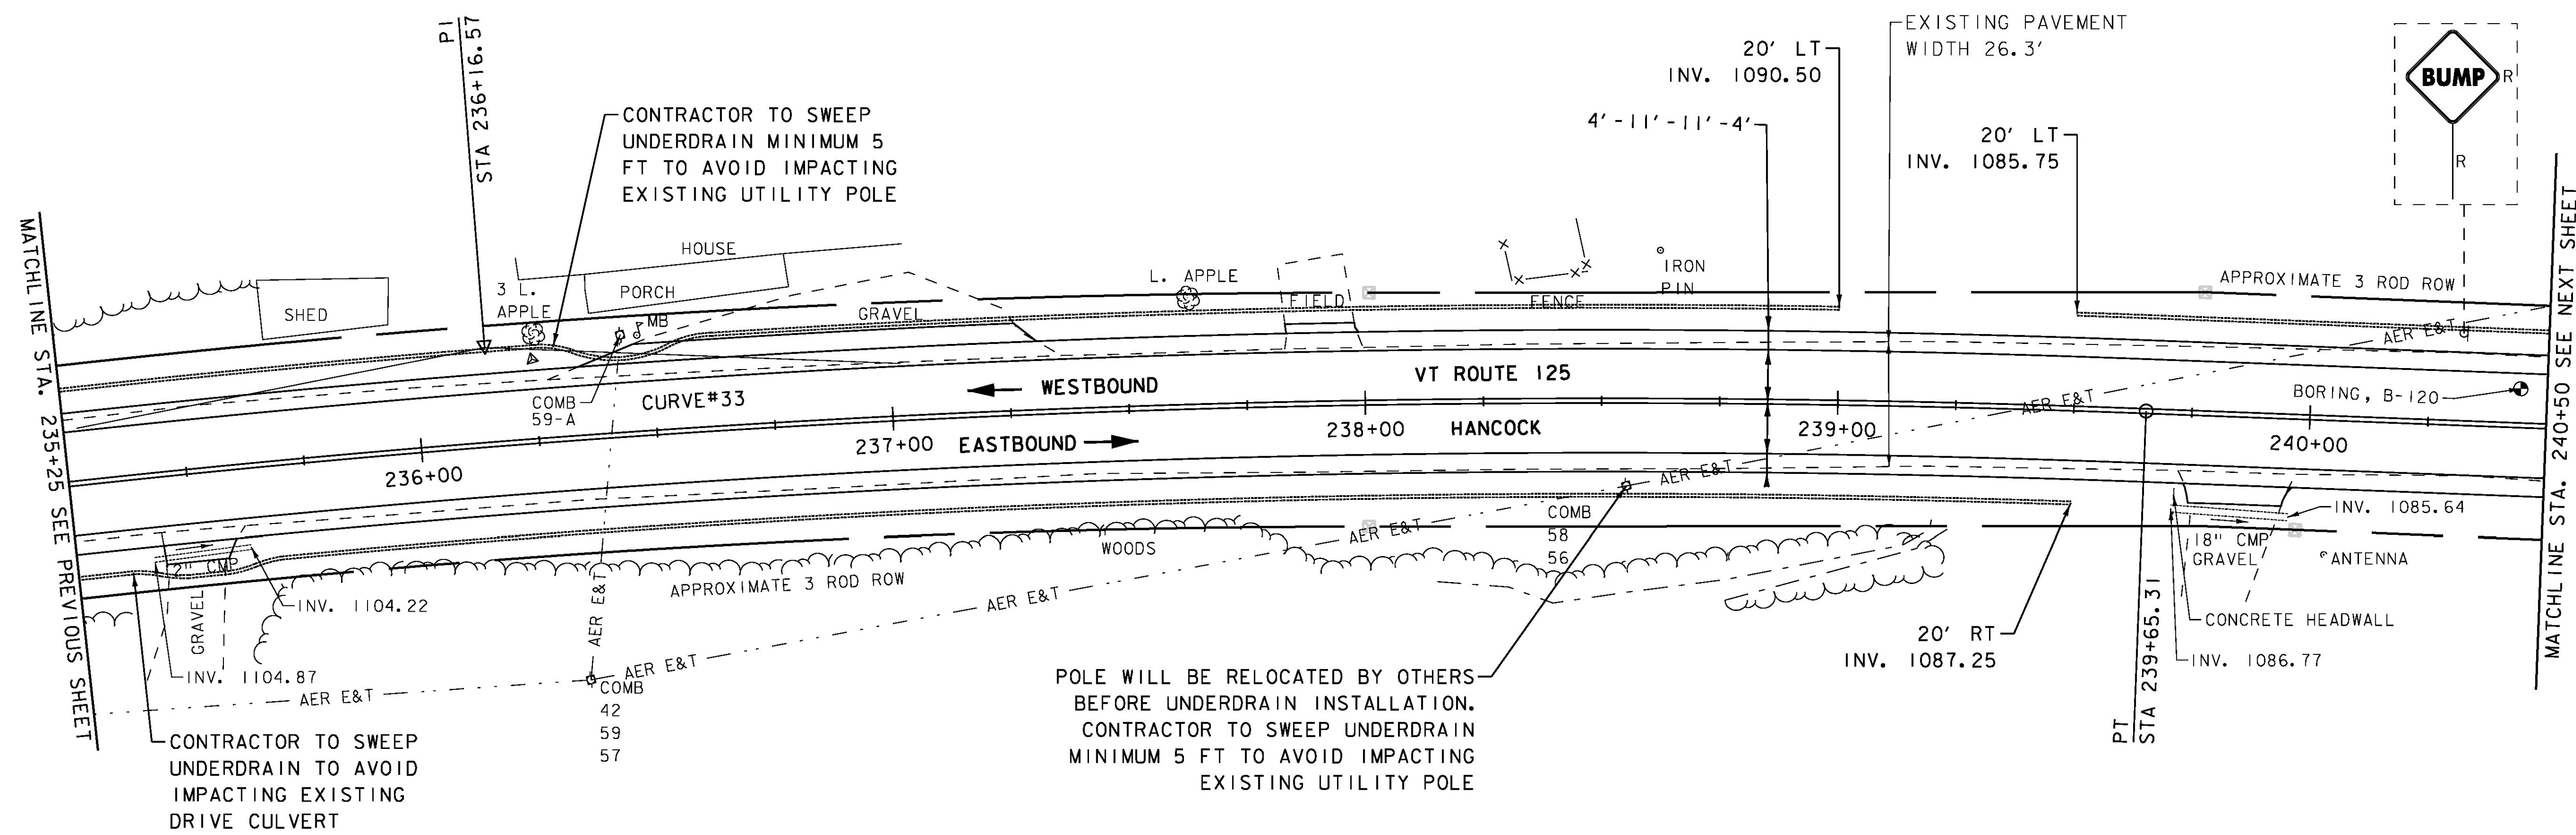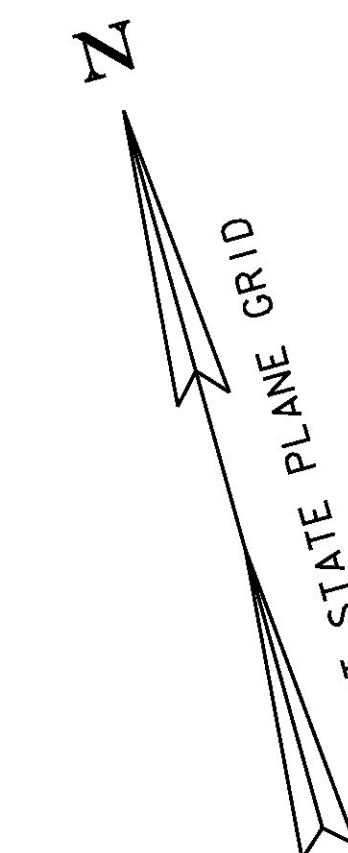

CURVE #33
 DELTA = 13°22'55"
 D = 1°54'35"
 R = 3000.00'
 T = 351.94'
 L = 700.68'
 E = 20.57'
 BANKING 0.037 FT/FT
 DESIGN SPEED 50 MPH
 SEE BANKING DIAGRAMS
 FOR MORE INFORMATION

SIGN LEGEND
 R = REMOVE
 R&S = REMOVE AND SALVAGE
 RET = RETAIN
 S = SALVAGED
 N = NEW
 B-B = BACK TO BACK
 --- = EXISTING
 — = NEW



PROJECT NAME: HANCOCK	
PROJECT NUMBER: STP 2923 (1)	
FILE NAME: z10c252bdr.dgn	PLOT DATE: 3/18/2015
PROJECT LEADER: C. LATHROP	DRAWN BY: J. GOODALL
DESIGNED BY: B. MARTIN	CHECKED BY: C. LATHROP
PROJECT LAYOUT SHEET 38	SHEET 70 OF 207