

STONE FILL, TYPE 1
 STA. 285+10 - STA. 285+20 RT
 STA. 285+40 - STA. 285+50 RT
 STA. 286+10 - STA. 286+50 RT

DURABLE 4 INCH WHITE LINE (SEE OPTION ITEMS)
 STA. 281+50 - STA. 286+50 (SOLID LT & RT)
 DURABLE 4 INCH YELLOW LINE (SEE OPTION ITEMS)
 STA. 281+50 - STA. 286+50 (SOLID LT & RT)

GEOTEXTILE FOR SILT FENCE
 STA. 285+10 - STA. 285+20 RT
 STA. 285+40 - STA. 285+50 RT
 STA. 286+10 - STA. 286+50 RT



CURVE #41
 DELTA = 37°59'59"
 D = 7°38'22"
 R = 750.00'
 T = 258.24'
 L = 497.42'
 E = 43.21'
 BANKING 0.080 FT/FT
 DESIGN SPEED 45 MPH
 SEE BANKING DIAGRAMS
 FOR MORE INFORMATION

TEMPORARY 4 INCH WHITE LINE, PAINT
 STA. 281+50 - STA. 286+50 (SOLID LT & RT)

TEMPORARY 4 INCH YELLOW LINE, PAINT
 STA. 281+50 - STA. 286+50 (SOLID LT & RT)

GRUBBING MATERIAL (6")
 STA. 285+10 - STA. 285+20 RT
 STA. 285+40 - STA. 285+50 RT
 STA. 286+10 - STA. 286+50 RT

SPECIAL PROVISION (BOX BEAM
 GUARDRAIL W/7 FEET POSTS)
 STA. 283+85.5 - STA. 286+50 RT

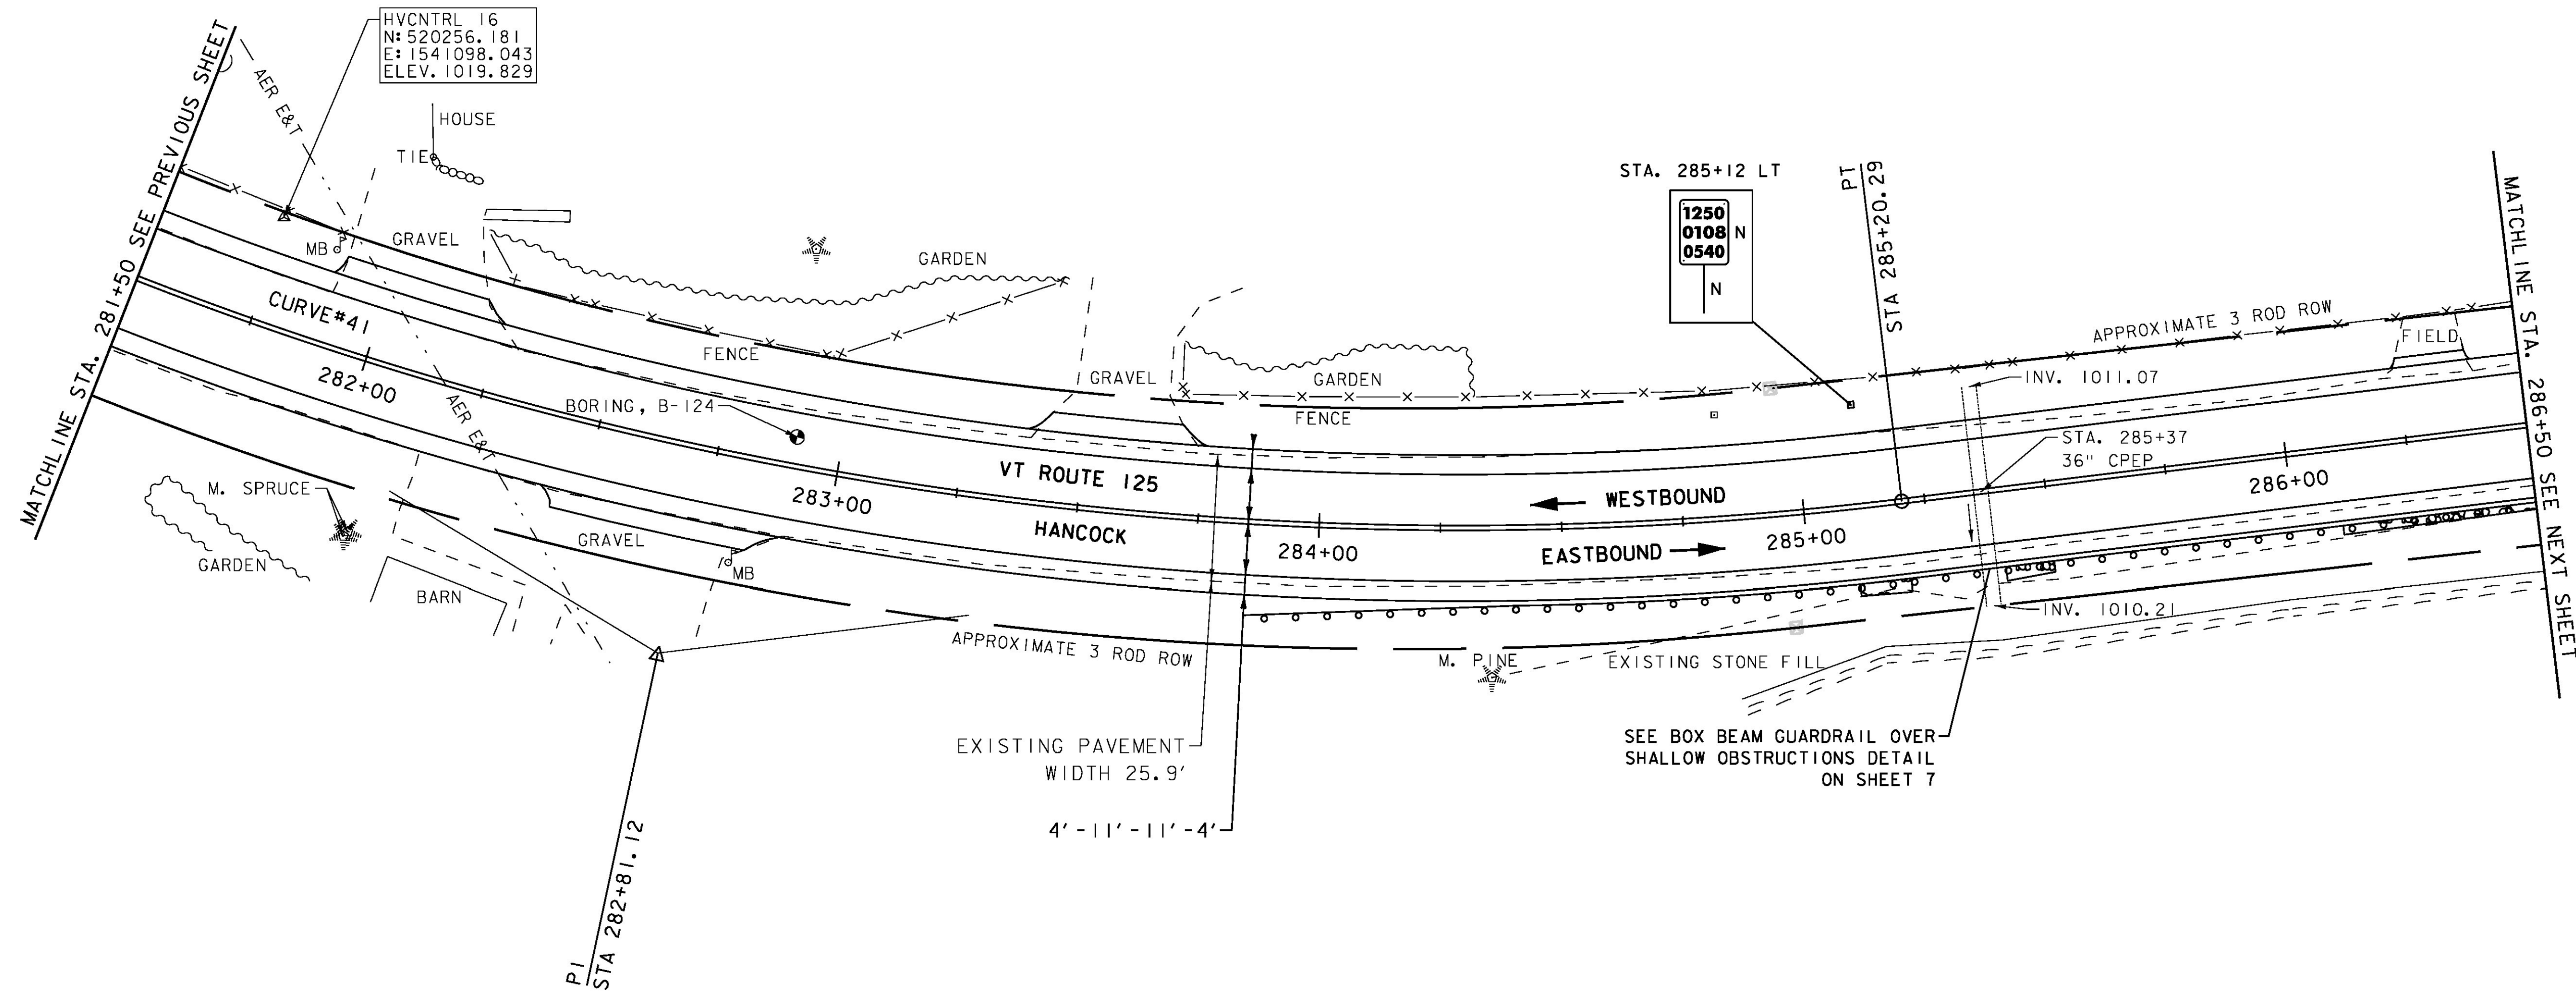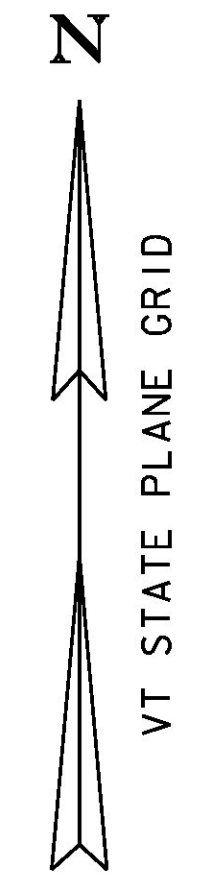

SIGN LEGEND
 R = REMOVE
 R&S = REMOVE AND SALVAGE
 RET = RETAIN
 S = SALVAGED
 N = NEW
 B-B = BACK TO BACK
 - - = EXISTING
 — = NEW



PROJECT NAME: HANCOCK	
PROJECT NUMBER: STP 2923 (1)	
FILE NAME: z10c252bdr.dgn	PLOT DATE: 3/18/2015
PROJECT LEADER: C. LATHROP	DRAWN BY: J. GOODALL
DESIGNED BY: B. MARTIN	CHECKED BY: C. LATHROP
PROJECT LAYOUT SHEET 47	SHEET 79 OF 207