

6 INCH UNDERDRAIN PIPE
 STA. 335+25 - STA. 337+00 LT
 STA. 339+50 - STA. 340+50 LT

STONE FILL, TYPE I
 STA. 335+25 - STA. 339+10 RT

RELOCATE MAILBOX, SINGLE SUPPORT
 STA. 338+72 LT
 STA. 340+38 LT

REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. 335+25 - STA. 340+50 RT

DURABLE 4 INCH WHITE LINE (SEE OPTION ITEMS)
 STA. 335+25 - STA. 340+50 (SOLID LT & RT)

DURABLE 4 INCH YELLOW LINE (SEE OPTION ITEMS)
 STA. 335+25 - STA. 340+50 (SOLID LT & RT)

TEMPORARY 4 INCH WHITE LINE, PAINT
 STA. 335+25 - STA. 340+50 (SOLID LT & RT)



TEMPORARY 4 INCH YELLOW LINE, PAINT
 STA. 335+25 - STA. 340+50 (SOLID LT & RT)

GEOTEXTILE FOR SILT FENCE
 STA. 335+25 - STA. 339+10 RT

GRUBBING MATERIAL (6")
 STA. 335+25 - STA. 339+10 RT

REMOVING SIGNS
 AS SHOWN - I

SPECIAL PROVISION (BOX BEAM
 GUARDRAIL W/7 FEET POSTS)
 STA. 335+25 - STA. 340+50 RT

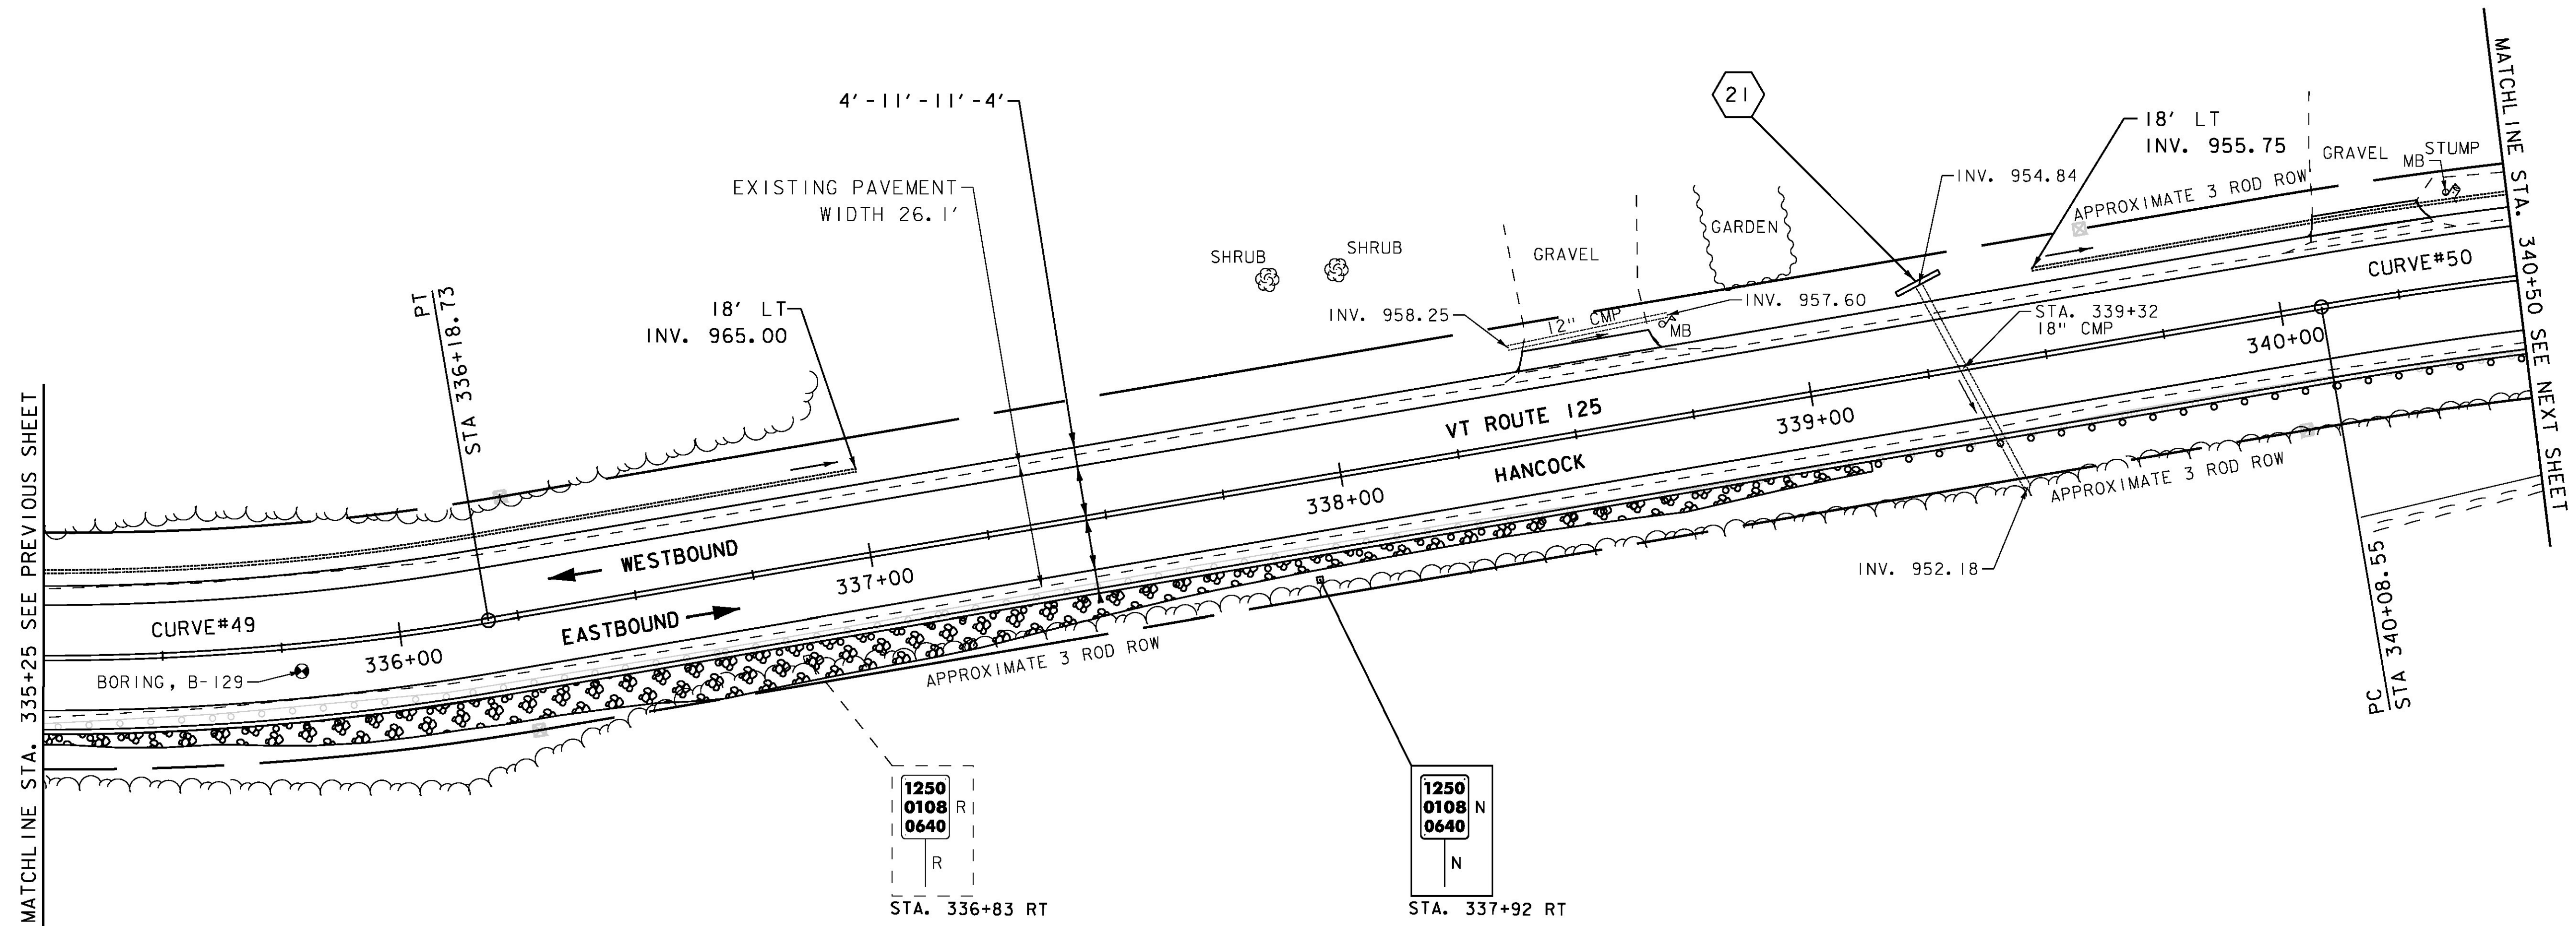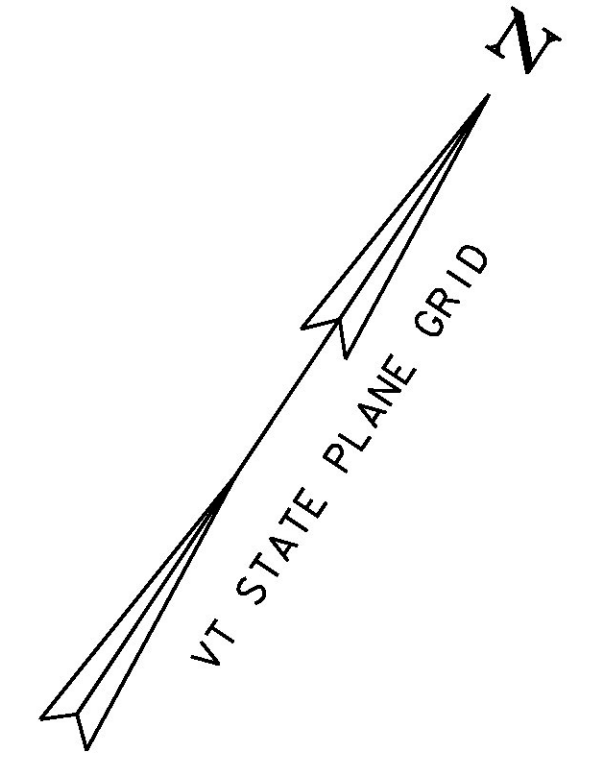

SIGN LEGEND

R = REMOVE
 R&S = REMOVE AND SALVAGE
 RET = RETAIN
 S = SALVAGED
 N = NEW
 B-B = BACK TO BACK
 - - = EXISTING
 — = NEW

21 STA. 339+25.81 LT 19.64' TO
 STA. 339+41.42 RT 26.89'
 CONSTRUCT CONCRETE REINFORCED
 HEADWALL PER STD. D-33. USE
 SCHEDULING AND DIMENSIONS FOR
 42" PIPE, LT
 INV. IN = 954.84'
 INV. OUT = 952.18'

PROJECT NAME: HANCOCK	PLOT DATE: 3/18/2015
PROJECT NUMBER: STP 2923 (1)	DRAWN BY: J. GOODALL
FILE NAME: z10c252bdr.dgn	CHECKED BY: C. LATHROP
PROJECT LEADER: C. LATHROP	SHEET 89 OF 207
DESIGNED BY: B. MARTIN	
PROJECT LAYOUT SHEET 57	

