

STEEL BEAM GUARDRAIL, GALVANIZED
STA. 172+70 TO 175+00, LT


ANCHOR FOR STEEL BEAM RAIL
STA. 172+70, LT

REMOVAL AND DISPOSAL OF GUARDRAIL
STA. 172+71.5 TO 175+00, LT

DURABLE & TEMPORARY 4 INCH WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS
AND RADII FOR SIDE ROADS)
STA. 170+00 TO 175+00, SOLID LT & RT

DURABLE & TEMPORARY 4 INCH YELLOW LINE
(ALL LINES WILL INCLUDE $\frac{1}{2}$ BREAKS FOR SIDE ROADS)
STA. 170+00 TO 175+00, SOLID LT & RT

REMOVING SIGNS
AS SHOWN - 1

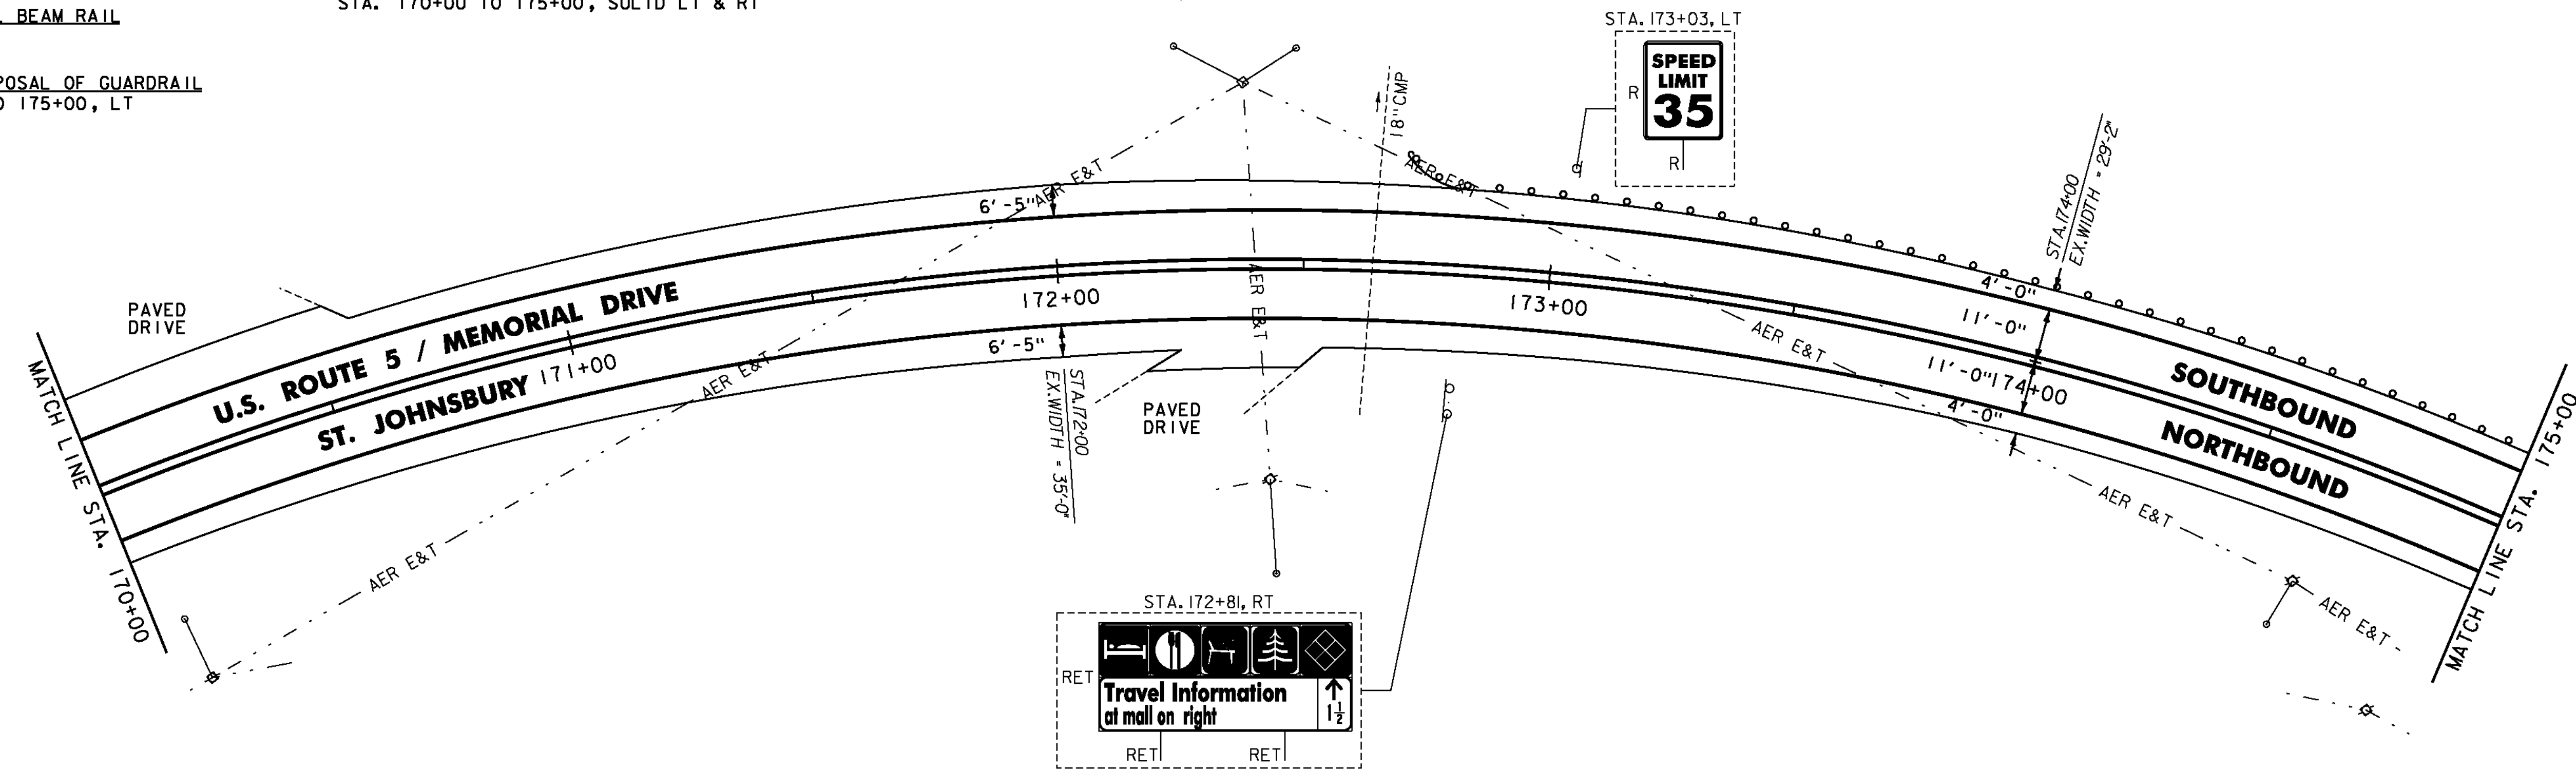

RELOCATE MAILBOX, SINGLE SUPPORT
STA. 178+50, RT

STONE FILL, TYPE I
STA. 175+72 TO 175+97, LT

STEEL BEAM GUARDRAIL, GALVANIZED
STA. 175+00 TO 175+76, LT
STA. 176+01 TO 180+00, LT

REMOVAL AND DISPOSAL OF GUARDRAIL
STA. 175+00 TO 180+00, LT

HD STEEL BEAM GUARDRAIL, GALVANIZED/NESTED
STA. 175+76 TO 176+01, LT


DURABLE & TEMPORARY 4 INCH WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS
AND RADII FOR SIDE ROADS)
STA. 175+00 TO 180+00, SOLID LT & RT

DURABLE & TEMPORARY 4 INCH YELLOW LINE
(ALL LINES WILL INCLUDE $\frac{1}{2}$ BREAKS FOR SIDE ROADS)
STA. 175+00 TO 180+00, SOLID LT & RT

GEOTEXTILE UNDER STONE FILL
STA. 175+72 TO 175+97, LT

GRUBBING MATERIAL
STA. 175+72 TO 175+97, LT

REMOVING SIGNS
AS SHOWN - 1

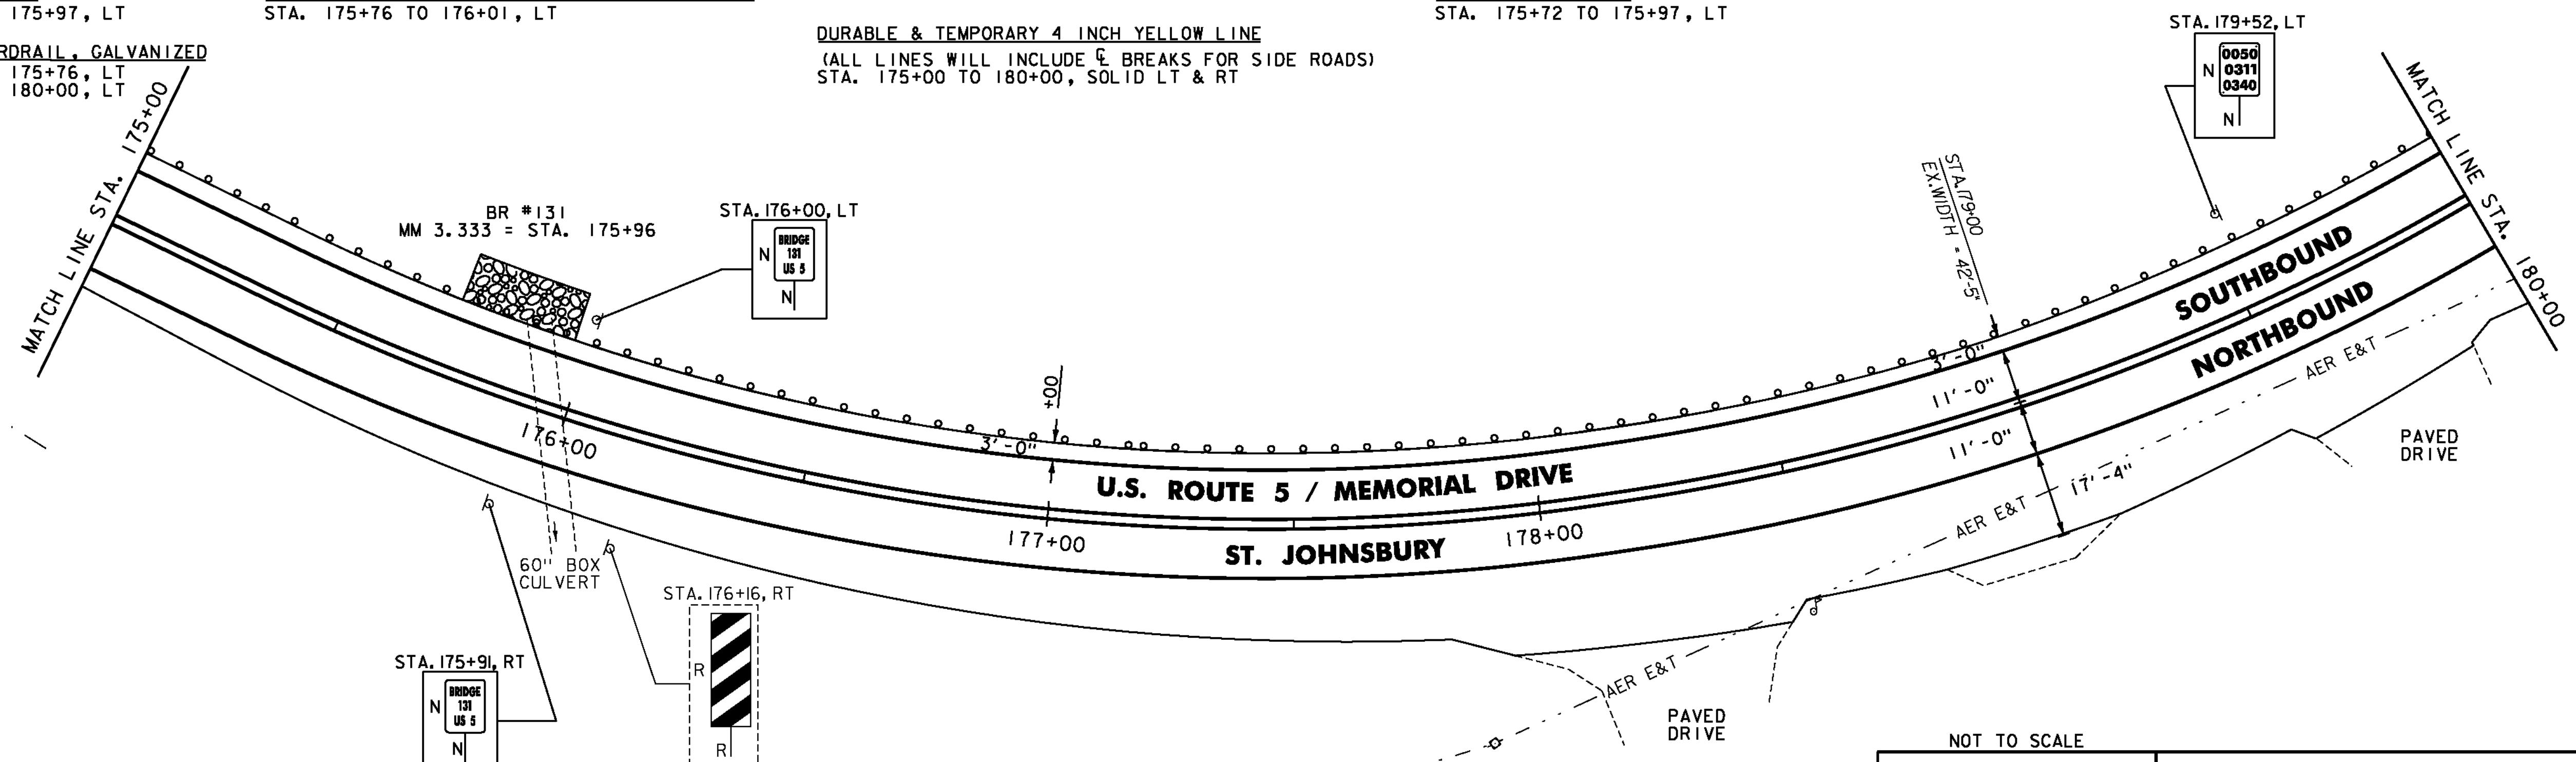

NOTES:

- FOR LEGENDS, SEE SHEET 33.
- ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.
- DURABLE MARKINGS DETAILED ON THIS SHEET ARE OPTION BID ITEMS. SEE SHEETS 6-7.

NOT TO SCALE

PROJECT LAYOUT SHEET #3



PROJECT NAME: ST. JOHNSBURY-LYNDON

PROJECT NUMBER: STP 2928(I)

FILE NAME: p10c262.dgn

PROJECT LEADER: JLL

DESIGNED BY: MCF

IPARM FILE: p10c262103.i

PLOT DATE: 10/17/2013

DRAWN BY: STANTEC

CHECKED BY: JLL

SHEET 35 OF 133