

REHAB. Dis. CBs OR MHS. CLASS I OR II  
 STA. 222+20, RT  
 STA. 224+55, RT

DURABLE & TEMPORARY 4 INCH WHITE LINE  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS  
 AND RADII FOR SIDE ROADS)  
 STA. 220+75 TO 225+75, SOLID LT & RT


DURABLE & TEMPORARY 4 INCH YELLOW LINE  
 (ALL LINES WILL INCLUDE  $\frac{1}{4}$  BREAKS FOR SIDE ROADS)  
 STA. 220+75 TO 225+75, SOLID LT & RT  
 STA. 224+28, DOUBLE SOLID RT (STETSON TERRACE TH-21)

DURABLE & TEMPORARY 8 INCH WHITE LINE  
 STA. 223+98 TO 224+10, SOLID RT (HYDRANT)  
 SEE DETAIL ON SHEET 29

DURABLE & TEMPORARY 24 INCH STOP BAR  
 STA. 224+28, RT (STETSON TERRACE TH-21)

DURABLE & TEMPORARY LETTER OR SYMBOL  
 STA. 224+28, RT (STETSON TERRACE TH-21) "STOP"

REMOVING SIGNS  
 AS SHOWN - 6

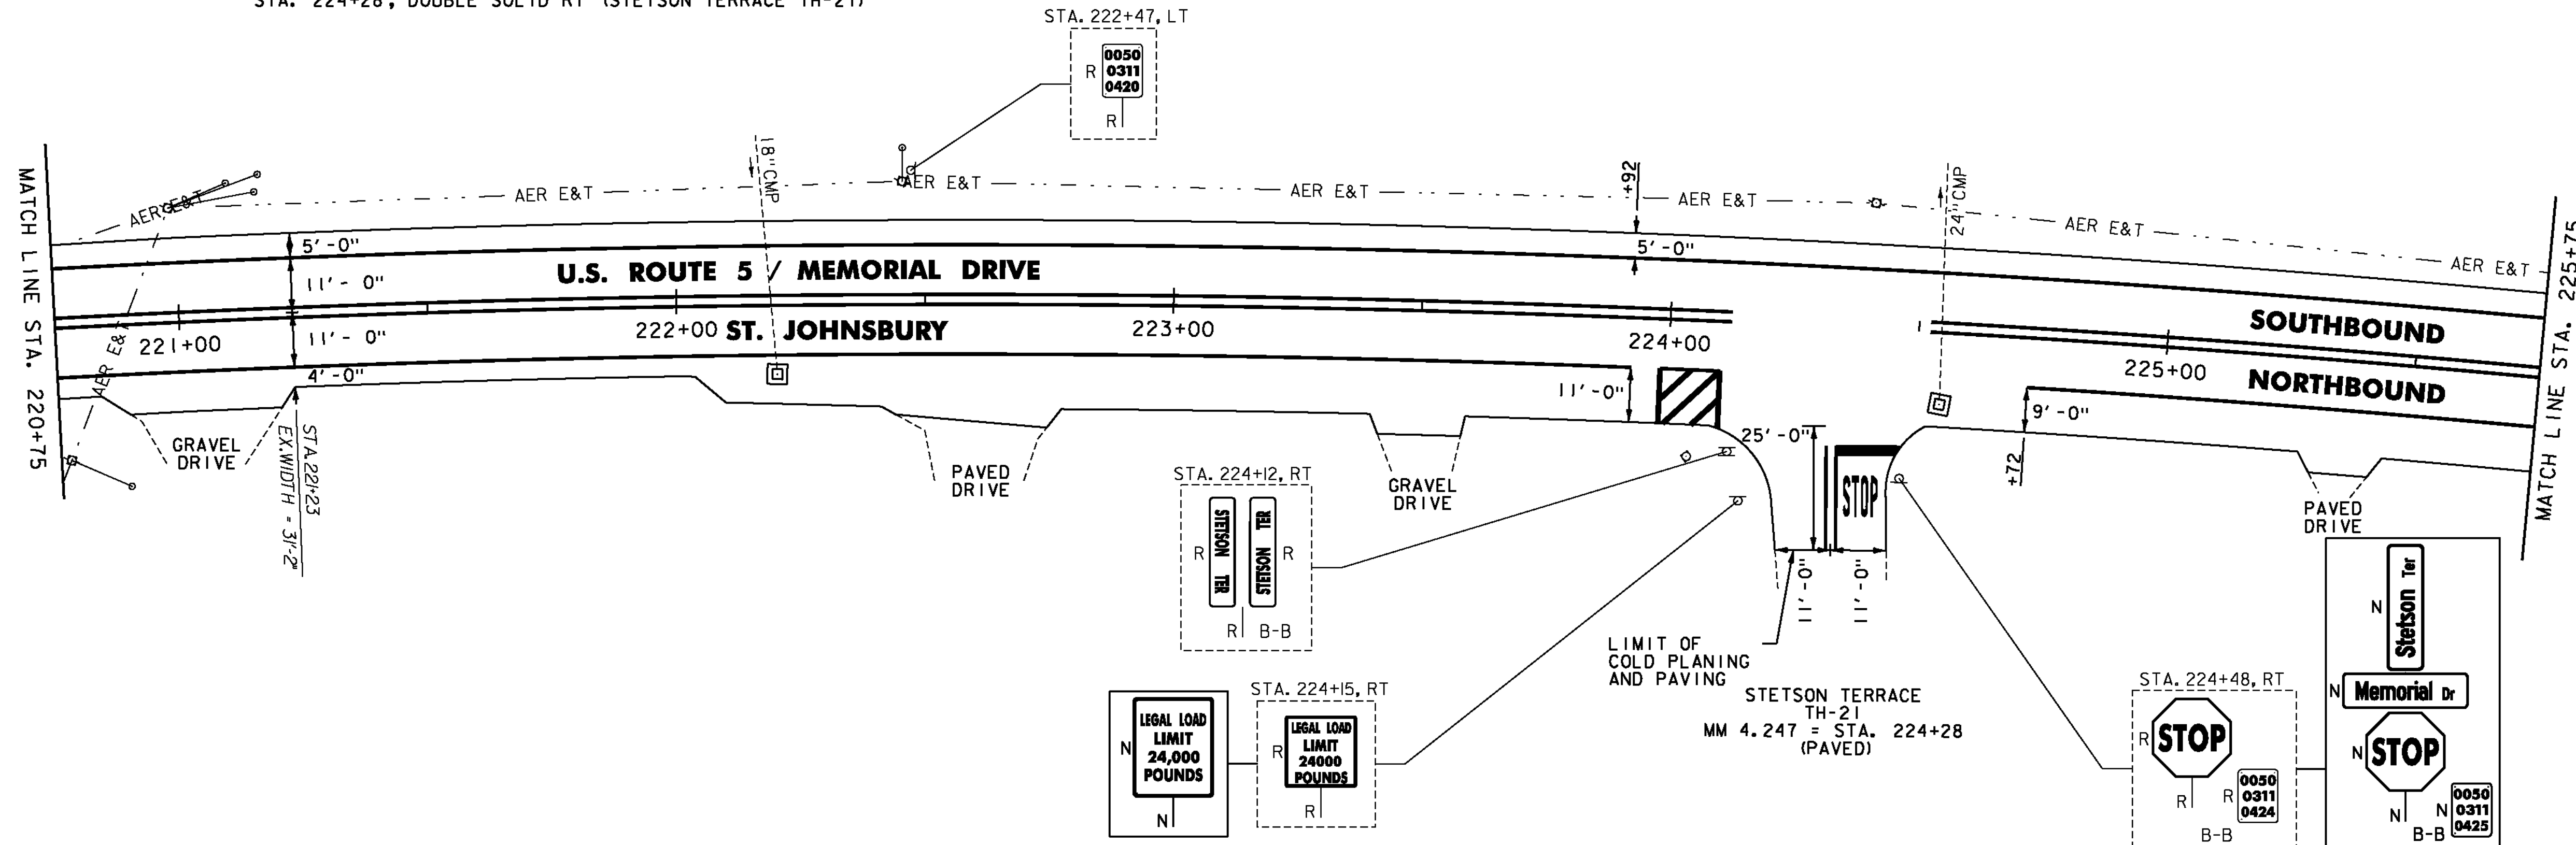

REHAB. Dis. CBs OR MHS. CLASS I OR II  
 STA. 226+82, RT

STEEL BEAM GUARDRAIL, GALVANIZED  
 STA. 227+95 TO 230+00, LT

ANCHOR FOR STEEL BEAM RAIL  
 STA. 227+95, LT


REMOVAL AND DISPOSAL OF GUARDRAIL  
 STA. 227+95 TO 230+00, LT

ADJUST ELEVATION OF VALVE BOX  
 STA. 229+53, RT

DURABLE & TEMPORARY 4 INCH WHITE LINE  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS  
 AND RADII FOR SIDE ROADS)  
 STA. 225+75 TO 230+00, SOLID LT & RT

DURABLE & TEMPORARY 4 INCH YELLOW LINE  
 (ALL LINES WILL INCLUDE  $\frac{1}{4}$  BREAKS FOR SIDE ROADS)  
 STA. 225+75 TO 230+00, SOLID LT & RT

REMOVING SIGNS  
 AS SHOWN - 4

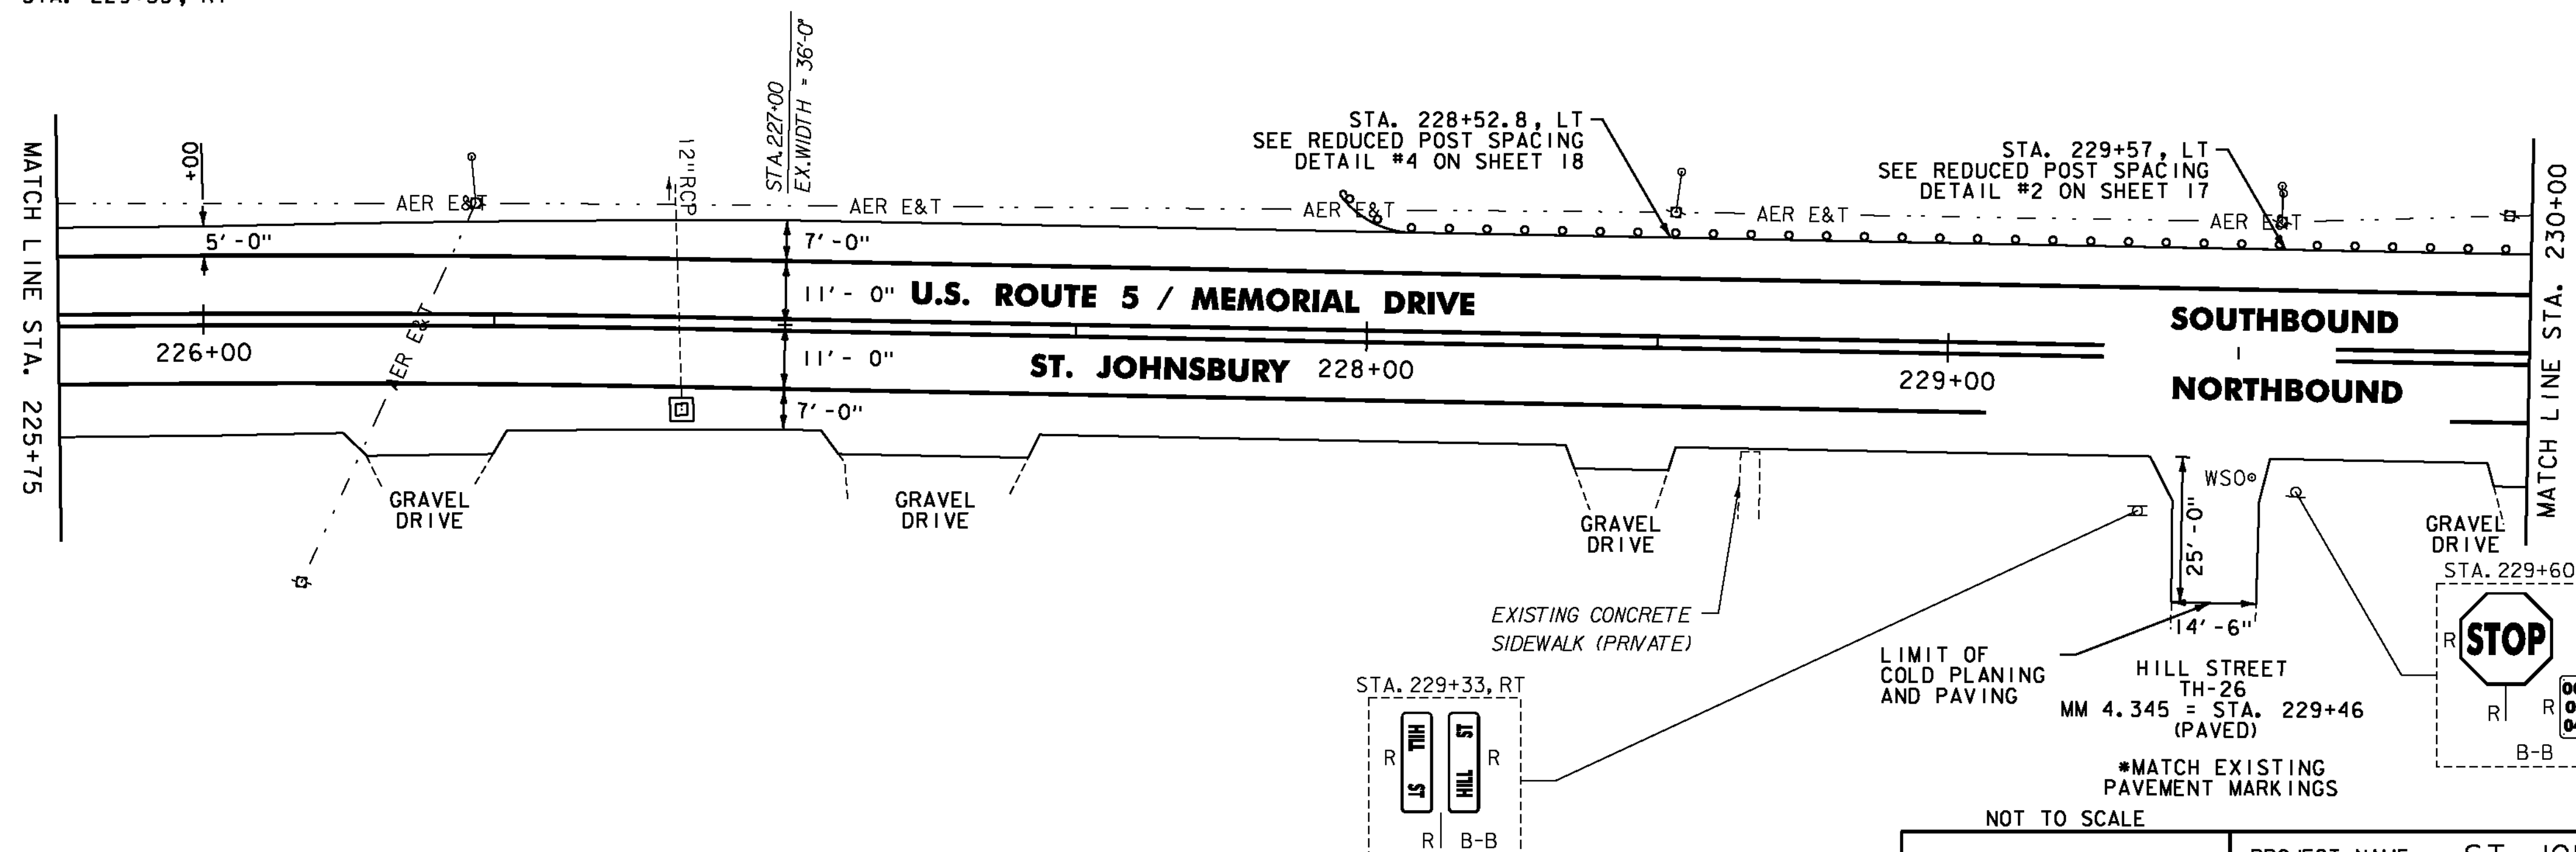

NOTES:

- FOR LEGENDS, SEE SHEET 33.
- ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.
- DURABLE MARKINGS DETAILED ON THIS SHEET ARE OPTION BID ITEMS. SEE SHEETS 6-7.



**PROJECT  
 LAYOUT  
 SHEET #9**

PROJECT NAME: ST. JOHNSBURY-LYNDON  
 PROJECT NUMBER: STP 2928(I)  
 FILE NAME: p10c262.dgn  
 PROJECT LEADER: JLL  
 DESIGNED BY: MCF  
 IPARM FILE: p10c262109.i

PLOT DATE: 10/17/2013  
 DRAWN BY: STANTEC  
 CHECKED BY: JLL  
 SHEET 41 OF 133