

THINNING AND TRIMMING FOR SIGNS
 STA. 323+75, LT
 SEE DETAIL ON SHEET 31

MILLED RUMBLE STRIPS
 STA. 323+00 TO 326+50, ☐

STONE FILL, TYPE I
 STA. 324+27 TO 324+40, RT

STEEL BEAM GUARDRAIL, GALVANIZED
 STA. 323+00 TO 328+00, RT

REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. 323+00 TO 328+00, RT


DURABLE & TEMPORARY 4 INCH WHITE LINE
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADII FOR SIDE ROADS)
 STA. 323+00 TO 328+00, SOLID LT & RT

DURABLE & TEMPORARY 4 INCH YELLOW LINE
 (ALL LINES WILL INCLUDE ☐ BREAKS FOR SIDE ROADS)
 STA. 323+00 TO 328+00, SOLID LT & RT

GEOTEXTILE UNDER STONE FILL
 STA. 324+27 TO 324+40, RT

GRUBBING MATERIAL
 STA. 324+27 TO 324+40, RT

REMOVING SIGNS
 AS SHOWN - 1

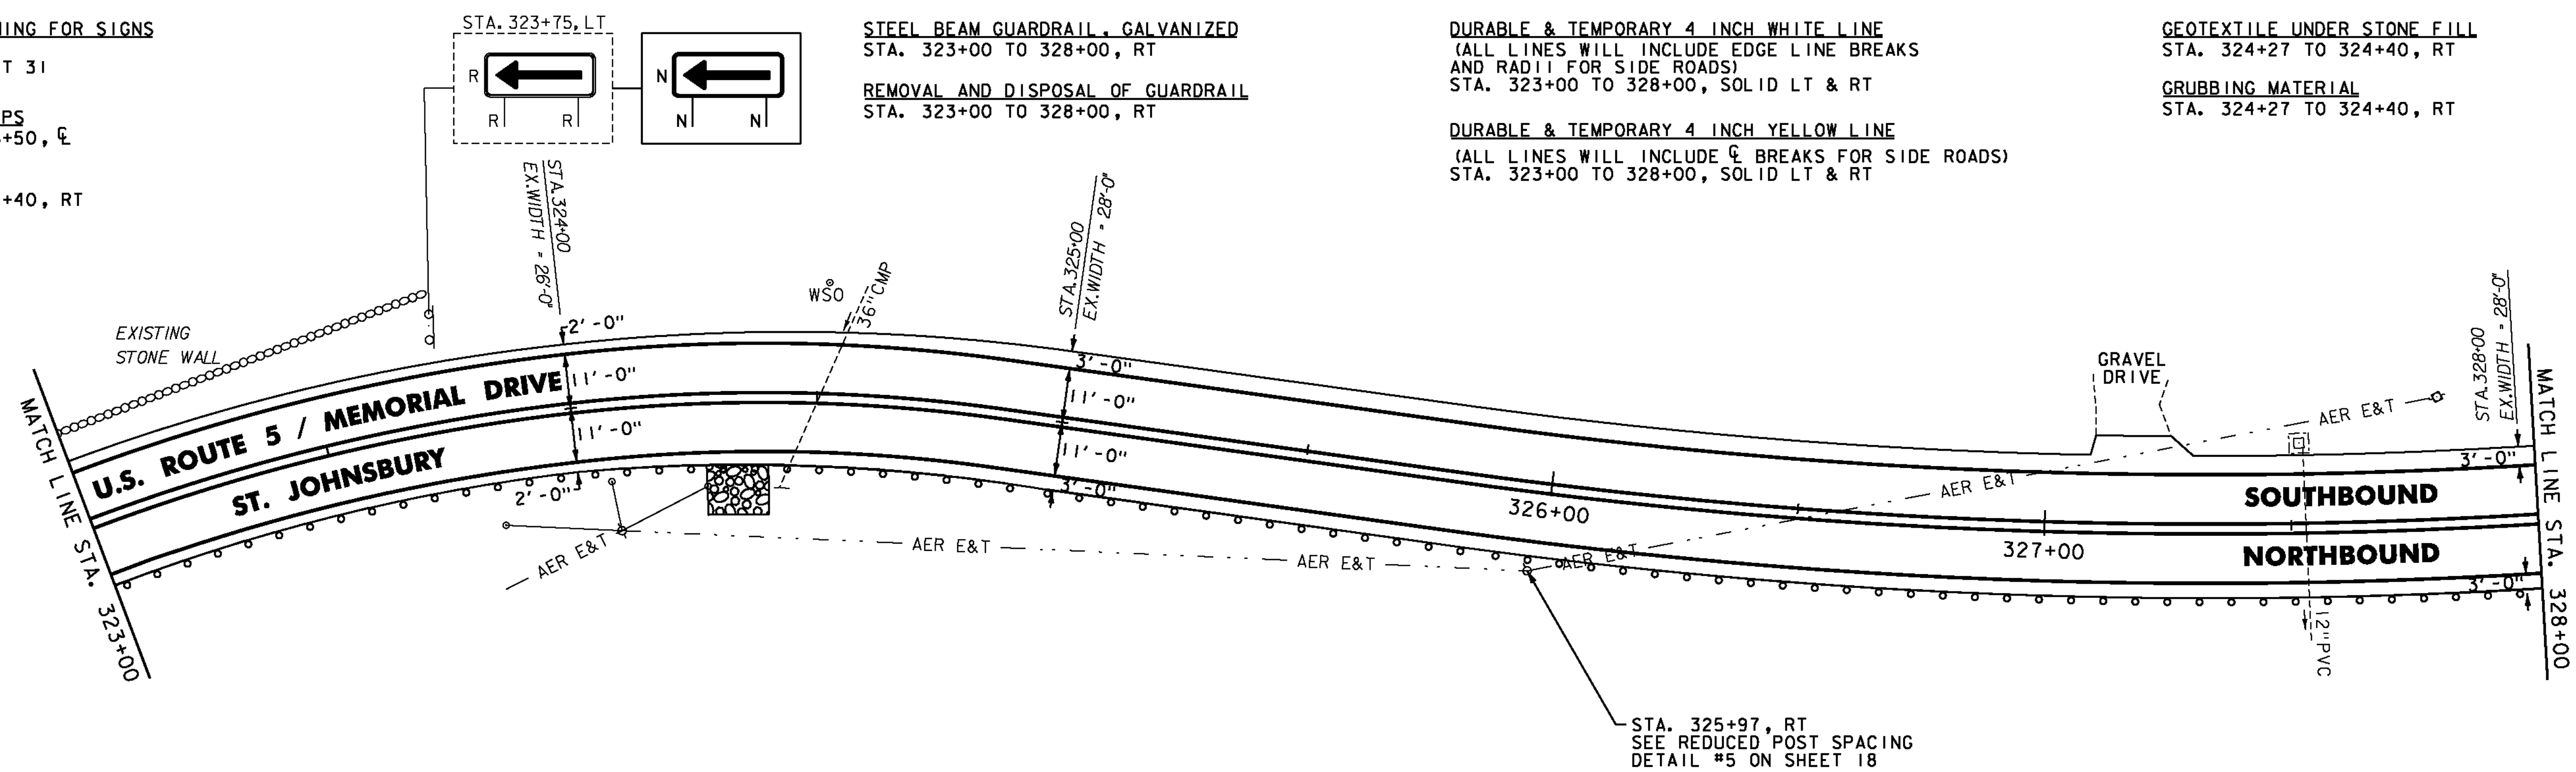

MILLED RUMBLE STRIPS
 STA. 328+50 TO 333+25, ☐
 (BREAK FOR SIDE ROADS PER DETAIL ON SHEET 27)

STONE FILL, TYPE I
 STA. 332+21 TO 332+36, RT

STEEL BEAM GUARDRAIL, GALVANIZED
 STA. 328+00 TO 329+56, RT
 STA. 330+20 TO 333+07.5, RT
 STA. 331+78 TO 332+78, LT
 (FOR DETAIL, SEE SHEET 17)

HD STEEL BEAM GUARDRAIL, GALVANIZED
 STA. 329+56 TO 329+73.5, RT
 STA. 330+01.5 TO 330+20, RT
 (FOR DETAIL, SEE SHEETS 20 & 21)

ANCHOR FOR STEEL BEAM RAIL
 STA. 331+78, LT
 STA. 332+78, LT
 STA. 333+07.5, RT

REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. 328+00 TO 329+73.5, RT
 STA. 330+01.5 TO 333+10, RT
 STA. 331+78 TO 332+78, LT

ADJUST ELEVATION OF VALVE BOX
 STA. 330+88, LT
 STA. 330+92, LT

DURABLE & TEMPORARY 4 INCH WHITE LINE
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADII FOR SIDE ROADS)
 STA. 328+00 TO 333+25, SOLID LT & RT
 STA. 330+00, SOLID RT (EDGELINES, PIERCE RD TH-15)

DURABLE & TEMPORARY 4 INCH YELLOW LINE
 (ALL LINES WILL INCLUDE ☐ BREAKS FOR SIDE ROADS)
 STA. 328+00 TO 333+25, SOLID LT & RT
 STA. 330+00, DOUBLE SOLID RT (PIERCE RD TH-15)

DURABLE & TEMPORARY 24 INCH STOP BAR
 STA. 330+00, RT (PIERCE ROAD TH-15)


DURABLE & TEMPORARY LETTER OR SYMBOL
 STA. 330+00, RT (PIERCE ROAD TH-15) "STOP"

GEOTEXTILE UNDER STONE FILL
 STA. 332+21 TO 332+36, RT

GRUBBING MATERIAL
 STA. 332+21 TO 332+36, RT

REMOVING SIGNS
 AS SHOWN - 10

ERECTING SALVAGED SIGNS
 AS SHOWN - 2

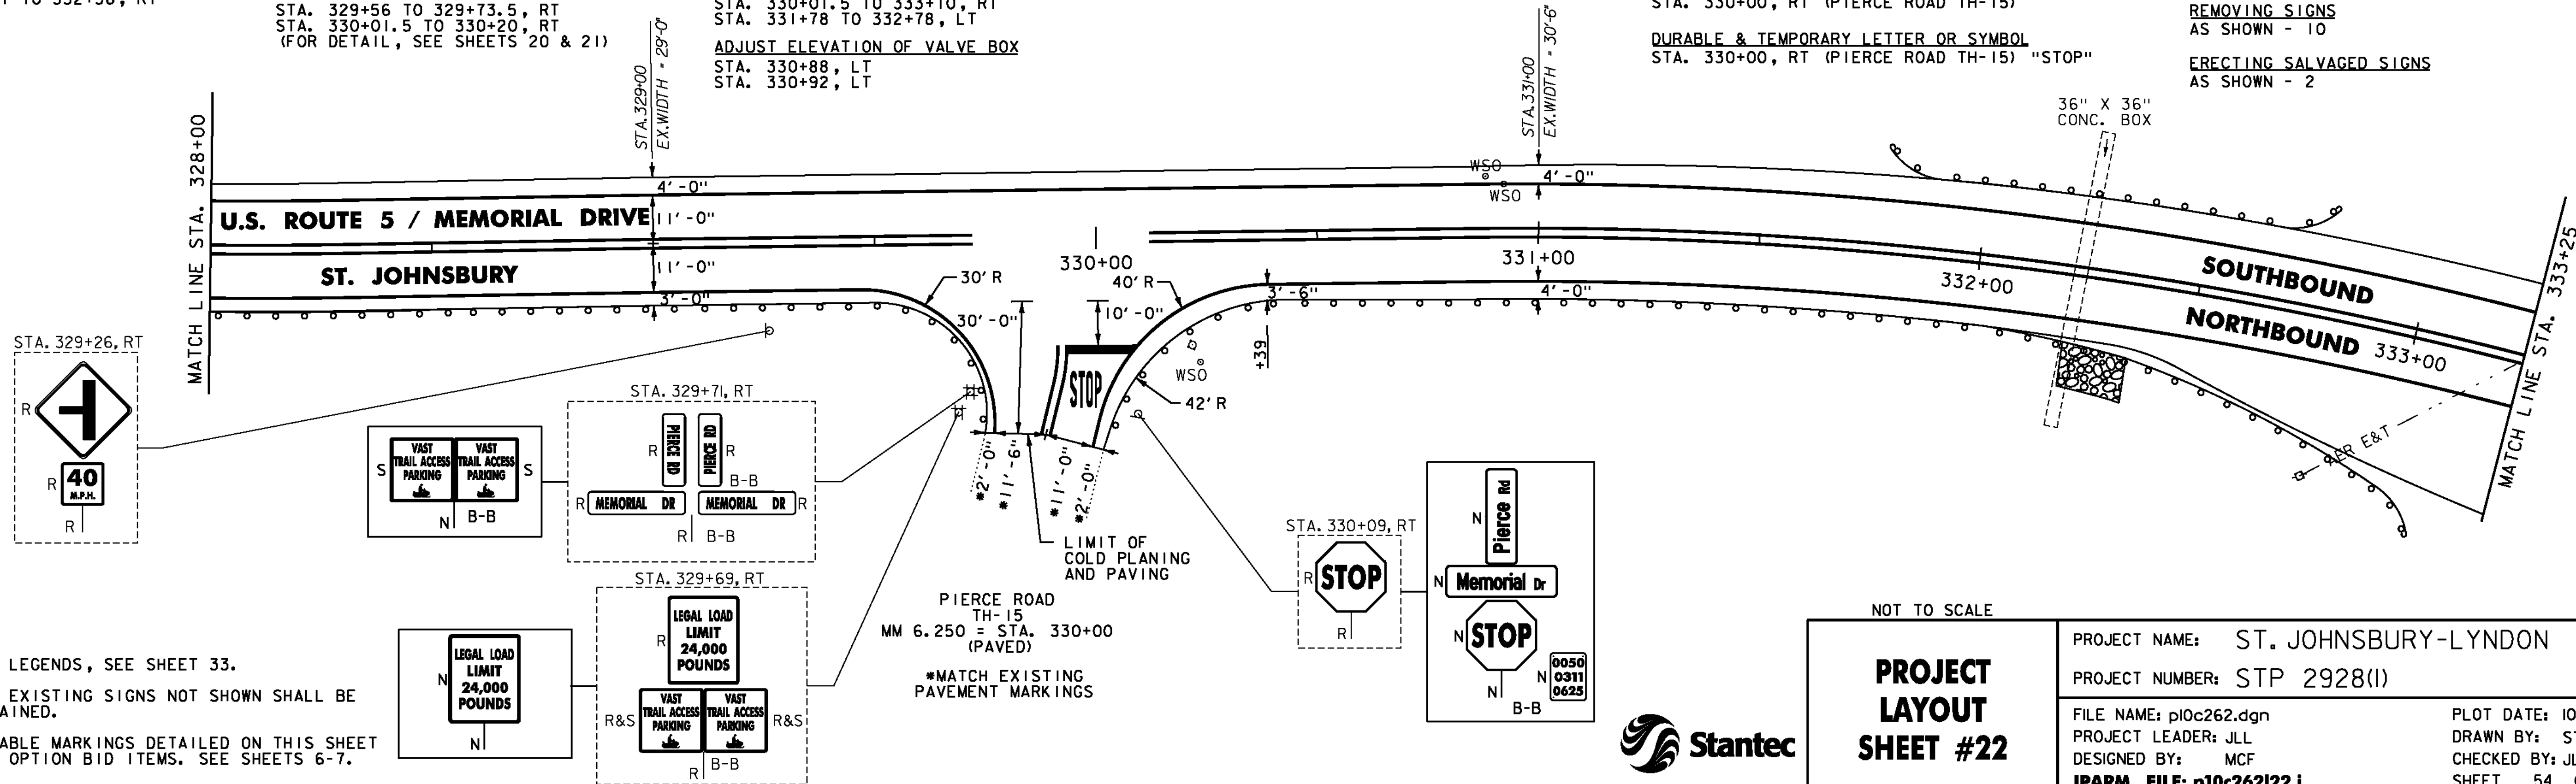

NOTES:

- FOR LEGENDS, SEE SHEET 33.
- ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.
- DURABLE MARKINGS DETAILED ON THIS SHEET ARE OPTION BID ITEMS. SEE SHEETS 6-7.

NOT TO SCALE

PROJECT LAYOUT SHEET #22

PROJECT NAME: ST. JOHNSBURY-LYNDON

PROJECT NUMBER: STP 2928(I)

FILE NAME: p10c262.dgn

PROJECT LEADER: JLL

DESIGNED BY: MCF

IPARM FILE: p10c262122.i

PLOT DATE: 10/17/2013

DRAWN BY: STANTEC

CHECKED BY: JLL

SHEET 54 OF 133

