

STEEL BEAM GUARDRAIL, GALVANIZED
STA. 45+31.5 TO 48+61.0, LT


REMOVAL AND DISPOSAL OF GUARDRAIL
STA. 45+29.0 TO 48+64.0, LT

DURABLE & TEMPORARY 4 INCH WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS
AND RADII FOR SIDE ROADS)
STA. 45+00 TO 50+00, SOLID LT & RT

DURABLE & TEMPORARY 4 INCH YELLOW LINE
(ALL LINES WILL INCLUDE & BREAKS FOR SIDE ROADS)
STA. 45+00 TO 50+00, SOLID LT & RT

REMOVING SIGNS
AS SHOWN - 2

ANCHOR FOR STEEL BEAM RAIL
STA. 45+31.5, LT
STA. 48+61.0, LT

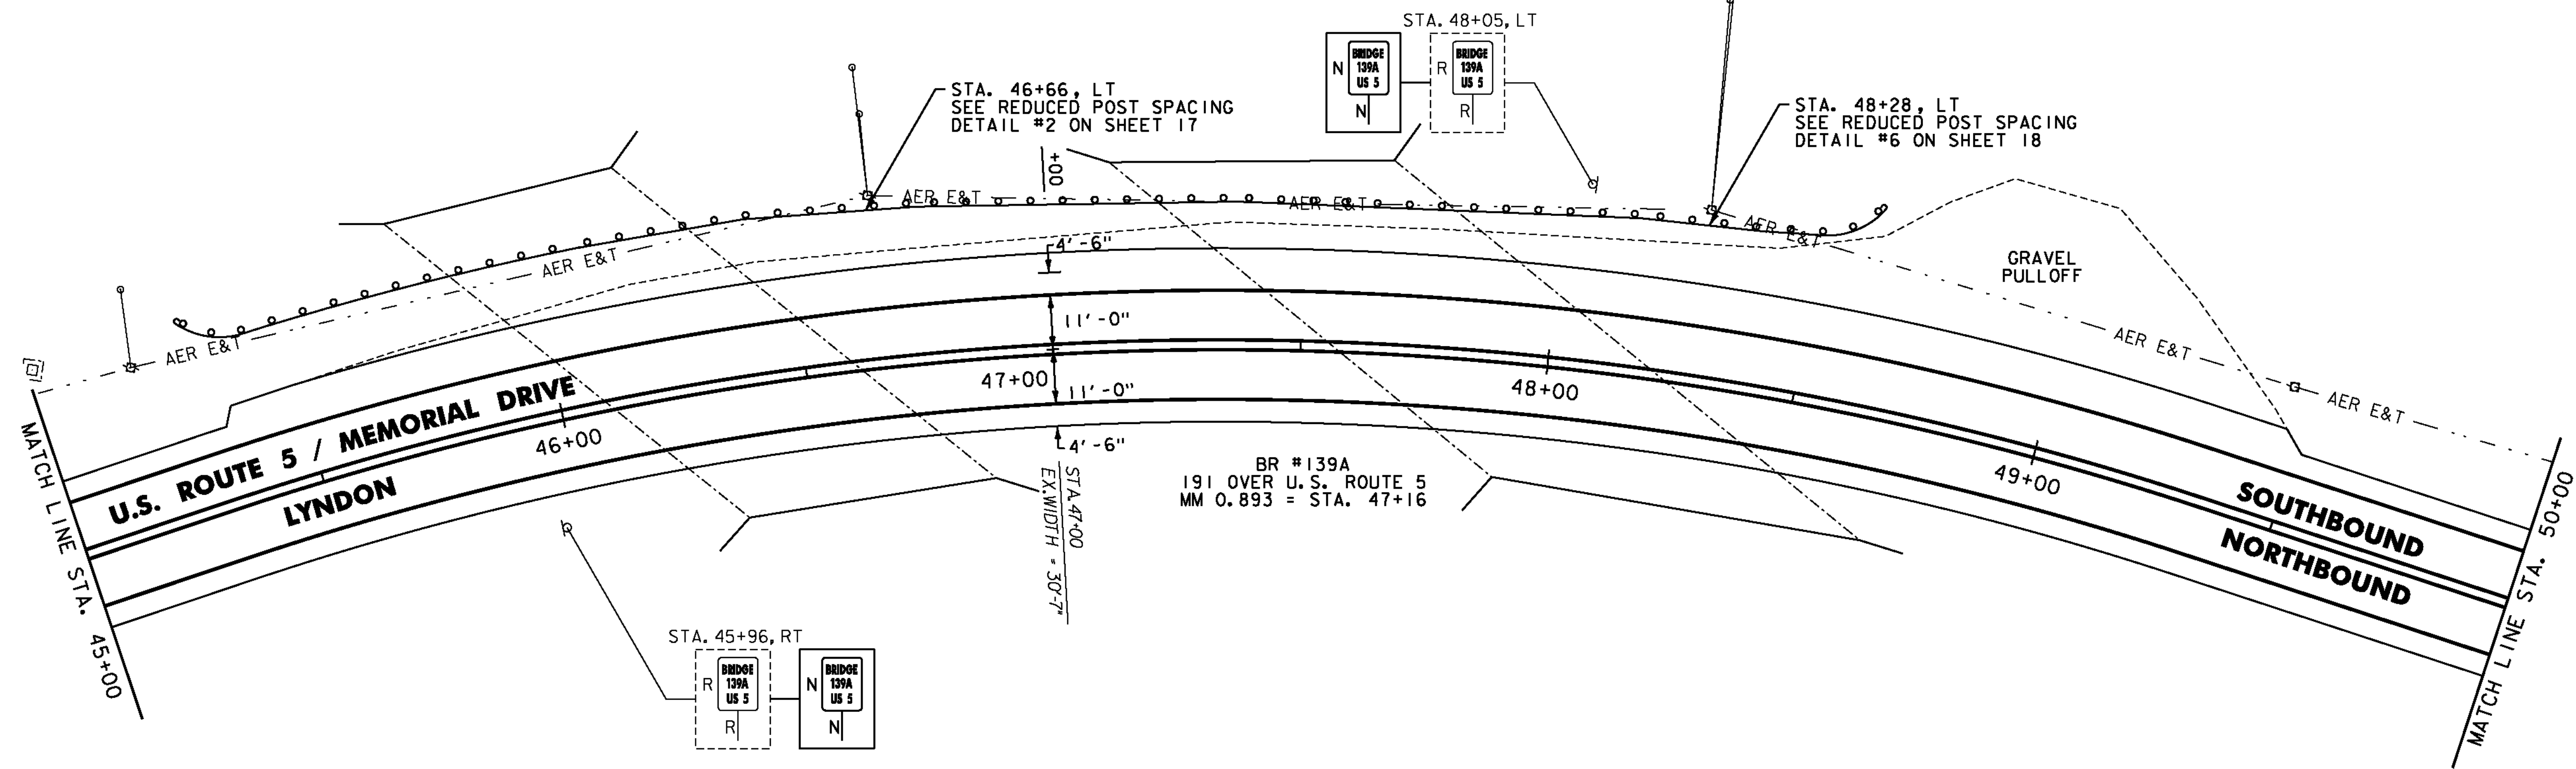


DURABLE & TEMPORARY 4 INCH WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS
AND RADII FOR SIDE ROADS)
STA. 50+00 TO 55+00, SOLID LT & RT

DURABLE & TEMPORARY 4 INCH YELLOW LINE
(ALL LINES WILL INCLUDE & BREAKS FOR SIDE ROADS)
STA. 50+00 TO 55+00, SOLID LT & RT

DURABLE & TEMPORARY 8 INCH WHITE LINE
STA. 54+10 TO 54+22, RT (HYDRANT)
SEE SHEET 29

REMOVING SIGNS
AS SHOWN - 3

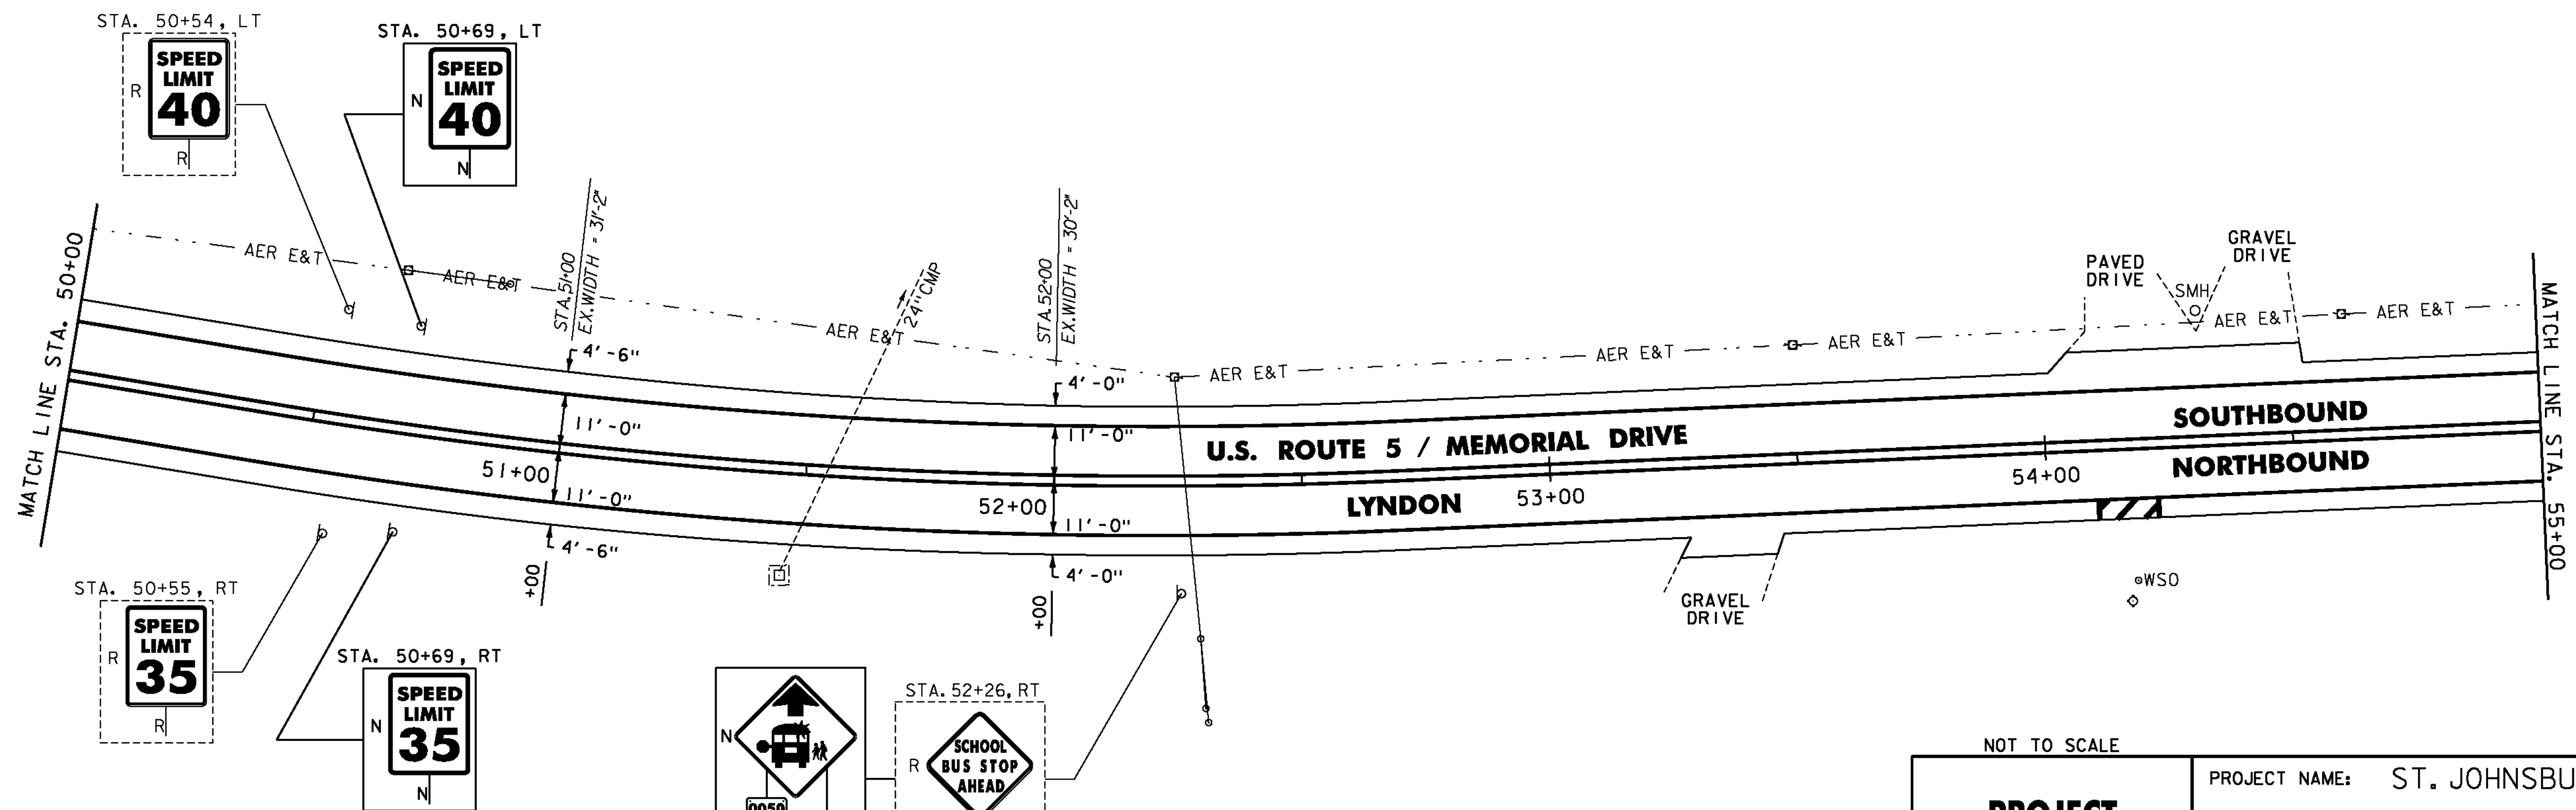

- NOTES:
- FOR LEGENDS, SEE SHEET 33.
 - ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.
 - DURABLE MARKINGS DETAILED ON THIS SHEET ARE OPTION BID ITEMS. SEE SHEETS 6-7.



NOT TO SCALE

PROJECT LAYOUT SHEET #35	PROJECT NAME: ST. JOHNSBURY-LYNDON	PLOT DATE: 10/17/2013
	PROJECT NUMBER: STP 2928(I)	DRAWN BY: STANTEC
	FILE NAME: p10c262.dgn	CHECKED BY: JLL
	PROJECT LEADER: JLL	SHEET 67 OF 133
	DESIGNED BY: MCF	
	IPARM FILE: p10c262i35.i	