

TEMPORARY 4 INCH WHITE LINE, PAINT  
 DURABLE 4 INCH WHITE LINE (OPTION ITEM)  
 216+50 TO 222+50 SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT  
 DURABLE 4 INCH YELLOW LINE, EPOXY PAINT OR  
 DURABLE 4 INCH YELLOW LINE, POLYUREA (OPTION ITEM)  
 216+50 TO 222+50 SOLID LT & RT

STEEL BEAM GUARDRAIL, GALVANIZED  
 217+68.5 TO 218+43.5 RT  
 218+90 TO 219+90 LT  
 219+98 LT (12.5')  
 220+78.5 TO 221+66 LT  
 221+74 LT (12.5')  
 222+43.5 TO 222+50 RT

ANCHOR FOR STEEL BEAM RAIL  
 3 (SEE STANDARD G-1d)

REMOVAL AND DISPOSAL OF GUARDRAIL  
 218+06 TO 218+43.5 RT  
 218+90 TO 219+96 LT  
 220+78.5 TO 221+72 LT  
 222+43.5 TO 222+50 RT


DELINEATOR WITH STEEL POST  
 217+68.5 RT  
 218+90 LT  
 219+90 LT  
 220+78.5 LT  
 221+66 LT

SPECIAL PROVISION (STEEL BEAM  
 GUARDRAIL GALVANIZED) (8 FEET RADIUS)  
 219+90 LT  
 221+66 LT

REMOVE AND RESET GUARDRAIL  
 218+43.5 TO 222+43.5 RT

MILLED RUMBLE STRIPS  
 216+50 TO 222+50 CL

REMOVING SIGNS  
 AS SHOWN - 1

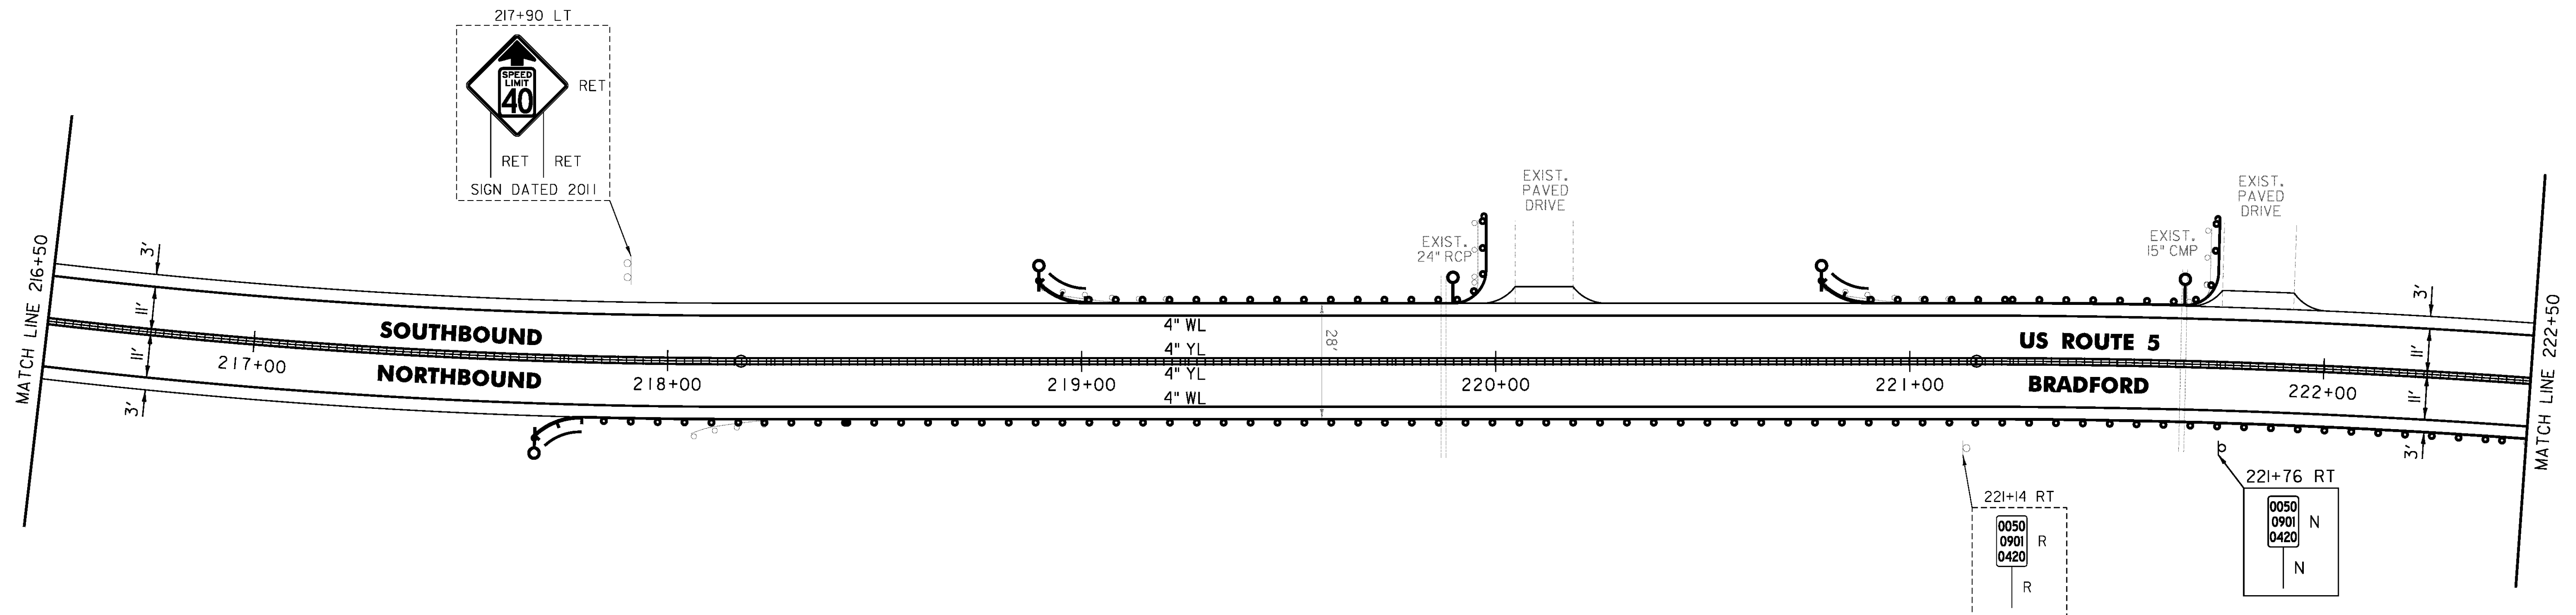

CLD 14-0278

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE	PLOT DATE: 2/4/2016
PROJECT NUMBER: STP 2929(I)	DRAWN BY: W. GORDON
FILE NAME: z10c264bdr.dgn	CHECKED BY: P. SHEDD
PROJECT LEADER: P. SHEDD	SHEET 82 OF 239
DESIGNED BY: N. LEMAY	
US 5 PLAN SHEET 24	