

TEMPORARY 4 INCH WHITE LINE, PAINT
 DURABLE 4 INCH WHITE LINE (OPTION ITEM)
 240+50 TO 246+50 SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT
 DURABLE 4 INCH YELLOW LINE, EPOXY PAINT OR
 DURABLE 4 INCH YELLOW LINE, POLYUREA (OPTION ITEM)
 240+50 TO 246+00 DASHED LT, SOLID RT
 246+00 TO 246+50 SOLID LT & RT

STEEL BEAM GUARDRAIL, GALVANIZED
 241+64.5 TO 242+02 LT
 242+19.5 TO 242+57 RT
 245+77.5 TO 246+15 RT
 246+27.5 TO 246+50 LT

ANCHOR FOR STEEL BEAM RAIL
 4 (SEE STANDARD G-1d)


REMOVAL AND DISPOSAL OF GUARDRAIL
 241+64.5 TO 242+02 LT
 242+19.5 TO 242+57 RT
 245+79 TO 246+16.5 RT
 246+28 TO 246+50 LT

DELINEATOR WITH STEEL POST
 242+02 LT
 242+57 RT
 245+77.5 RT
 246+27.5 LT

REMOVE AND RESET GUARDRAIL
 240+50 TO 242+19.5 RT
 246+16.5 TO 246+50 RT

MILLED RUMBLE STRIPS
 240+50 TO 246+50 CL

REMOVING SIGNS
 AS SHOWN - 1

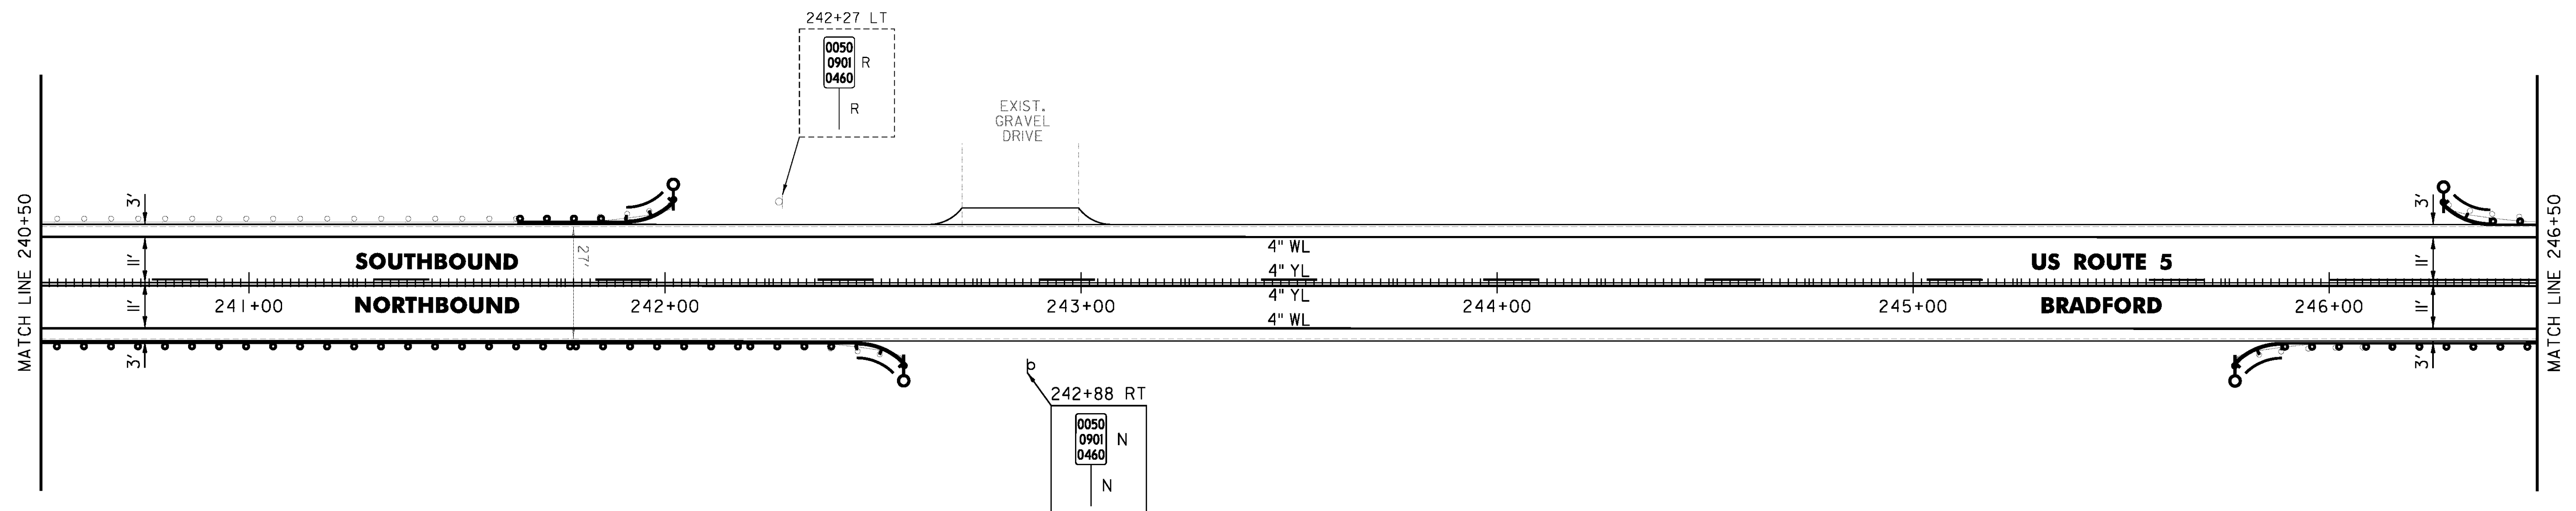

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE	PLOT DATE: 2/4/2016
PROJECT NUMBER: STP 2929(I)	DRAWN BY: W. GORDON
FILE NAME: z10c264bdr.dgn	CHECKED BY: P. SHEDD
PROJECT LEADER: P. SHEDD	SHEET 86 OF 239
DESIGNED BY: N. LEMAY	
US 5 PLAN SHEET 28	