

TEMPORARY 4 INCH WHITE LINE, PAINT
 DURABLE 4 INCH WHITE LINE (OPTION ITEM)
 305+50 TO N 2+50 SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT
 DURABLE 4 INCH YELLOW LINE, EPOXY PAINT OR
 DURABLE 4 INCH YELLOW LINE, POLYUREA (OPTION ITEM)
 305+50 TO 308+30 SOLID LT & RT
 308+30 TO N 2+50 DASHED LT, SOLID RT

STEEL BEAM GUARDRAIL, GALVANIZED
 307+72.5 TO 308+10 LT
 N 0+24 TO N 0+61.5 RT
 N 0+93.5 TO N 1+31 RT

ANCHOR FOR STEEL BEAM RAIL
 3' (SEE STANDARD G-1d)


REMOVAL AND DISPOSAL OF GUARDRAIL
 307+72.5 TO 308+10 LT
 N 0+24 TO N 0+62 RT
 N 0+93.5 TO N 1+31 RT

DELINEATOR WITH STEEL POST
 307+72.5 LT
 N 0+61.5 RT
 N 0+93.5 RT

REMOVE AND RESET GUARDRAIL
 305+50 TO N 0+24 RT
 308+10 TO N 2+50 LT
 N 1+31 TO N 2+50 RT

MILLED RUMBLE STRIPS
 305+50 TO N 2+50 CL

REMOVING SIGNS
 AS SHOWN - 2

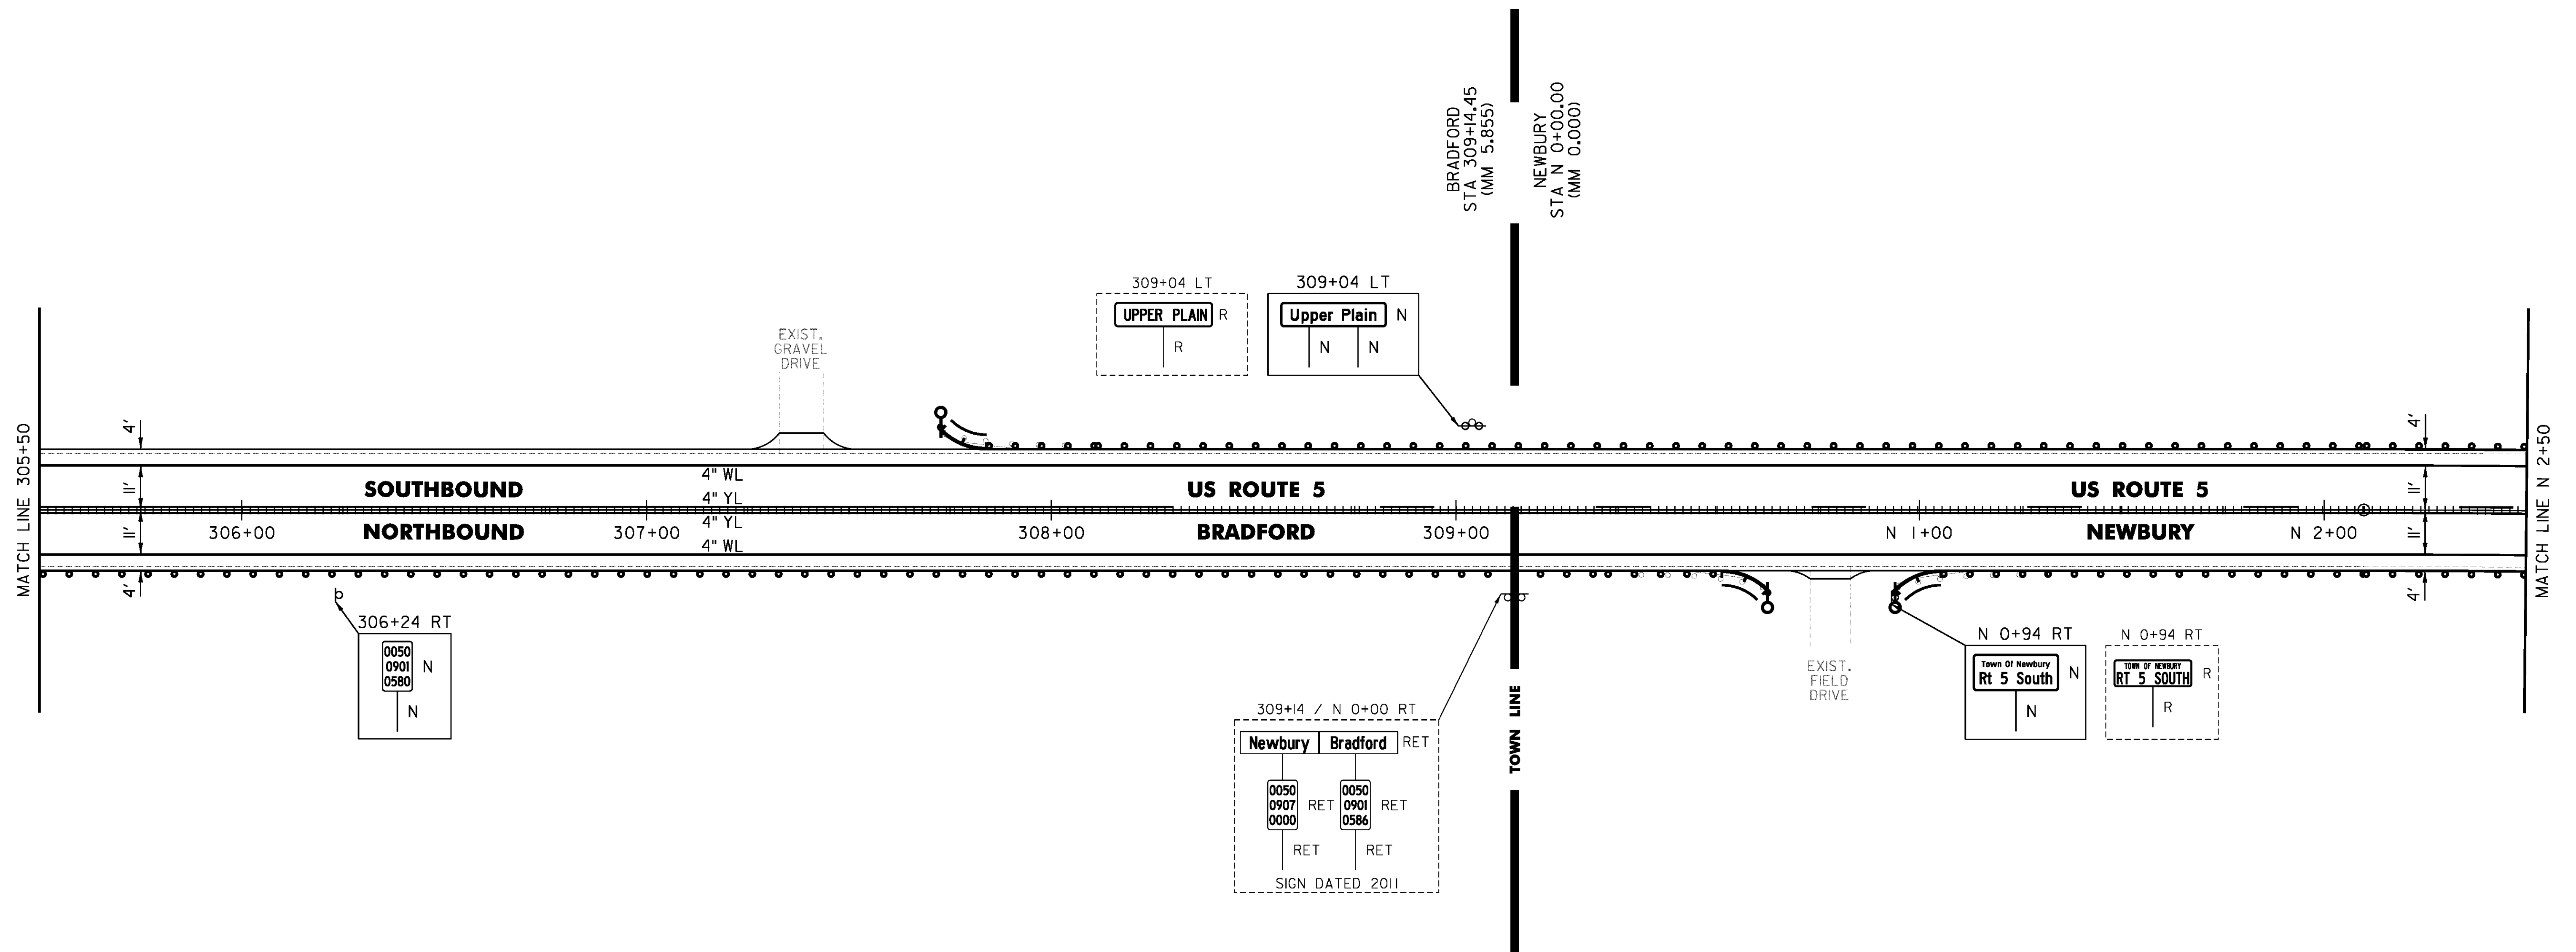

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE	
PROJECT NUMBER: STP 2929(I)	
FILE NAME: z10c264bdr.dgn	PLOT DATE: 2/4/2016
PROJECT LEADER: P. SHEDD	DRAWN BY: W. GORDON
DESIGNED BY: N. LEMAY	CHECKED BY: P. SHEDD
US 5 PLAN SHEET 39	SHEET 97 OF 239