

TEMPORARY 4 INCH WHITE LINE, PAINT  
 DURABLE 4 INCH WHITE LINE (OPTION ITEM)  
 N 206+50 TO N 210+03 SOLID LT  
 N 206+50 TO N 212+50 SOLID RT  
 N 210+03 TO N 210+42 SOLID LT (TH 76)  
 N 210+64 TO N 211+00 SOLID LT (TH 76)  
 N 211+00 TO N 212+50 SOLID LT  
 N 211+11 SOLID LT (NO PARKING)  
 N 211+23 SOLID LT (NO PARKING)

TEMPORARY 4 INCH YELLOW LINE, PAINT  
 DURABLE 4 INCH YELLOW LINE (OPTION ITEM)  
 N 206+50 TO N 210+31 SOLID LT & RT  
 N 210+53 DOUBLE SOLID LT (TH 76)  
 N 210+71 TO N 212+50 SOLID LT & RT

TEMPORARY 8 INCH WHITE LINE, PAINT  
 DURABLE 8 INCH WHITE LINE (OPTION ITEM)  
 N 211+11 TO N 211+23 SOLID LT (NO PARKING)

TEMPORARY 24 INCH STOP BAR, PAINT  
 DURABLE 24 INCH STOP BAR (OPTION ITEM)  
 N 210+25 TO N 210+52 LT (TH 76)

TEMPORARY LETTER OR SYMBOL, PAINT  
 DURABLE LETTER OR SYMBOL (OPTION ITEM)  
 N 210+40 LT \*STOP\* (TH 76)

REHAB. DROP INLETS, CATCH BASINS,  
 OR MANHOLES, CLASS I, CLASS II

N 207+30 LT  
 N 207+30 RT  
 N 209+51 RT  
 N 209+68 LT

TREATED TIMBER CURB  
 N 209+62 TO N 210+30 LT

STEEL BEAM GUARDRAIL, GALVANIZED  
 N 209+41 TO N 211+03.5 RT


REMOVE AND RESET GUARDRAIL  
 N 209+62 TO N 210+30 LT

ANCHOR FOR STEEL BEAM RAIL  
 1' (SEE STANDARD G-1d)

REMOVAL AND DISPOSAL OF GUARDRAIL  
 N 209+41 TO N 211+03.5 RT

DELINEATOR WITH STEEL POST  
 N 211+03.5 RT

REMOVING SIGNS  
 AS SHOWN - 9

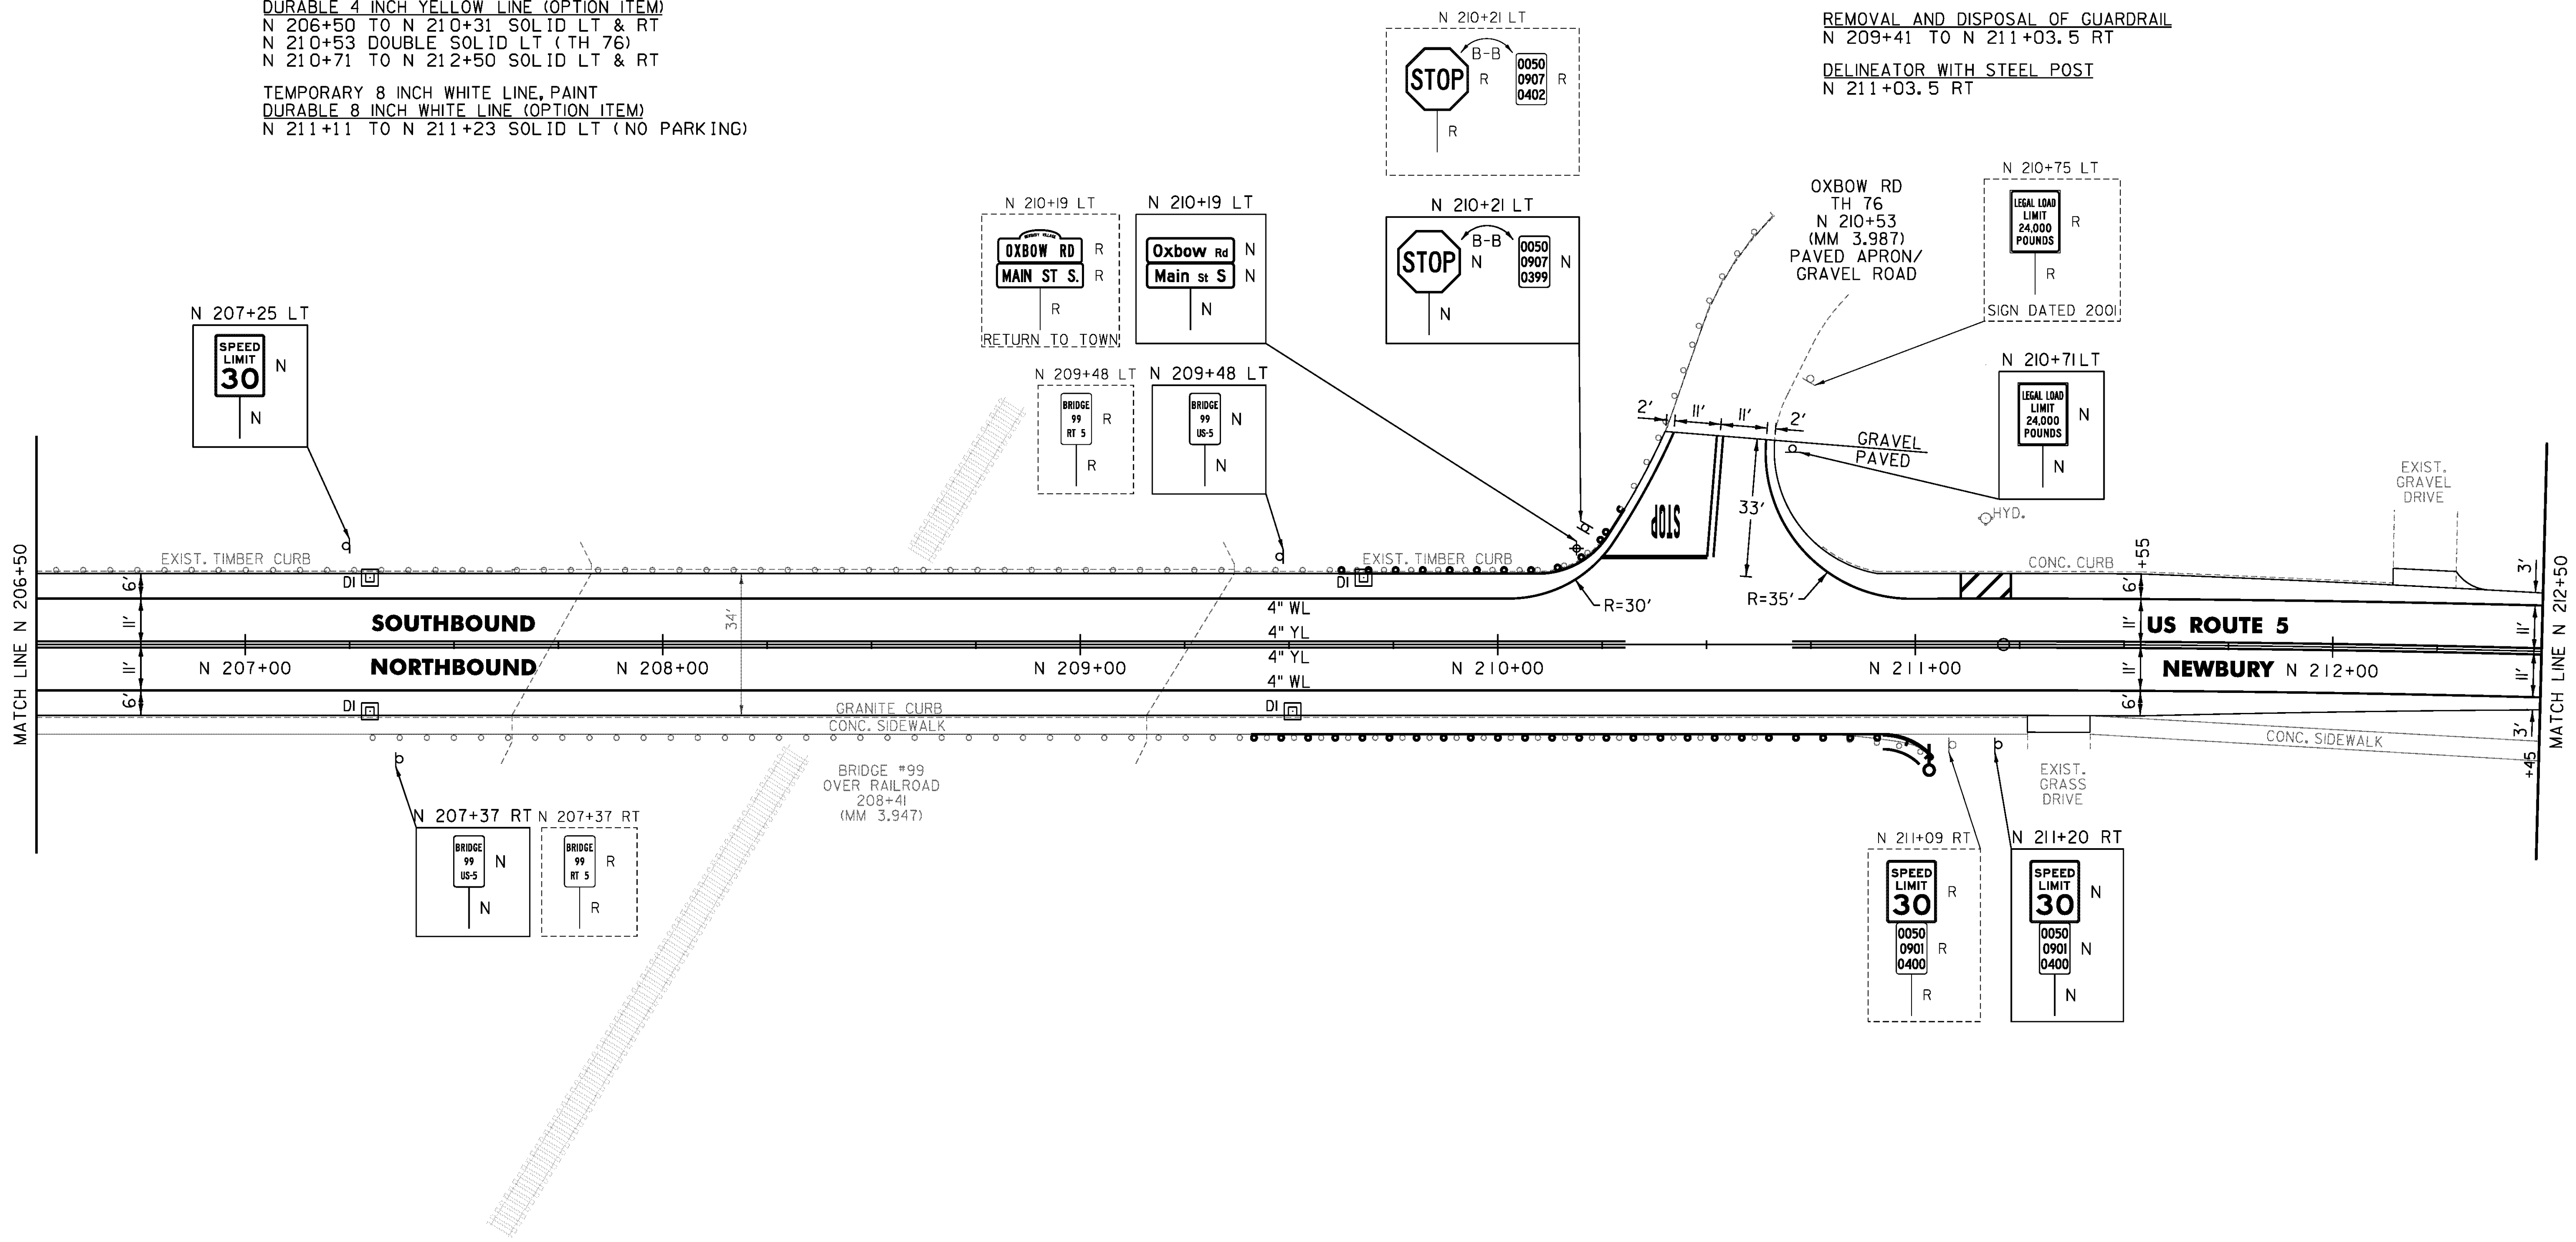

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE	PLOT DATE: 2/4/2016
PROJECT NUMBER: STP 2929(I)	DRAWN BY: W. GORDON
FILE NAME: z10c264bdr.dgn	CHECKED BY: P. SHEDD
PROJECT LEADER: P. SHEDD	SHEET 133 OF 239
DESIGNED BY: N. LEMAY	
US 5 PLAN SHEET 75	