

TEMPORARY 4 INCH WHITE LINE, PAINT  
DURABLE 4 INCH WHITE LINE (OPTION ITEM)  
N 319+50 TO N 325+50 SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT  
N 319+50 TO N 325+50 SOLID LT & RT

DURABLE 4 INCH YELLOW LINE (OPTION ITEM)  
N 320+00 TO N 322+00 SOLID LT & RT


DURABLE 4 INCH YELLOW LINE, EPOXY PAINT OR  
DURABLE 4 INCH YELLOW LINE, POLYUREA (OPTION ITEM)  
N 319+50 TO N 320+00 SOLID LT & RT  
N 322+00 TO N 325+50 SOLID LT & RT

REMOVE AND RESET GUARDRAIL  
N 319+50 TO N 325+50 RT

MILLED RUMBLE STRIPS  
N 319+50 TO N 320+00 CL  
N 322+00 TO N 325+50 CL

GRUBBING MATERIAL (6")  
STONE FILL, TYPE J  
N 323+20 TO N 323+90 RT

REMOVAL OF EXISTING DELINEATOR  
AS SHOWN - 5

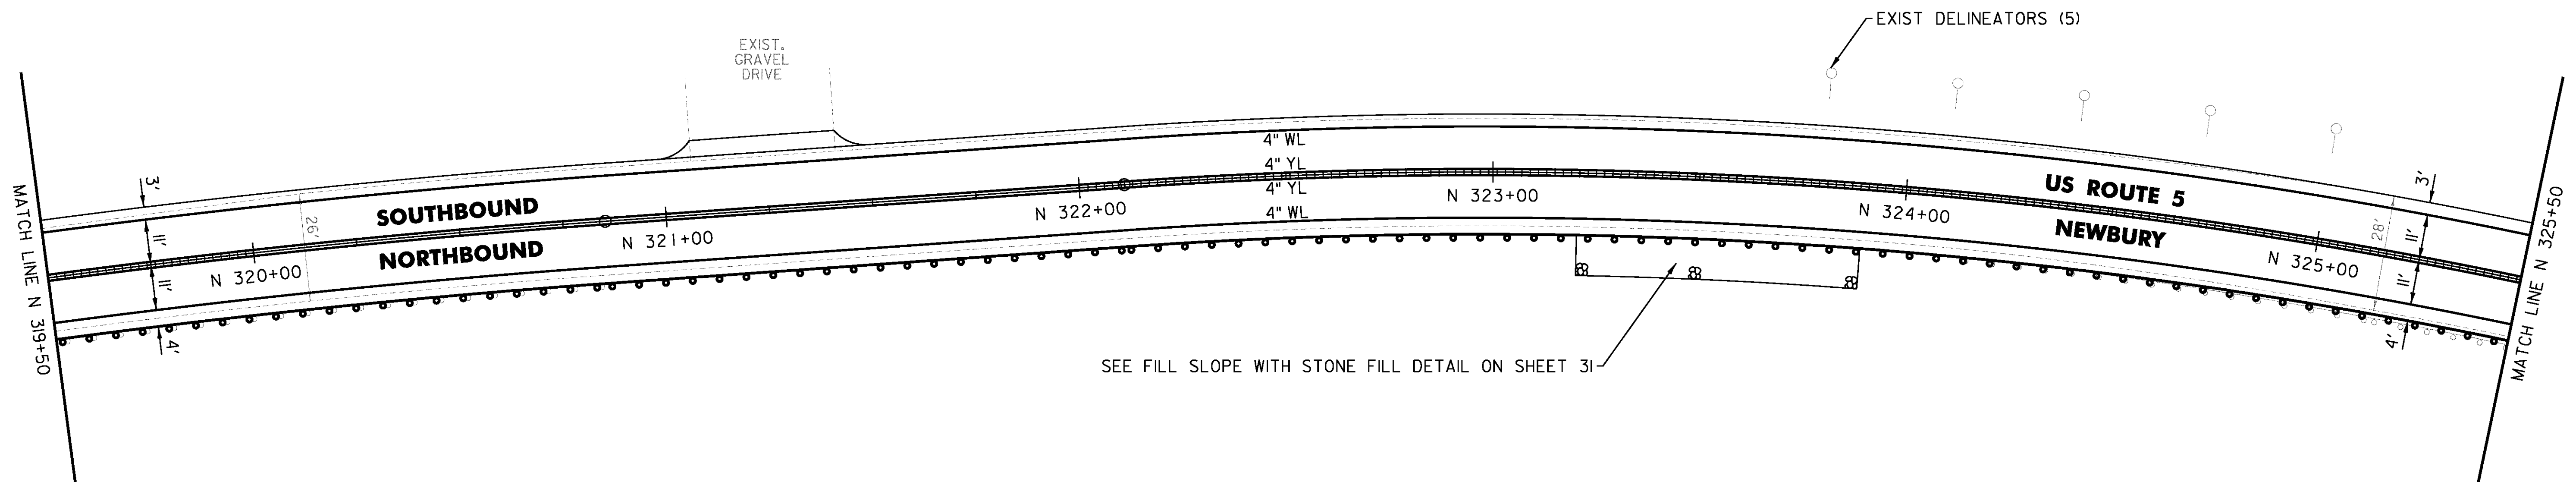

SEE FILL SLOPE WITH STONE FILL DETAIL ON SHEET 31

CLD 14-0278

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE	PLOT DATE: 2/4/2016
PROJECT NUMBER: STP 2929(I)	DRAWN BY: W. GORDON
FILE NAME: z10c264bdr.dgn	CHECKED BY: P. SHEDD
PROJECT LEADER: P. SHEDD	SHEET 152 OF 239
DESIGNED BY: N. LEMAY	
US 5 PLAN SHEET 94	