

TEMPORARY 4 INCH WHITE LINE, PAINT
 DURABLE 4 INCH WHITE LINE (OPTION ITEM)

N 479+50 TO N 481+17 SOLID LT
 N 479+50 TO N 485+50 SOLID RT
 N 481+17 TO N 481+30 SOLID LT (TH 414)
 N 481+25 TO N 481+33 SOLID LT (TH 414)
 N 481+42 TO N 481+72 SOLID LT (TH 414)
 N 481+89 TO N 482+07 SOLID LT (TH 414)
 N 482+07 TO N 485+50 SOLID LT

TEMPORARY 4 INCH YELLOW LINE, PAINT
 DURABLE 4 INCH YELLOW LINE (OPTION ITEM)
 N 479+50 TO N 481+37 SOLID LT & RT
 N 481+33 TO N 481+51 DOUBLE SOLID LT (TH 414)
 N 481+77 TO N 485+50 SOLID LT & RT

TEMPORARY 24 INCH STOP BAR, PAINT
 DURABLE 24 INCH STOP BAR (OPTION ITEM)
 N 481+32 TO N 481+50 LT (TH 414)

TEMPORARY LETTER OR SYMBOL, PAINT
 DURABLE LETTER OR SYMBOL (OPTION ITEM)
 N 481+35 LT *STOP* (TH 414)

TEMPORARY CROSSWALK MARKING, PAINT
 DURABLE CROSSWALK MARKING (OPTION ITEM)
 N 481+26 TO N 481+84 LT


REHAB. DROP INLETS, CATCH BASINS,
 OR MANHOLES, CLASS I, CLASS II
 N 479+57 LT
 N 481+25 LT

REMOVING SIGNS
 AS SHOWN - 6

PORTLAND CEMENT
 CONCRETE SIDEWALK, 5 INCH
 N 481+18 TO N 481+25 LT (RAMP TYPE 1)
 N 481+84 TO N 481+94 LT (RAMP TYPE 1)

DETECTABLE WARNING SURFACE (DWS)
 N 481+22 LT
 N 481+93 LT

BITUMINOUS CONCRETE
 GUTTERS AND TRAFFIC ISLANDS
 N 479+52 TO N 480+49 LT
 N 480+63 TO N 481+23 LT

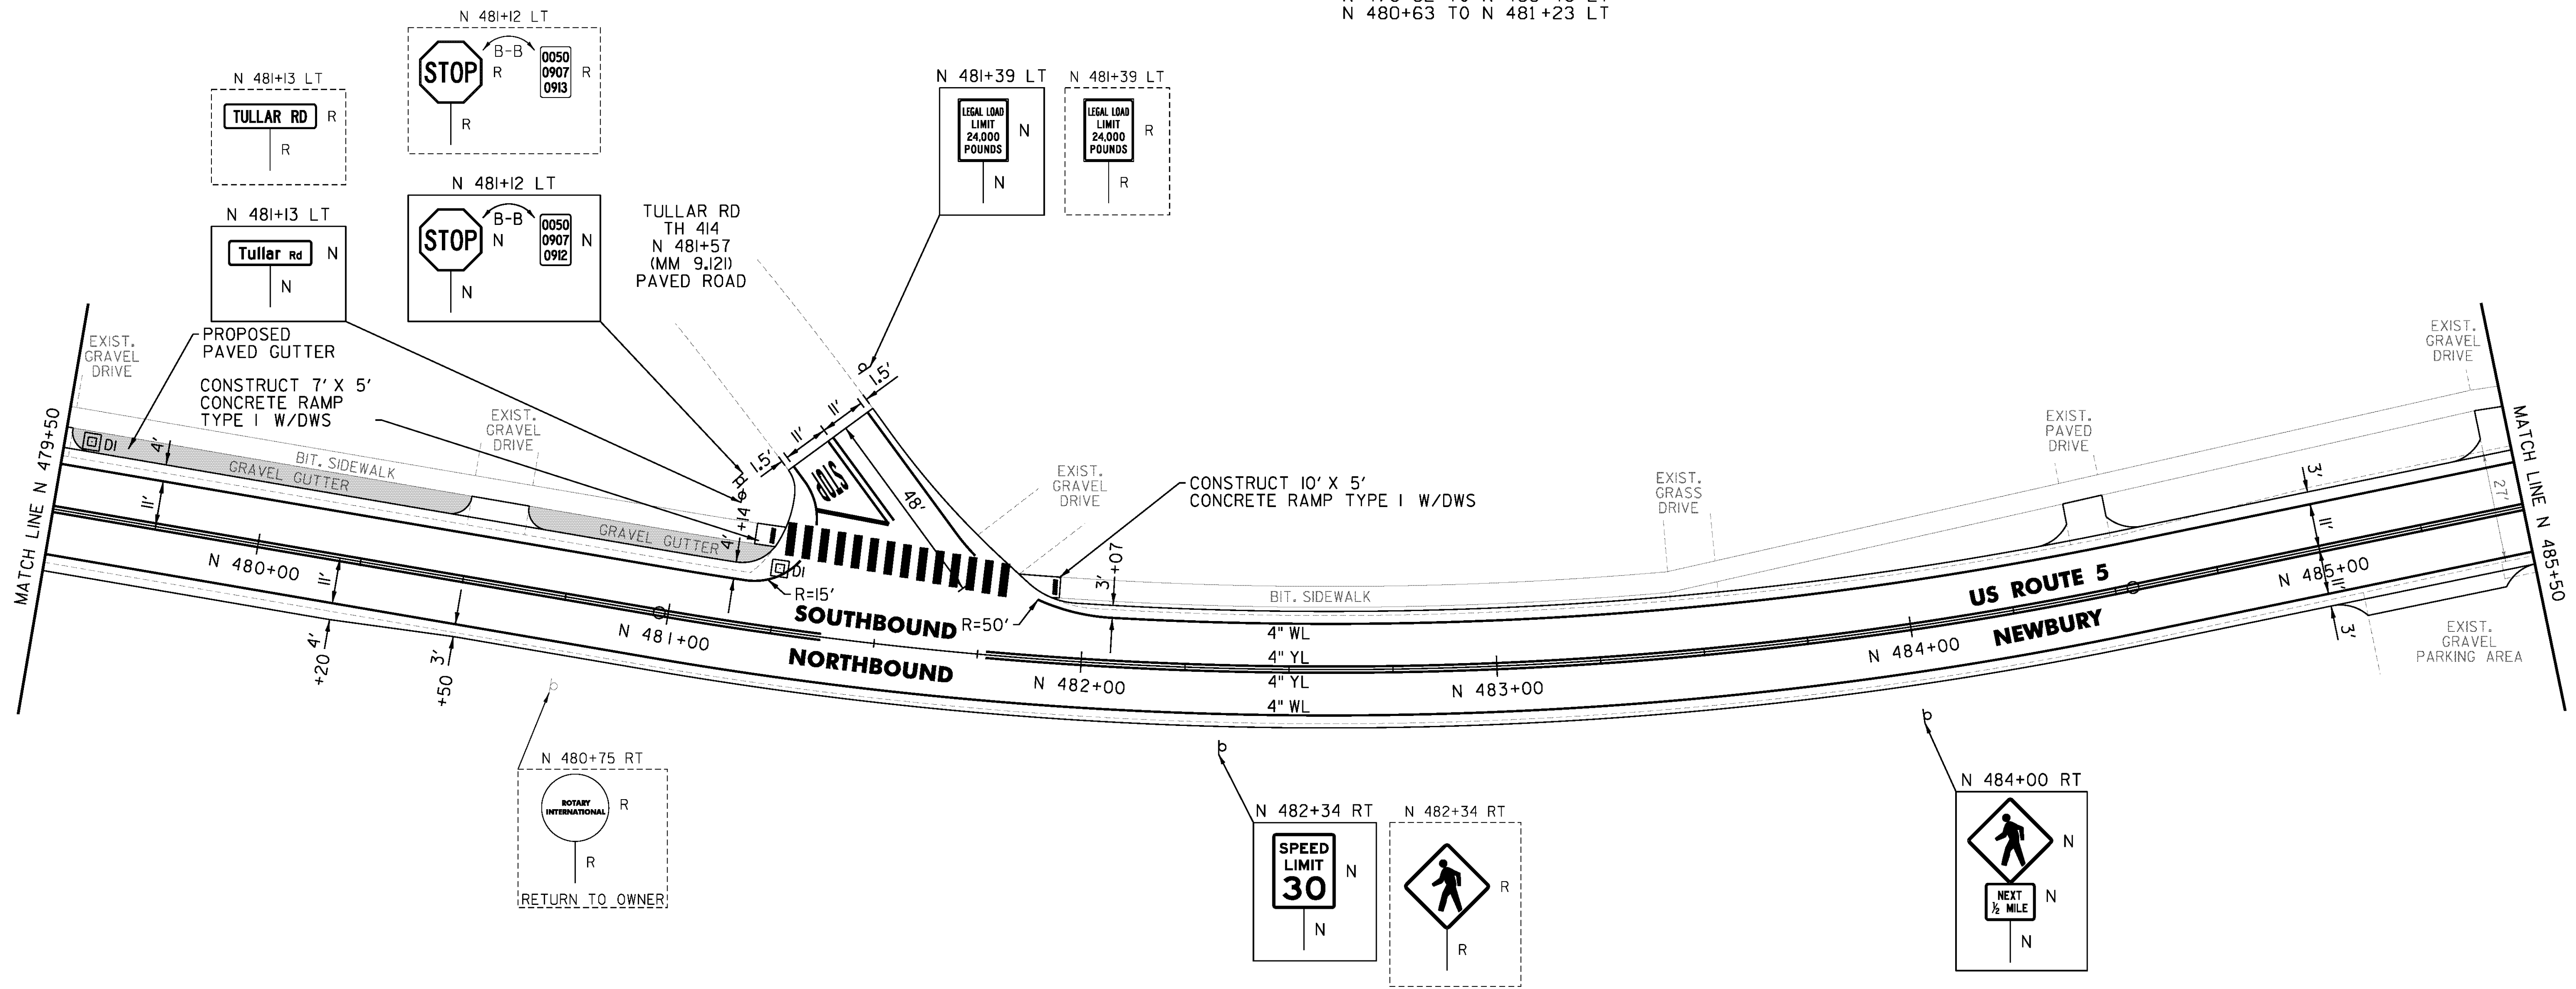

CLD 14-0278

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE	PLOT DATE: 2/4/2016
PROJECT NUMBER: STP 2929(I)	DRAWN BY: W. GORDON
FILE NAME: z10c264bdr.dgn	CHECKED BY: P. SHEDD
PROJECT LEADER: P. SHEDD	SHEET 179 OF 239
DESIGNED BY: N. LEMAY	
US 5 PLAN SHEET I2I	