

TEMPORARY 4 INCH WHITE LINE, PAINT  
 DURABLE 4 INCH WHITE LINE (OPTION ITEM)  
 R 32+50 TO R 38+50 SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT  
 R 32+50 TO R 38+50 SOLID LT & RT

DURABLE 4 INCH YELLOW LINE (OPTION ITEM)  
 R 37+25 TO R 38+50 SOLID LT & RT

DURABLE 4 INCH YELLOW LINE, EPOXY PAINT OR  
 DURABLE 4 INCH YELLOW LINE, POLYUREA (OPTION ITEM)  
 R 32+50 TO R 37+25 SOLID LT & RT

STEEL BEAM GUARDRAIL, GALVANIZED  
 R 32+90 TO R 38+15 LT  
 R 33+40 TO R 37+90 RT

ANCHOR FOR STEEL BEAM RAIL  
 4 (SEE STANDARD G-1d)


REMOVAL AND DISPOSAL OF GUARDRAIL  
 R 33+40 TO R 37+90 RT  
 R 33+43 TO R 37+89 LT

DELINEATOR WITH STEEL POST  
 R 33+40 RT  
 R 33+90 LT  
 R 37+12 RT  
 R 37+27 LT

1/2" CSP .064 (2-2/3 X 1/2)  
 R 32+86 TO R 33+86 LT  
 R 33+15 TO R 33+65 RT

MILLED RUMBLE STRIPS  
 R 32+50 TO R 37+25 CL

REMOVING SIGNS  
 AS SHOWN - 3

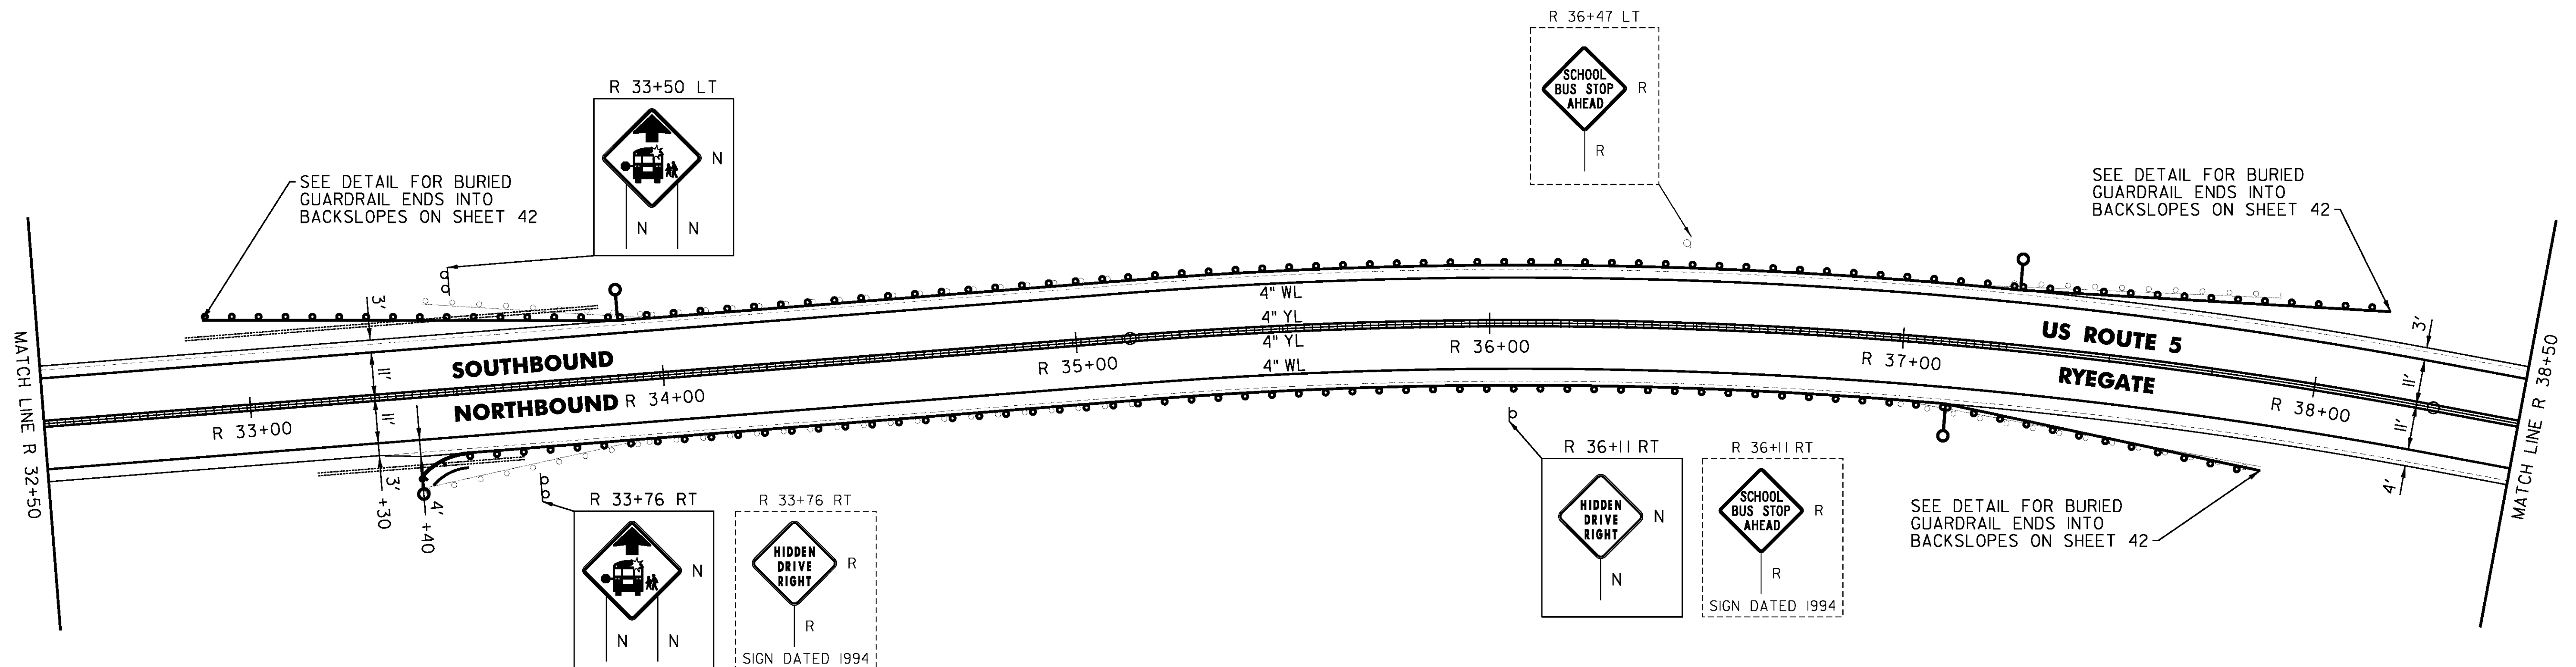

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE	PLOT DATE: 2/4/2016
PROJECT NUMBER: STP 2929(I)	DRAWN BY: W. GORDON
FILE NAME: z10c264bdr.dgn	CHECKED BY: P. SHEDD
DESIGNED BY: N. LEMAY	SHEET 191 OF 239
US 5 PLAN SHEET 133	