

TEMPORARY 4 INCH WHITE LINE, PAINT
 DURABLE 4 INCH WHITE LINE (OPTION ITEM)
 R 50+50 TO R 56+50 SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT
 DURABLE 4 INCH YELLOW LINE, EPOXY PAINT OR
 DURABLE 4 INCH YELLOW LINE, POLYUREA (OPTION ITEM)
 R 50+50 TO R 56+50 SOLID LT & RT

STEEL BEAM GUARDRAIL,
 GALVANIZED W/8 FEET POSTS
 R 50+50 TO R 50+80 LT
 R 50+50 TO R 51+42.5 RT

STEEL BEAM GUARDRAIL, GALVANIZED
 R 50+80 TO R 50+92.5 LT
 R 51+42.5 TO R 51+55 RT
 R 53+00 TO R 55+00 RT


ANCHOR FOR STEEL BEAM RAIL
 4 (SEE STANDARD G-1d)

REMOVAL AND DISPOSAL OF GUARDRAIL
 R 50+50 TO R 50+94 LT
 R 50+50 TO R 51+55 RT
 R 53+08 TO R 55+02 RT

DELINEATOR WITH STEEL POST
 R 50+92.5 LT
 R 51+55 RT
 R 53+00 RT
 R 55+00 RT

MILLED RUMBLE STRIPS
 R 50+50 TO R 56+50 CL

REMOVING SIGNS
 AS SHOWN - 2

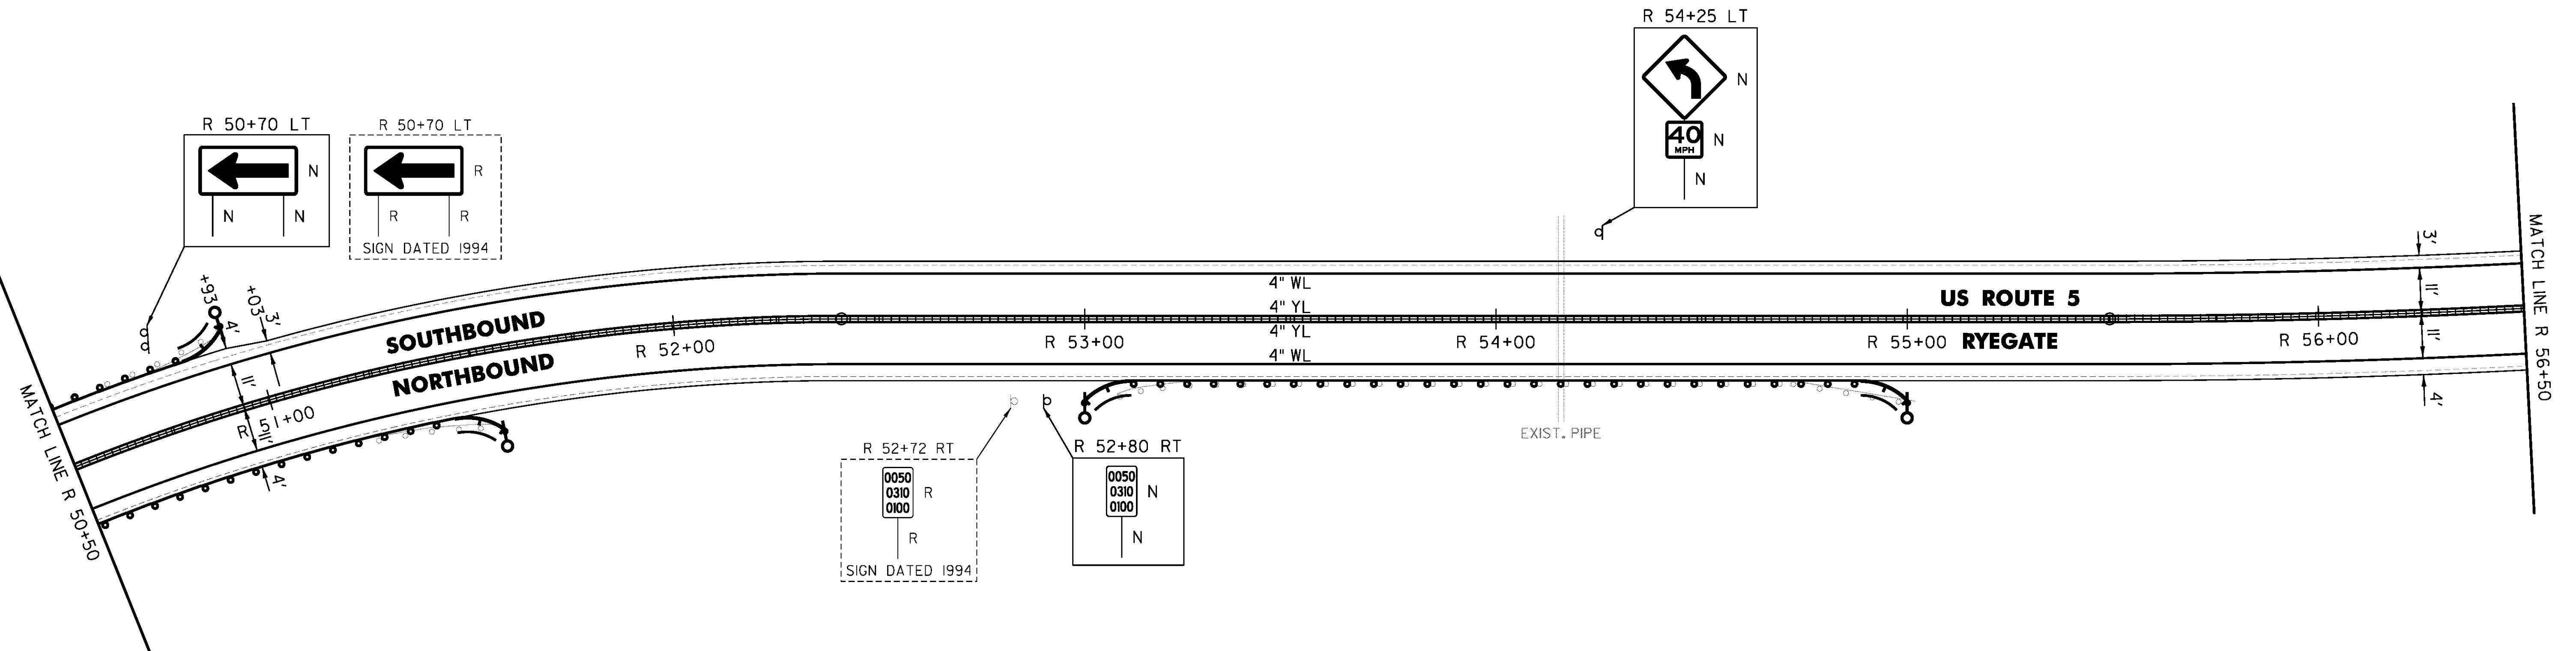

CLD 14-0278

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE	PLOT DATE: 2/4/2016
PROJECT NUMBER: STP 2929(I)	DRAWN BY: W. GORDON
FILE NAME: z10c264bdr.dgn	CHECKED BY: P. SHEDD
PROJECT LEADER: P. SHEDD	SHEET 194 OF 239
DESIGNED BY: N. LEMAY	
US 5 PLAN SHEET 136	