DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS "A"	NEW SIGNS "B"	EXISTING SIGNS RETAIN	EXISTING SIGNS SALVAGE FROM	EXISTING SIGNS SALVAGE TO	EXISTING SIGNS REMOVE	EXIST POST RETAIN	EXIST POST REMOVE	NUMBER OF NEW POSTS	SQUARE STEEL (IN) 1.75 (LB / FT) 1.88	SQUARE STEEL (IN) 2.00 (LB / FT) 2.42	SQUARE STEEL (IN) 2.50 (LB / FT) 3.35	TUBULAR STEEL Ø (IN) FOUNDATION	TUBULAR STEEL Ø (IN) 3.00 (LB / FT) 7.60	TUBULAR STEEL Ø (IN) 3.50 (LB / FT) 9.00	TUBULAR STEEL Ø (IN) 4.00 (LB / FT) 10.80	TUBULAR STEEL Ø (IN) 5.00 (LB / FT) 14.60	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL LOCATION SHSM	SIGN DETAIL LOCATION PROJECT SHEET #	SIGN DETAIL LOCATION STANDARD SHEET #
WINDSOR SB							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																			"SHSM"-STANDARD HIGHWAY SIGNS AND MARKINGS			
SB	3.366	E	M3-1	24	12		(CONT.)	2.00																		**BLACK ON WHITE**; NORTH	X		
		E	M1-4	24	24			4.00																		US ROUTE 5	X		
		E	M6-3	21	15			2.19																		**BLACK ON WHITE**; UP ARROW	X		
SB	3.366	H	D1-1A	54	7.5		ASCUTNEY 5 --->						1		X											ALL EXISTING SIGNS ON THIS ASSEMBLY FACE EB VT ROUTE 44 AT THE JCT WITH US-5			
		H	D1-1A	54	7.5		BRATTLEBORO 50 --->						1													REMOVE ALL EXISTING SIGNS, SIGN FRAME AND POST; THE POST IS A SINGLE I-BEAM STYLE POST			
		H	M3-1	24	12		NORTH						1																
		H	M1-4	24	24		US ROUTE 5						1																
		H	M6-1L	21	15		LEFT ARROW						1																
		H	M3-3	24	12		SOUTH						1																
		H	M1-4	24	24		US ROUTE 5						1																
		H	M6-1R	21	15		(BACK-TO-BACK ASSEMBLY) RIGHT ARROW						1																
		G	VD1-1A	72	12		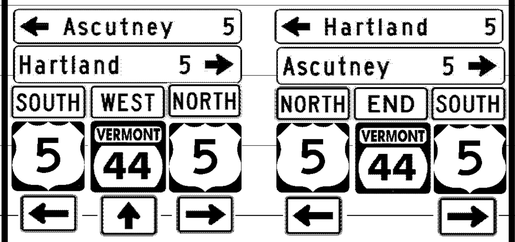	6.00								2			X					#3	<--- ASCUTNEY 5; **THE NEXT 11 SIGNS FACE WB TRAFFIC ON BRIDGE ST (TH-4),** IN SAME POSITION AS REMOVAL		14	
		G	VD1-1A	72	12			6.00																		HARTLAND 5 --->; INSTALL THE SIGNS AS SHOWN IN THE SIGN LEGEND		16	
		G	M3-3	24	12			2.00																		**BLACK ON WHITE**; "SOUTH"	X		
		G	M1-4	24	24		(CONT. ON NEXT PAGE)	4.00																		US ROUTE 5	X		
							SHEET TOTALS	26.19	0.00	0	0	0	8	0	0	2		30.0		0	0.0	0.0	0.0	0.0					
								SF	SF	EA	EA	EA	EA	EA	EA	EA		FT		EA	LB	LB	LB	LB					
							TOWN DIRECTIONAL TOTALS	491.1	0.0	35	13	13	91	0	0	66		990.0		0	0.0								

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: **SPRINGFIELD-HARTFORD**
PROJECT NUMBER: **STPG SIGN(33)**

FILE NAME: **WINDSOR US-5 SB** PLOT DATE: **2/13/2012**
PROJECT MANAGER: **A. GAMBLE** DRAWN BY: **M. MILLER**
DESIGNED BY: **M. MILLER** CHECKED **A. GAMBLE**
WINDSOR US-5 SB 10 SHEET **106** OF **162**