| DIRECTION | MILEPOINT | LOCATION CODE (SHEET 2) | SIGN CODE | WIDTH (IN) | HEIGHT (IN) | SHEETING REMARKS | SIGN LEGEND | NEW SIGNS "A" | NEW SIGNS "B" | EXISTING SIGNS RETAIN | EXISTING SIGNS SALVAGE FROM | EXISTING SIGNS SALVAGE TO | EXISTING SIGNS REMOVE | EXIST POST RETAIN | EXIST POST REMOVE | NUMBER OF NEW SQUARE STEEL POSTS | SQUARE STEEL (IN) 1.75 (LB / FT) 1.88 | SQUARE STEEL (IN) 2.00 (LB / FT) 2.42 | SQUARE STEEL (IN) 2.50 (LB / FT) 3.35 | TUBULAR STEEL Ø (IN) FOUNDATION | TUBULAR STEEL Ø (IN) 3.00 (LB / FT) 7.60 | TUBULAR STEEL Ø (IN) 3.50 (LB / FT) 9.00 | TUBULAR STEEL Ø (IN) 4.00 (LB / FT) 10.80 | TUBULAR STEEL Ø (IN) 5.00 (LB / FT) 14.60 | SIGN FRAME REQUIRED | REMARKS | SIGN DETAIL LOCATION SHSM | SIGN DETAIL LOCATION PROJECT SHEET # | SIGN DETAIL LOCATION STANDARD SHEET # |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **THETFORD US 5 NB** | | | | | | | FY-FLUORESCENT YELLOW<br>FYG-FLUORESCENT YELLOW GREEN | | | | | | | | | | | | | | | | | | | | "SHSM"-STANDARD HIGHWAY SIGNS AND MARKINGS | | | |
| | | A | M6-1 | 21 | 15 | | | | | | | | 1 | | | | | | | | | | | | | | | | |
| | | A | M3-1 | 24 | 12 | | | | | | | | 1 | | | | | | | | | | | | | | | | |
| | | A | M1-4 | 24 | 24 | | | | | | | | 1 | | | | | | | | | | | | | | | | |
| | | A | M6-3 | 21 | 15 | | | | | | | | 1 | | | | | | | | | | | | | | | | |
| | | A | VD1-1A | 72 | 12 | | 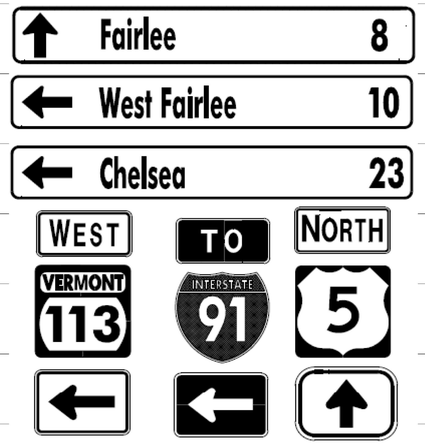 | 6.00 | | | | | | | | | | | | 2 | | 182 | | | 3A | | | 4 | |
| | | A | VD1-1A | 72 | 12 | | | 6.00 | | | | | | | | | | | | | | | | | | | | 4 | |
| | | A | VD1-1A | 72 | 12 | | | 6.00 | | | | | | | | | | | | | | | | | | | | 4 | |
| | | A | M3-4 | 24 | 12 | | | 2.00 | | | | | | | | | | | | | | | | | | | GREEN ON WHITE | X | | |
| | | A | M1-5A | 30 | 24 | | | 5.00 | | | | | | | | | | | | | | | | | | | | | | E-136B |
| | | A | M6-1 | 21 | 15 | | | 2.19 | | | | | | | | | | | | | | | | | | | GREEN ON WHITE | X | | |
| | | A | M4-5 | 24 | 12 | | | 2.00 | | | | | | | | | | | | | | | | | | | WHITE ON BLUE | X | | |
| | | A | M1-1 | 24 | 24 | | | 4.00 | | | | | | | | | | | | | | | | | | | | X | | |
| | | A | M6-1 | 21 | 15 | | | 2.19 | | | | | | | | | | | | | | | | | | | WHITE ON BLUE | X | | |
| | | A | M3-1 | 24 | 12 | | | 2.00 | | | | | | | | | | | | | | | | | | | BLACK ON WHITE | X | | |
| | | A | M1-4 | 24 | 24 | | | 4.00 | | | | | | | | | | | | | | | | | | | | X | | |
| | | | | | | | SHEET TOTALS | 41.38 | 0.00 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | | | 2 | 0 | 182 | 0 | 0 | | | | | |
| | | | | | | | | SF | SF | EA | EA | EA | EA | EA | EA | EA | FT | | | EA | LB | LB | LB | LB | | | | | |
| | | | | | | | TOWN DIRECTIONAL TOTALS | 243.9 | 0.0 | 25.0 | 2.0 | 2.0 | 65 | 0.0 | 0.0 | 28 | 420.0 | | | 4 | | 364.8 | | | | | | | |

**SIGN SUMMARY SHEET**

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: **NORWICH - FAIRLEE**
PROJECT NUMBER: **STPG SIGN (34)**

FILE NAME: **10C334** | PLOT DATE: **5/2/2011**
PROJECT MANAGER: **A.GAMBLE** | DRAWN BY: **D.CROSSLEY**
DESIGNED BY: **D.CROSSLEY** | CHECKED BY: **QAU**
THETFORD U.S. 5 NORTHBOUND 6 | SHEET **24** OF **65**