



653.40 - INLET PROTECTION DEVICE, TYPE I
 STA. 33+97.28, RT.

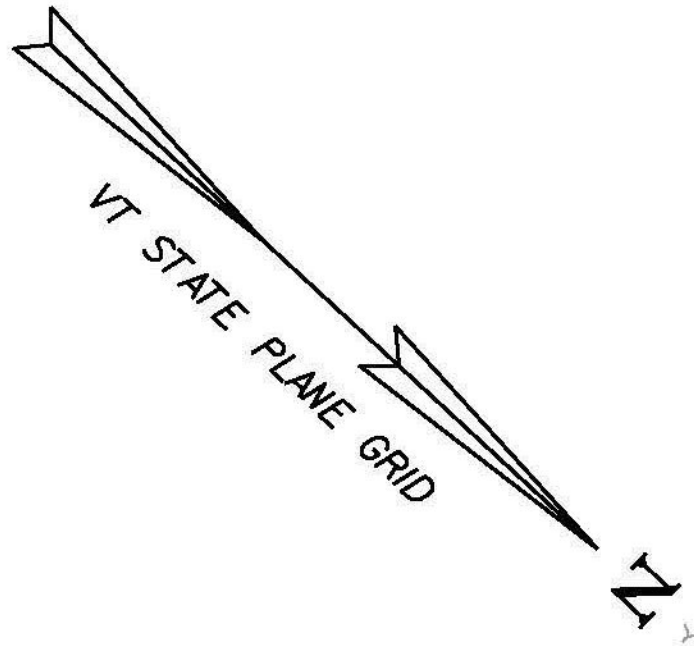

MATCH LINE STA 31+75

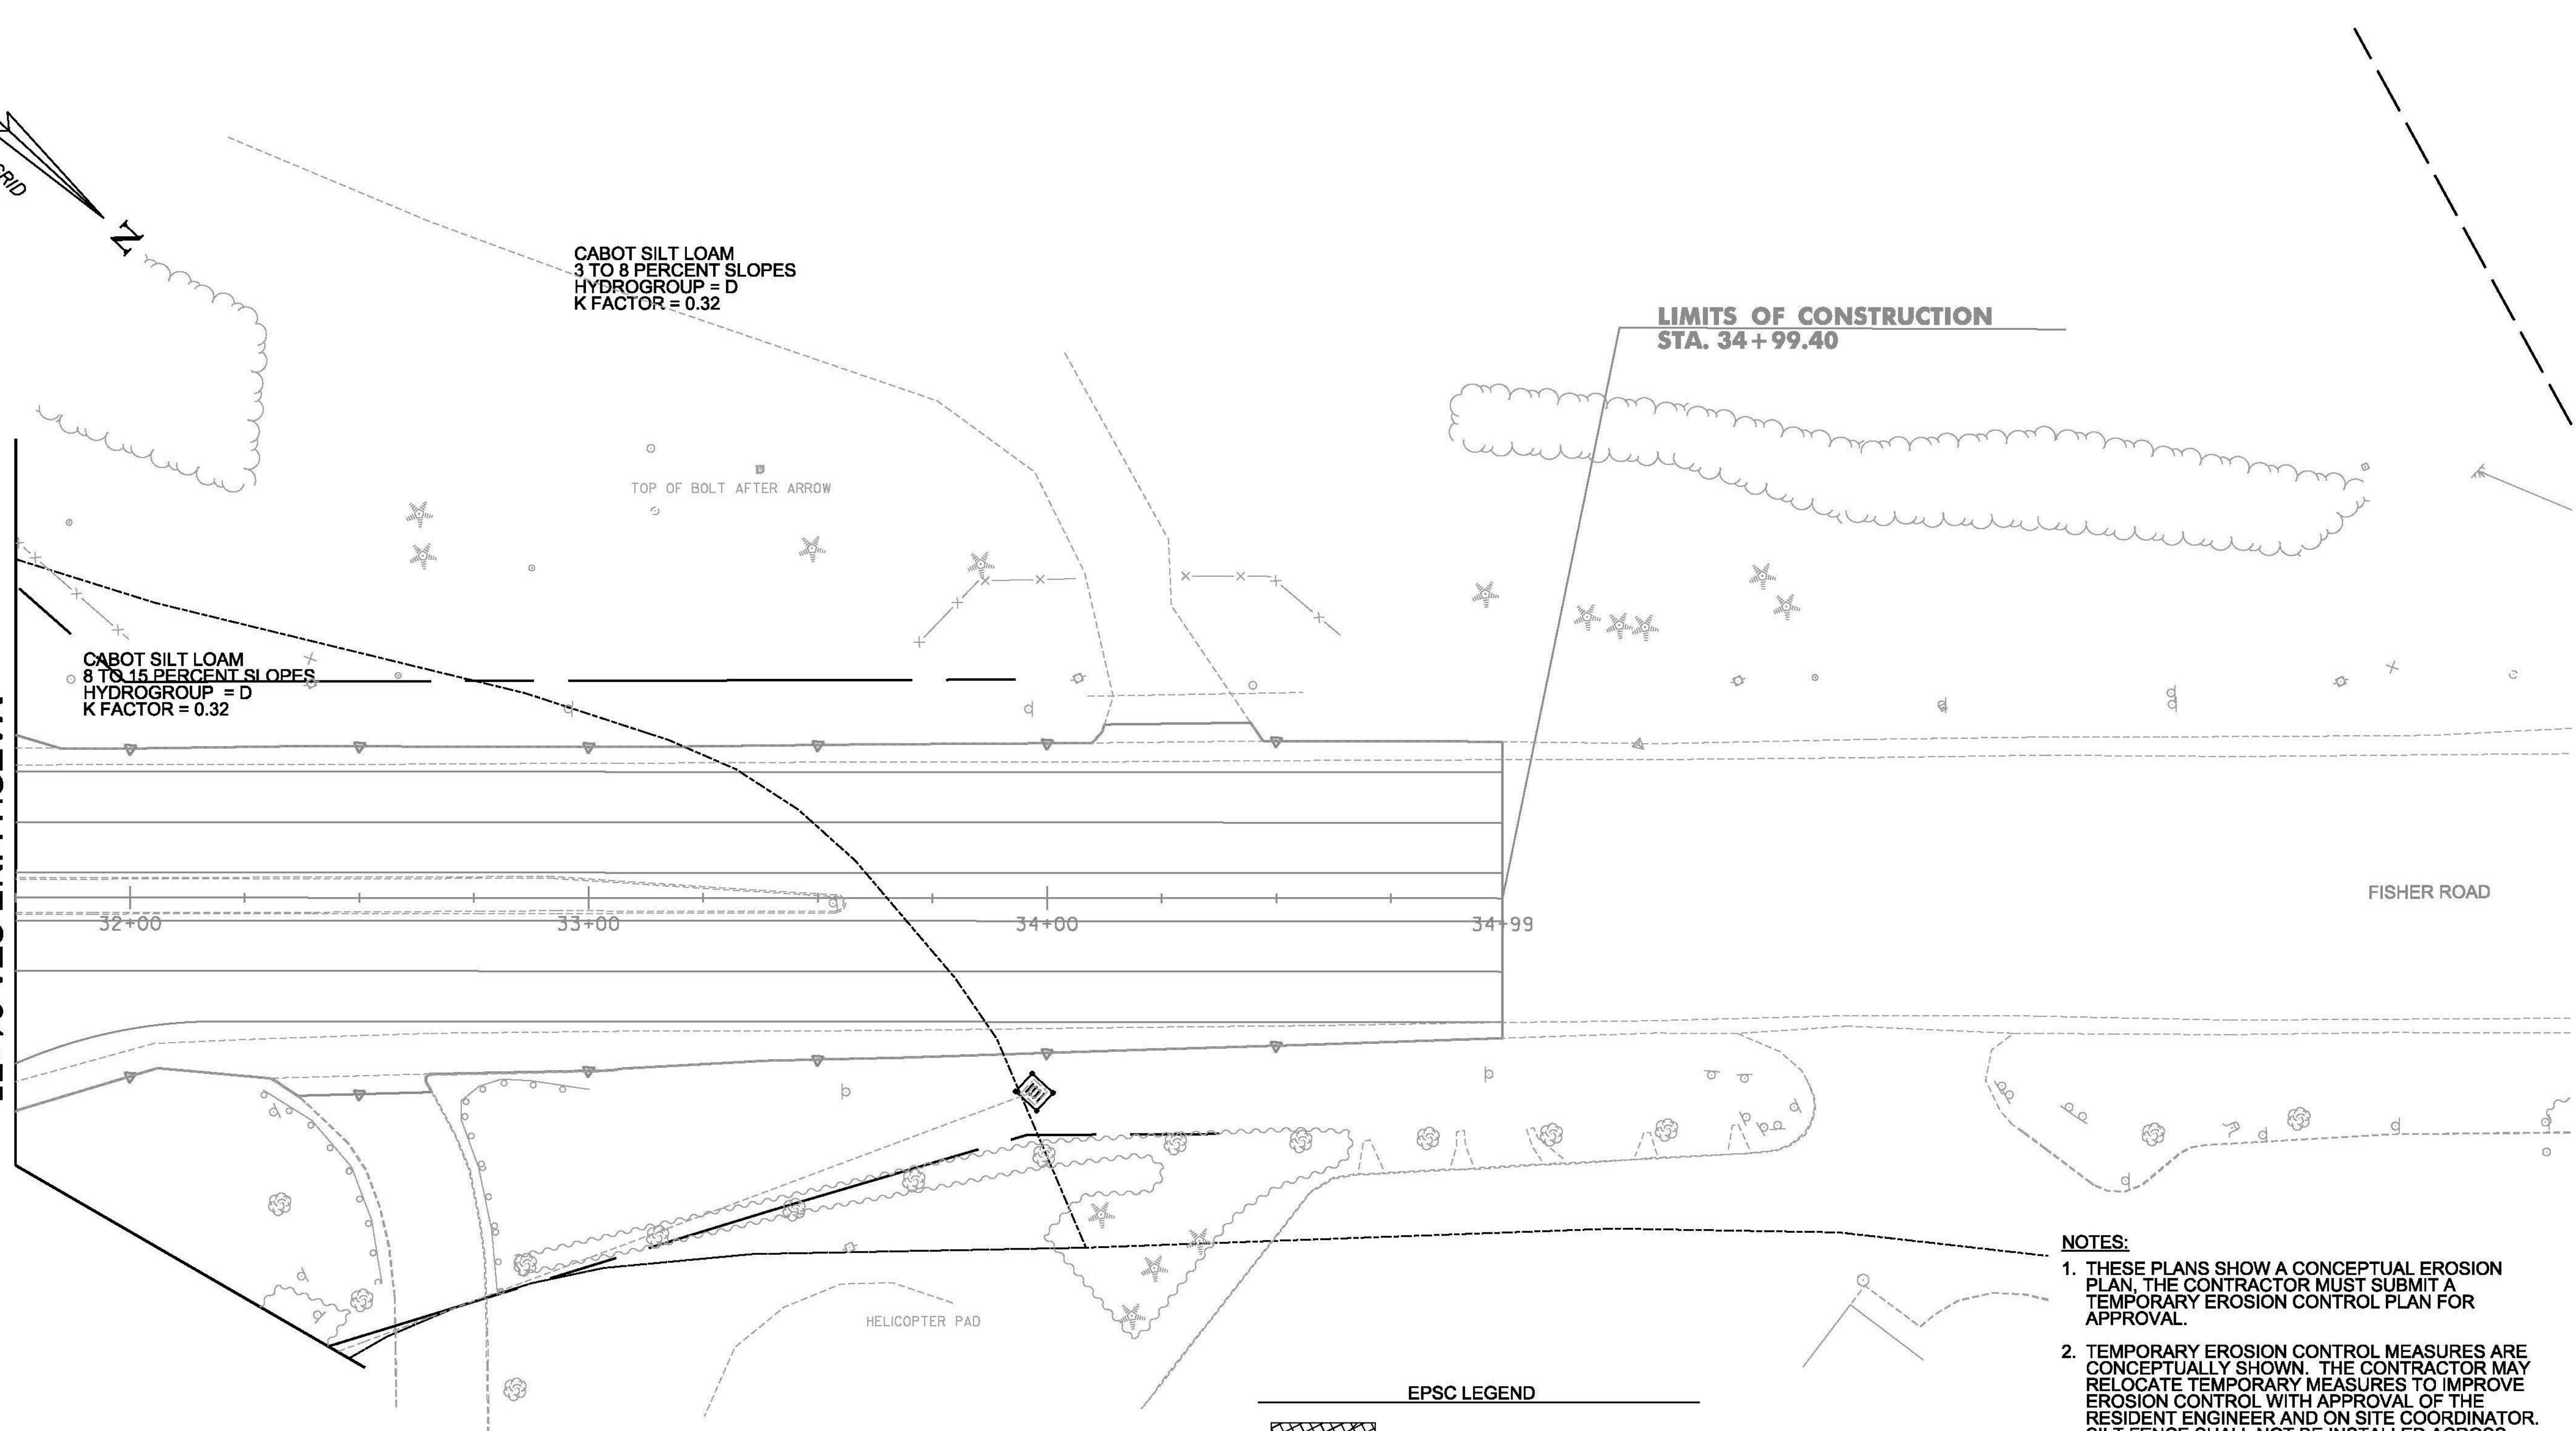

CABOT SILT LOAM
 8 TO 15 PERCENT SLOPES
 HYDROGROUP = D
 K FACTOR = 0.32

CABOT SILT LOAM
 3 TO 8 PERCENT SLOPES
 HYDROGROUP = D
 K FACTOR = 0.32

TOP OF BOLT AFTER ARROW

LIMITS OF CONSTRUCTION
 STA. 34+99.40


FISHER ROAD

HELICOPTER PAD

BUCKLAND SILT LOAM
 8 TO 15 PERCENT SLOPES
 HYDROGROUP = C
 K FACTOR = 0.32

EPSC LEGEND	
	TEMPORARY EROSION MATTING
	PROJECT DEMARCATION
	PREFABRICATED CHECK DAMS
	SILT FENCE
	INLET PROTECTION, TYPE I
	SOIL TYPE BOUNDARY
	LIMITS OF CONSTRUCTION (SOIL DISTURBANCE)
	PIPE INLET PROTECTION

- NOTES:**
1. THESE PLANS SHOW A CONCEPTUAL EROSION PLAN, THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR APPROVAL.
 2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN. THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE RESIDENT ENGINEER AND ON SITE COORDINATOR. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
 3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE RESIDENT ENGINEER AND ON SITE COORDINATOR.
 4. REFER TO TEMPORARY EROSION CONTROL DETAIL SHEETS FOR ADDITIONAL DETAILS.

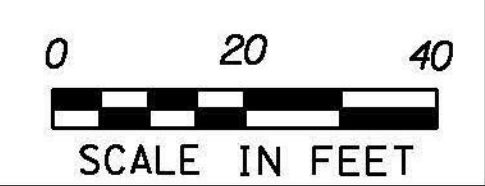

PROJECT NAME:	BERLIN	FILE NAME:	+lib358bdr.dgn	PLOT DATE:	10/20/2014
PROJECT NUMBER:	STPG SGNL(40)	PROJECT LEADER:	P. COBURN	DRAWN BY:	T. SISSON
		DESIGNED BY:	T. SISSON	CHECKED BY:	M. LACROIX
		EPSC CONSTRUCTION SHEET 4		SHEET	88 OF 123