

653.25 - TEMPORARY STONE CHECK DAM, TYPE I
 STA. 103+25.00, LT. - STA. 103+75.00, LT.

653.20 - TEMPORARY EROSION MATTING
 STA. 102+50.00, LT. - STA. 103+75.00, LT.


653.40 - INLET PROTECTION DEVICE, TYPE I
 STA. 78+44.92, LT.
 STA. 79+59.80, RT.
 STA. 80+53.78, LT.
 STA. 81+06.79, LT.

653.55 - PROJECT DEMARCATION FENCE
 STA. 102+43.44, LT. - 103+75.00, LT.

BUCKLAND SILT LOAM
 8 TO 15 PERCENT SLOPES
 HYDROGROUP = C
 K FACTOR = 0.32

MATCH LINE STA 76+00

MATCH LINE STA 81+77.14

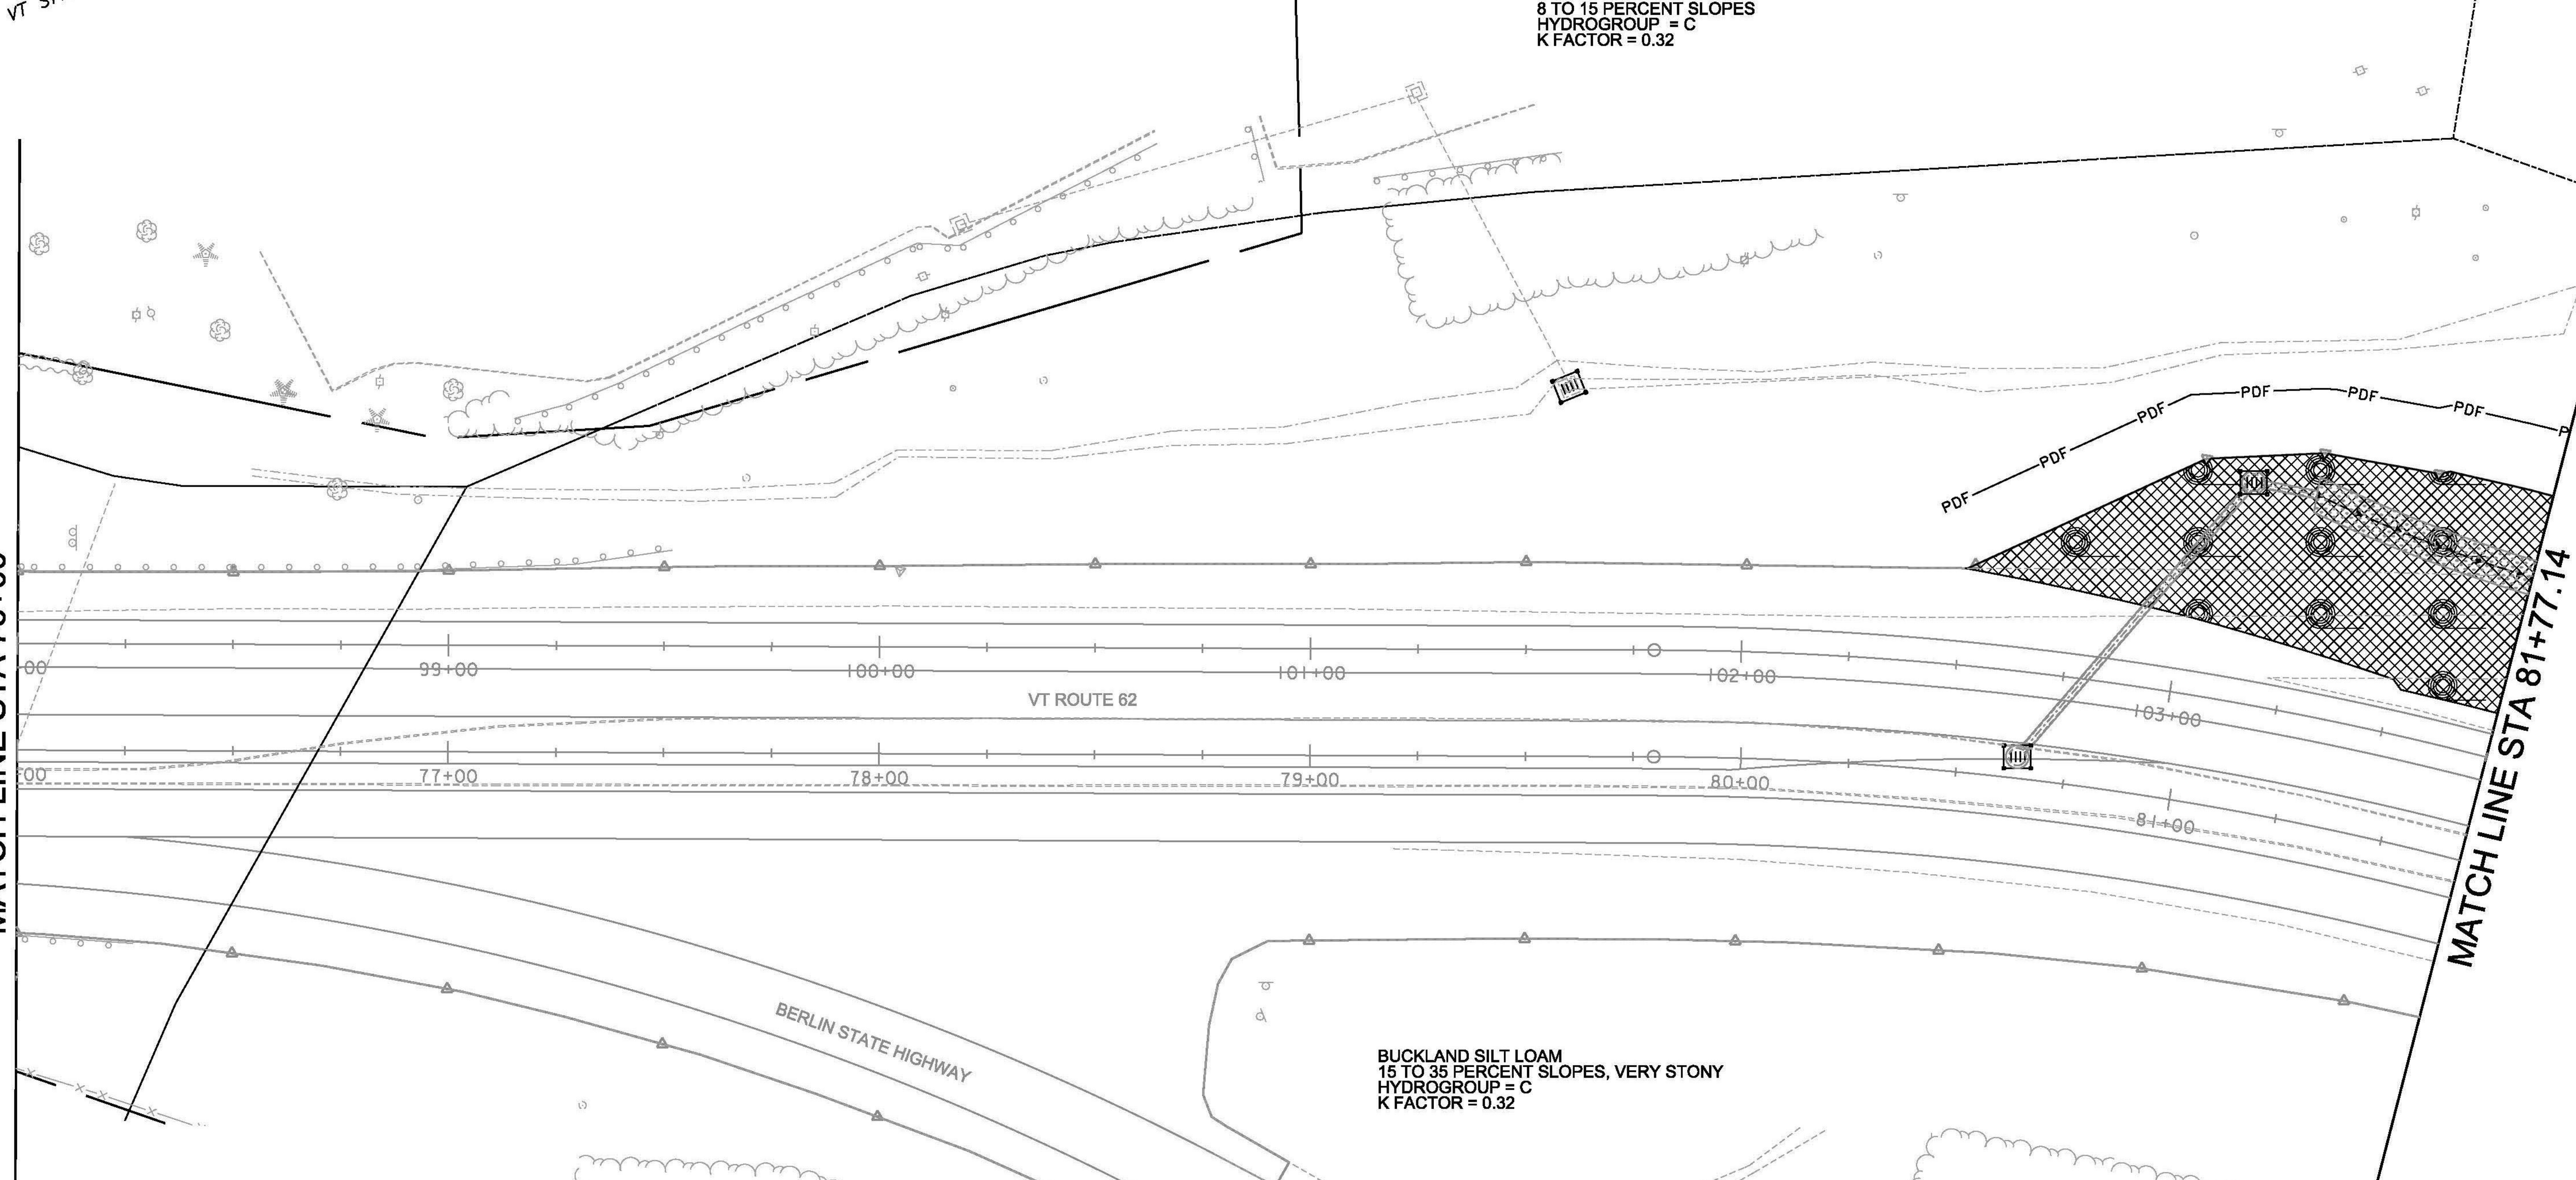


BUCKLAND SILT LOAM
 15 TO 35 PERCENT SLOPES, VERY STONY
 HYDROGROUP = C
 K FACTOR = 0.32

EPSC LEGEND

	TEMPORARY EROSION MATTING
	PROJECT DEMARCATION
	PREFABRICATED CHECK DAMS
	SILT FENCE
	INLET PROTECTION, TYPE I
	SOIL TYPE BOUNDARY
	LIMITS OF CONSTRUCTION (SOIL DISTURBANCE)
	PIPE INLET PROTECTION

- NOTES:**
1. THESE PLANS SHOW A CONCEPTUAL EROSION PLAN. THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR APPROVAL.
 2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN. THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE RESIDENT ENGINEER AND ON SITE COORDINATOR. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
 3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE RESIDENT ENGINEER AND ON SITE COORDINATOR.
 4. REFER TO TEMPORARY EROSION CONTROL DETAIL SHEETS FOR ADDITIONAL DETAILS.

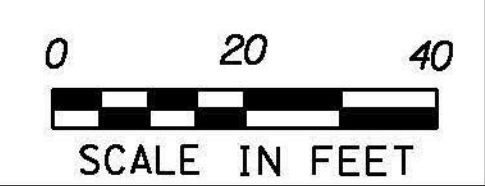

PROJECT NAME: BERLIN	PLOT DATE: 10/20/2014
PROJECT NUMBER: STPG SGNL(40)	DRAWN BY: T. SISSON
FILE NAME: +11b358bdr.dgn	CHECKED BY: M. LACROIX
DESIGNED BY: T. SISSON	SHEET 89 OF 123
EPSC CONSTRUCTION SHEET 5	