


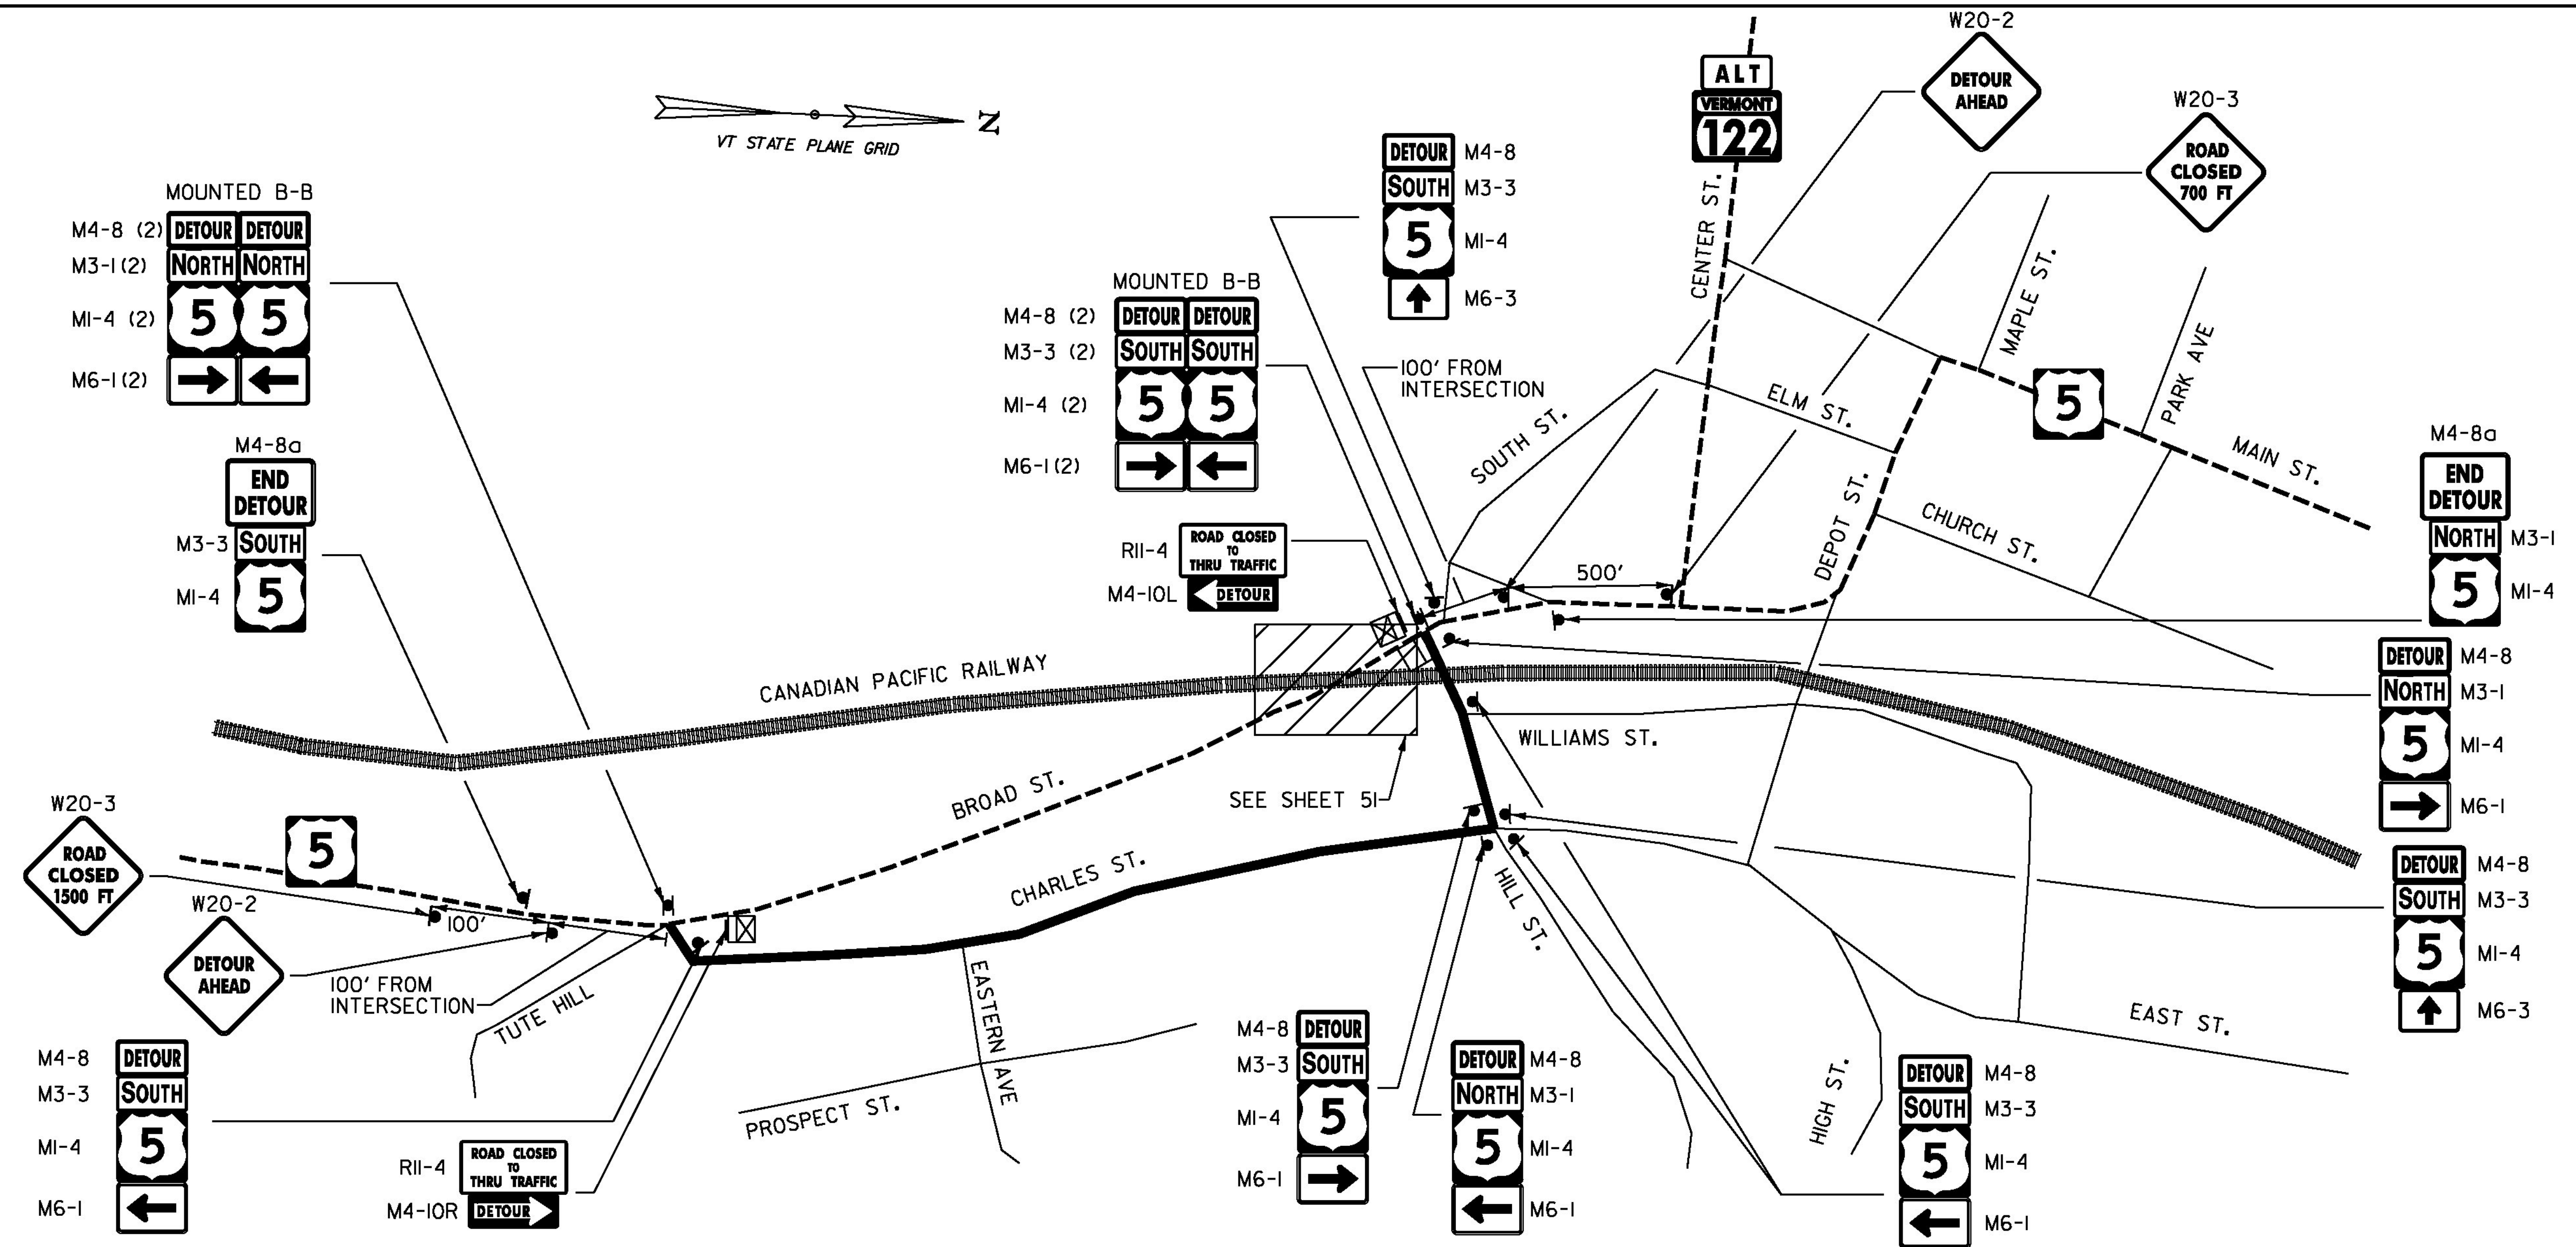

NOTES:

- BROAD STREET (U.S. ROUTE 5) WILL BE CLOSED TO THROUGH TRAFFIC BETWEEN CHARLES STREET AND HILL STREET DURING THE CONSTRUCTION OF THE AARDOT 850-919D RAILROAD CROSSING.
- THE TRAFFIC DETOUR SHALL BE USED THROUGHOUT THE ENTIRE RAILROAD CROSSING CONSTRUCTION. THE INTENT OF THE DETOUR IS TO ELIMINATE VEHICLE TRAFFIC FROM THE RAILROAD CONSTRUCTION AREA.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE THEIR SCHEDULE IN SUCH A MANNER AS TO GIVE THE VILLAGE OF LYNDONVILLE AND THE TOWN OF LYNDON AT LEAST TWO WEEKS' NOTICE PRIOR TO COMMENCING THE RAILROAD CROSSING CONSTRUCTION. ALL COMMUNICATION SHALL INCLUDE EMERGENCY DISPATCH PERSONNEL AS DESCRIBED IN THE SPECIAL PROVISIONS.
- NO DETOUR SIGNS SHALL BE INSTALLED AS TO INTERFERE OR OBSTRUCT THE VIEW OF EXISTING TRAFFIC CONTROL DEVICES, STOPPING SIGHT DISTANCE, OR CORNER SIGHT DISTANCE FROM DRIVES AND TOWN HIGHWAYS. EXISTING SIGNS WHICH CONFLICT WITH THE DETOUR SHALL BE COMPLETELY COVERED OR REMOVED.
- ALL TRAFFIC CONTROL DETAILS MUST BE DESIGNED AND IMPLEMENTED IN ACCORDANCE WITH SECTION 6 OF THE LATEST EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) AND THE MOST RECENT VAOT STANDARDS.
- DETOUR ZONE SIGN LAYOUT SHALL BE IN ACCORDANCE WITH SECTION 6 OF THE LATEST EDITION OF THE MUTCD.

- DETOUR SIGNS SHALL BE IN NEW OR LIKE NEW CONDITION PER VAOT STANDARDS AND SPECIAL PROVISIONS.
- DIAMOND SHAPED DETOUR SIGNS SHALL BE 4' X 4' WITH BLACK TEXT AND BORDER ON A RETROREFLECTIVE FLUORESCENT ORANGE BACKGROUND.
- RETROREFLECTIVE SHEETING SHALL BE TYPE VIII OR IX MINIMUM AS NOTED ON VAOT STANDARD T-1 AND IN SUBSECTION 750.08.
- WHERE DETOUR SIGNS ARE PLACED BEHIND GUARDRAIL, THEY SHALL BE ADJUSTED SUCH THAT THE BOTTOMS OF THE SIGNS ARE ABOVE THE TOP OF GUARDRAIL.
- THE ALLOWABLE DURATION AND TIMING OF ROAD CLOSURE SHALL BE COORDINATED WITH THE RAILROAD, THE VILLAGE, THE TOWN AND OTHER AFFECTED PARTIES THROUGH THE ENGINEER.
- THE CONTRACTOR SHALL MAINTAIN PEDESTRIAN ACCESS AT ALL TIMES IN CONFORMANCE WITH MUTCD SECTION 6D AND THE PEDESTRIAN TRAFFIC CONTROL NOTES ON SHEET 247.
- THE CONTRACTOR SHALL MAINTAIN DRIVE ACCESS AT ALL TIMES.
- ALL WORK DEPICTED ON THIS SHEET SHALL BE INCLUDED IN THE UNIT PRICE BID FOR ITEM 900.645 SPECIAL PROVISION (TRAFFIC CONTROL, RAIL HIGHWAY CROSSING) (AARDOT 850-919D).

VILLAGE OF LYNDON	RII-2	RII-4	M4-8a	M4-10R	M4-10L	W20-2	W20-3	TYPE 3 BARRICADE	TYPE 3 BARRICADE (MOD.)	M4-8	M3-1	M3-3	MI-4	M6-1	M6-3
ROAD CLOSURE AREA	6							4	8						
BROAD ST. & CHARLES INTERSECTION		1	1	1		1	1		1	3	2	2	4	3	
CHARLES ST. & HILL ST. INTERSECTION										4	1	3	4	3	
HILL ST. & WILLIAMS ST. INTERSECTION										1		1	1	1	
BROAD ST. & HILL ST. INTERSECTION		1	1		1	1	1	1	1	3	2	2	4	3	
BROAD ST. & SOUTH ST.										1		1	1		1
TOTALS	6	2	2	1	1	2	2	5	10	12	5	9	14	10	1

LEGEND

- = RAIL/HIGHWAY CROSSING WORK AREA
- = SIGN (SHOWN FACING LEFT)
- = TYPE 3 BARRICADE
- = TYPE 3 BARRICADE (MOD.)

**DETOUR PLAN FOR CROSSING
AARDOT #850-919D**

NOT TO SCALE		PROJECT NAME: ST JOHNSBURY - LYNDON	
PROJECT NUMBER: STP 2936(1)		FILE NAME: pllc308.dgn	
PROJECT LEADER: G. EDWARDS		PLOT DATE: 5/5/2014	
DESIGNED BY: D. DRAPER		DRAWN BY: D. DRAPER	
		CHECKED BY: J. LITTLE	
		SHEET 50 OF 250	

