LOCATION				FEET OF DITCHING		MISCELLANEOUS ITEMS				REMARKS
						613.10	649.31	651.15	653.20	
SITE	STATION	STATION	POS.	PERCENT GRADE		STONE FILL, TYPE I	GEOT. UNDER STONE FILL	SEED	TEMP. EROS. MATT.	
				0-2.5	≥2.5	CY	SY	LB	SY	
ST. JOHNSBURY										
U.S. ROUTE 5 (MILL ST.)										
1	110+93	112+75	RT	200				1	89	WEST SIDE OF RR TRACKS
U.S. ROUTE 5 (OLD CENTER RD.)										
2	142+00		LT	43					19	WEST SIDE OF RR TRACKS
ALT. U.S. ROUTE 5										
3	1+13	6+35	LT		522	77	348			
4	6+90	10+48	LT		358	53	239			
LYNDON										
U.S. ROUTE 5										
5	141+10	142+50	RT	140				1	62	EAST SIDE OF RR TRACKS
SUBTOTALS					880	130	587	2	170	
TOTALS					880	130*	587*	2	170*	

*TOTALS CARRIED FORWARD TO THE ITEM DETAIL SUMMARY SHEETS (SEE SHEETS 12-25)

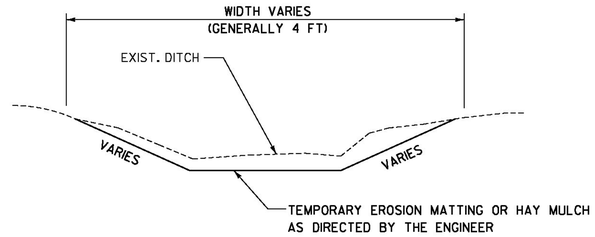

DITCH DETAIL 0 – 2.5 PERCENT

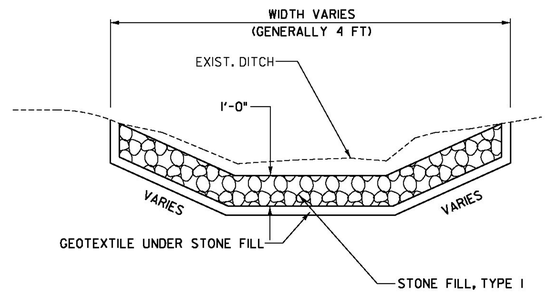

DITCH DETAIL 2.5 PERCENT TO 10 PERCENT

NOTES:

1. GRADES BETWEEN 0 AND 2.5 PERCENT SHALL USE ITEM 651.15, SEED AND EITHER ITEM 651.25, HAY MULCH OR ITEM 653.20, TEMPORARY EROSION MATTING AS DIRECTED BY THE ENGINEER.
2. GRADES BETWEEN 2.5 PERCENT TO 10 PERCENT SHALL USE ITEM 649.31, GEOTEXTILE UNDER STONE FILL AND ITEM 613.10, STONE FILL TYPE I, AS DIRECTED BY THE ENGINEER.
3. ANY GRADE GREATER THAN 10 PERCENT SHALL USE ITEM 649.31, GEOTEXTILE UNDER STONE FILL AND ITEM 613.11, STONE FILL, TYPE II OR AS DIRECTED BY THE ENGINEER.
4. PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGHOUT THE PROJECT, SHALL BE PERFORMED AT LOCATIONS INDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

NOT TO SCALE

Stantec

DITCH CLEANING DETAIL SHEET

PROJECT NAME: ST JOHNSBURY - LYNDON
PROJECT NUMBER: STP 2936(1)

FILE NAME: pllc308.dgn
PROJECT LEADER: G. EDWARDS
DESIGNED BY: D. DRAPER
PLOT DATE: 5/5/2014
DRAWN BY: D. DRAPER
CHECKED BY: J. LITTLE
SHEET 59 OF 250