

TEMPORARY 4 INCH WHITE LINE, PAINT  
 DURABLE 4 INCH WHITE LINE (OPTION BID ITEM)  
 254+50 TO 260+50 SOLID LT  
 254+50 TO 257+57 SOLID RT  
 257+57 TO 257+87 SOLID RT (TH 25)  
 258+16 TO 258+49 SOLID RT (TH 25)  
 258+49 TO 260+50 SOLID RT

TEMPORARY 4 INCH YELLOW LINE, PAINT  
 254+50 TO 257+81 SOLID LT & RT  
 258+01 DOUBLE SOLID RT (TH 25)  
 258+21 TO 260+50 SOLID LT & RT

DURABLE 4 INCH YELLOW LINE (OPTION BID ITEM)  
 258+01 DOUBLE SOLID RT (TH 25)

DURABLE 4 INCH YELLOW LINE, POLYUREA  
 254+50 TO 257+81 SOLID LT & RT  
 258+21 TO 260+50 SOLID LT & RT

TEMPORARY 24 INCH STOP BAR, PAINT  
 DURABLE 24 INCH STOP BAR (OPTION BID ITEM)  
 258+02 TO 258+28 RT (TH 25)

TEMPORARY LETTER OR SYMBOL, PAINT  
 DURABLE LETTER OR SYMBOL (OPTION BID ITEM)  
 258+11 LT - STOP (TH 25)

STEEL BEAM GUARDRAIL, GALVANIZED  
 254+50 TO 256+46.5 LT  
 255+90.5 TO 256+03 RT

STEEL BEAM GUARDRAIL, GALVANIZED W/8 FEET POSTS  
 254+50 TO 255+90.5 RT

ANCHOR FOR STEEL BEAM RAIL  
 256+03 RT  
 256+46.5 LT

REMOVAL AND DISPOSAL OF GUARDRAIL  
 254+50 TO 256+44 LT  
 254+50 TO 256+04 RT


DELINEATOR WITH STEEL POST  
 256+03 RT  
 256+46.5 LT

REHAB. DROP INLETS, CATCH BASINS,  
 OR MANHOLES, CLASS I, CLASS II  
 258+38 RT (TMH)  
 (TO BE ADJUSTED BY OTHERS)

MILLED RUMBLE STRIPS  
 254+50 TO 257+81 CL  
 258+21 TO 260+50 CL

REMOVING SIGNS  
 AS SHOWN - 3

ERECTING SALVAGED SIGNS  
 AS SHOWN - 2

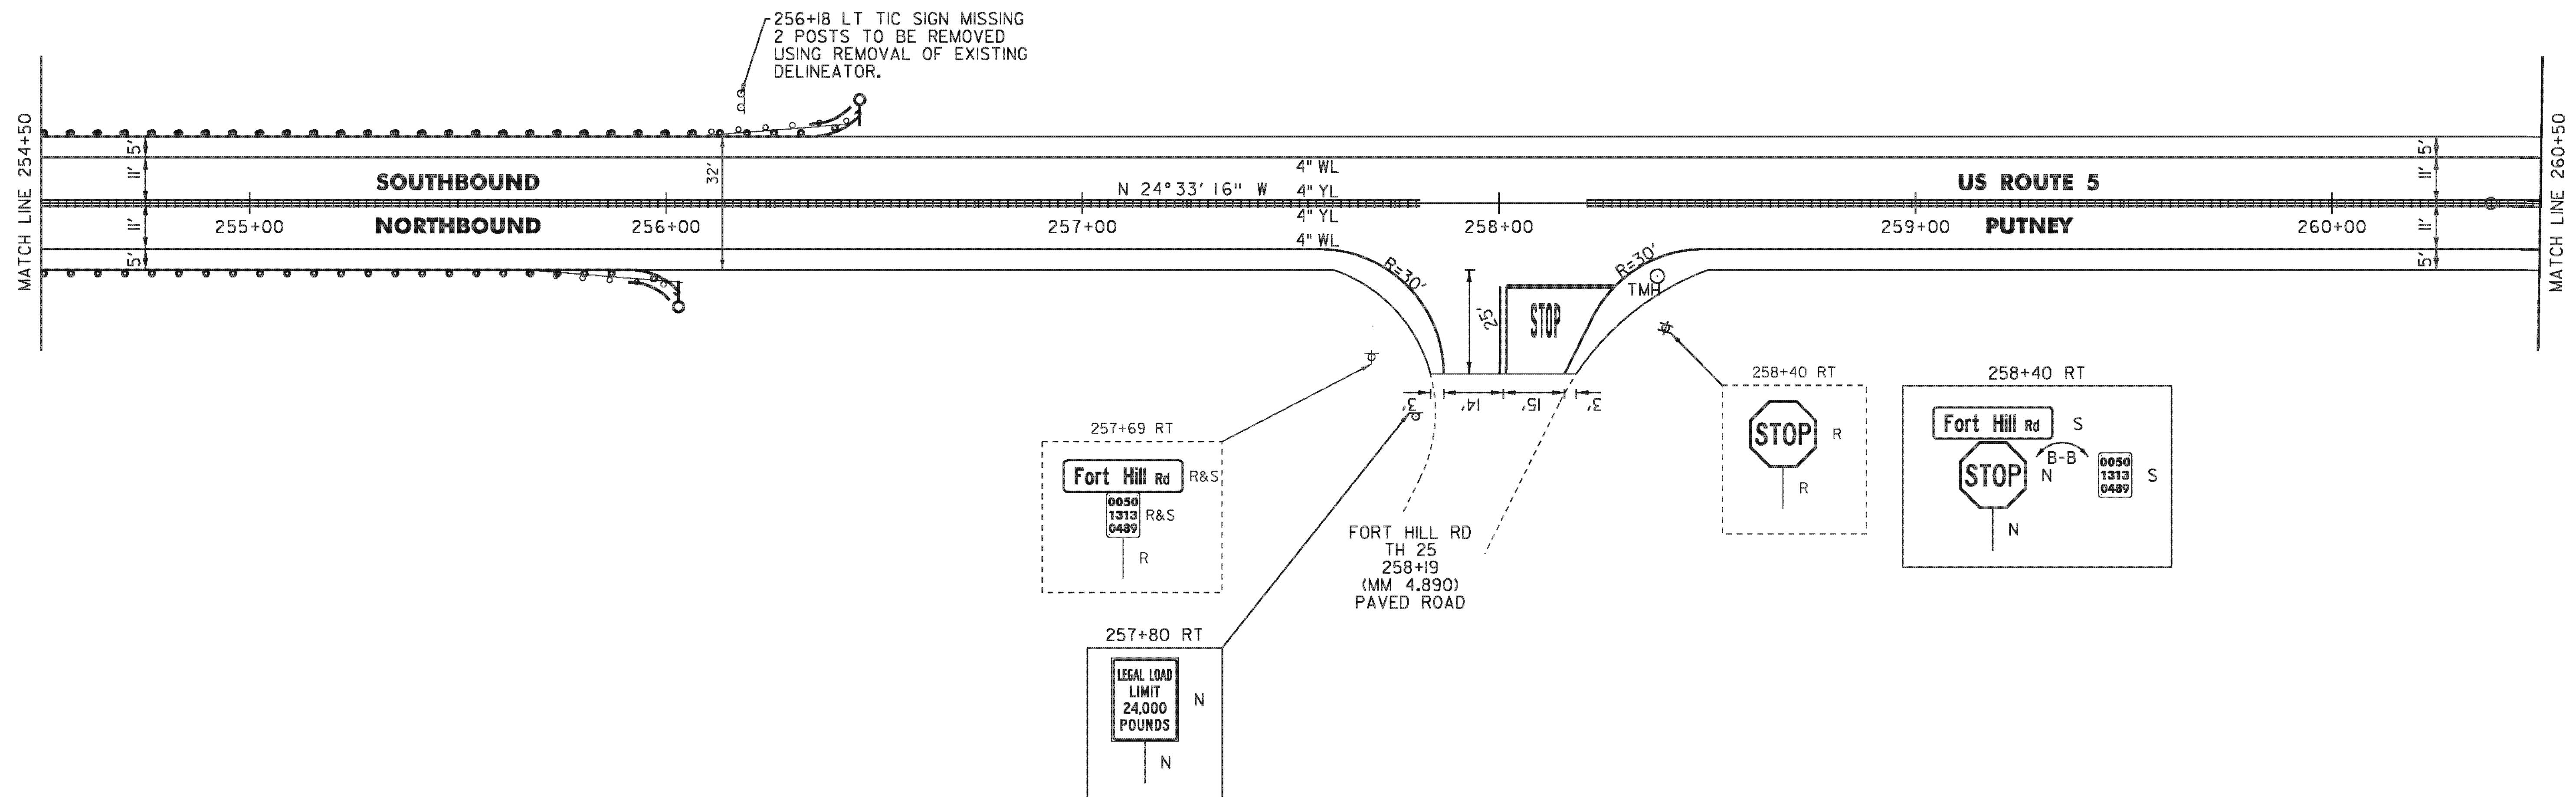

- LEGEND**
- R = REMOVE EXISTING
  - S = SALVAGE
  - R&S = REMOVE AND SALVAGE
  - N = NEW
  - RET = RETAIN
  - B-B = BACK TO BACK
  - = EXISTING GUARDRAIL
  - = PROPOSED GUARDRAIL
  - YL = YELLOW LINE
  - WL = WHITE LINE
  - = DELINEATOR
  - = UTILITY POLE

PROJECT NAME: PUTNEY-WESTMINSTER  
 PROJECT NUMBER: STP 2946(1)

FILE NAME: plic344bdr28.dgn  
 PROJECT LEADER: P. SHEDD  
 DESIGNED BY: N. LEMAY  
 ROADWAY LAYOUT 28 US 5

PLOT DATE: 18-DEC-2013  
 DRAWN BY: W. GORDON  
 CHECKED BY: P. SHEDD  
 SHEET 49 OF 138

NOT TO SCALE