

ADJUST ELEVATION OF VALVE BOX
SEE SHEET 21



RELOCATE MAIL BOX, SINGLE SUPPORT
STA. 29+37, LT (4) #4959 & #4961
STA. 29+42, RT #4964
STA. 30+86, LT

DURABLE & TEMPORARY 4 INCH WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS
AND RADII FOR SIDE ROADS)
STA. 26+00 TO 31+00, EDGE LINE LT & RT
STA. 26+00 TO 27+55, BIKE LANE LINE RT
STA. 26+00 TO 27+55, HATCH BUFFER RT

DURABLE & TEMPORARY 4 INCH YELLOW LINE
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
STA. 26+00 TO 31+00, SOLID LT & RT

DURABLE & TEMPORARY LETTER OR SYMBOL
STA. 28+69, LT BIKE LANE ARROW
STA. 28+81, LT BIKE LANE SYMBOL
STA. 30+44, RT BIKE LANE SYMBOL
STA. 30+56, RT BIKE LANE ARROW

REMOVING SIGNS
AS SHOWN - 1

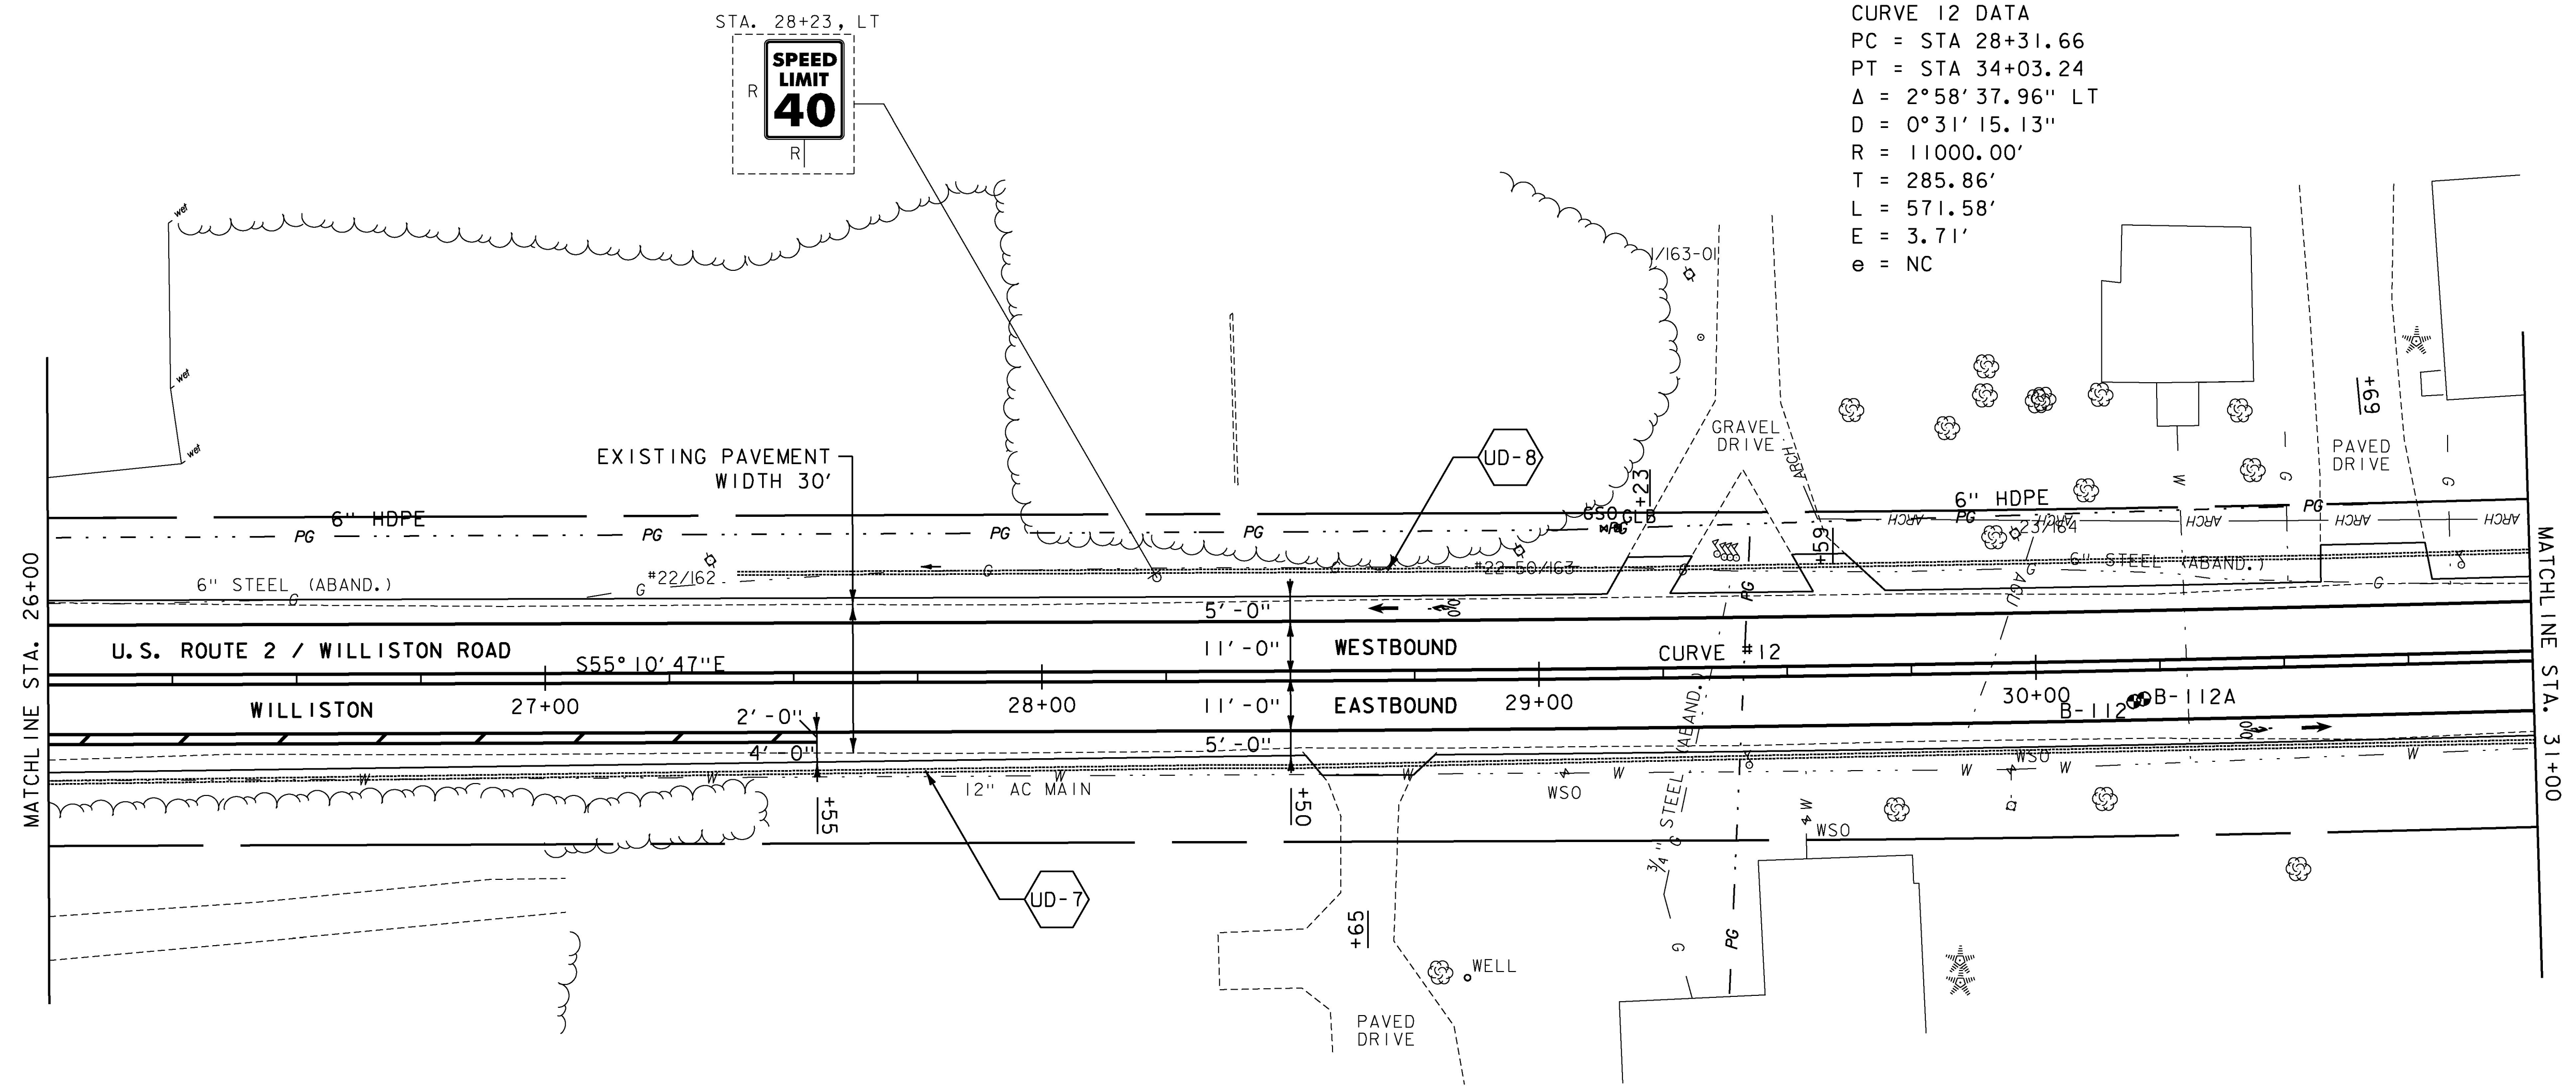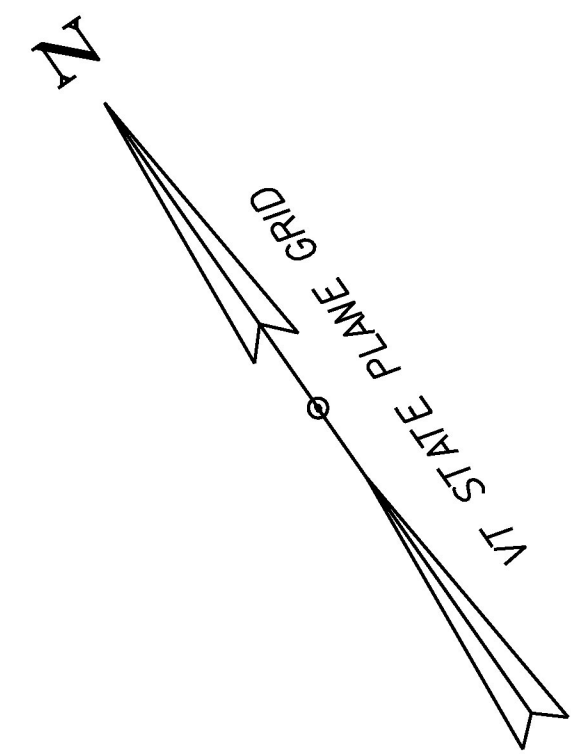

UD-7 STA. 26+00 TO 31+00, RT
CONSTRUCT 6 INCH UNDERDRAIN PIPE,
SEE SHEET 20 FOR DETAILS AND ASSOCIATED QUANTITIES

UD-8 STA. 27+41 TO 32+00, LT
CONSTRUCT 6 INCH UNDERDRAIN PIPE,
SEE SHEET 20 FOR DETAILS AND ASSOCIATED QUANTITIES

APPROXIMATE ENVIRONMENTALLY SENSITIVE LOCATIONS:

NO.	LIMITS	POS.	TYPE
1.	STA. 29+50 - 31+00, LT		ARCH

SOIL BORING DATA			
BORING#	DEPTH (FT.)	PCC	COMMENTS
B-112	0.5'	YES	AUGER REFUSAL ON CONCRETE
B-112A	5.0'	YES	

- NOTES:
- FOR LEGENDS, SEE SHEETS 3-4.
 - ALL EXISTING SIGNS NOT SHOWN ON THE PLANS SHALL BE RETAINED.



PROJECT NAME:	SOUTH BURLINGTON-WILLISTON
PROJECT NUMBER:	NH 2944(I)
FILE NAME:	zild340bdr.dgn
PROJECT LEADER:	G. EDWARDS
DESIGNED BY:	D. DRAPER
LAYOUT SHEET	13
PLOT DATE:	2/15/2017
DRAWN BY:	D. DRAPER
CHECKED BY:	J. LITTLE
SHEET	61 OF 249