

COLD PLANING, BITUMINOUS PAVEMENT
 10+37.5 - 10+87.5
 13+97.5 - 14+47.5

STONE FILL, TYPE I
 12+16.4 RT - 13+79.6 RT
 12+38.7 LT - 12+76.7 LT (DITCH)

STEEL BEAM GUARDRAIL, GALVANIZED
 11+75.8 RT - 11+92.0 RT
 12+85.8 RT - 14+06.6 RT

STEEL BEAM GUARDRAIL GALVANIZED/NESTED
 11+92.0 RT - 12+85.8 RT



ANCHOR FOR STEEL BEAM RAIL
 11+75.8 RT (SD G1-D)

REMOVAL AND DISPOSAL OF GUARDRAIL
 13+69.6 RT - 14+08.4 RT

SPECIAL PROVISION
 (STONE FILL, CULVERT LINING)
 4+46.8 RT - 5+18.3 RT

SPECIAL PROVISION
 (STONE FILL, CHANNEL ARMORING)
 12+29.4 RT - 13+80.3 RT
 2+50.0 LT - 4+46.8 LT
 3+98.2 RT - 4+46.8 RT

REGRADE EXISTING CHANNEL BANK TO MATCH EXISTING
 UPSTREAM AND DOWNSTREAM BANK. THIS WORK WILL
 BE PAID INCIDENTAL TO ITEM 203.27 UNCLASSIFIED
 CHANNEL EXCAVATION

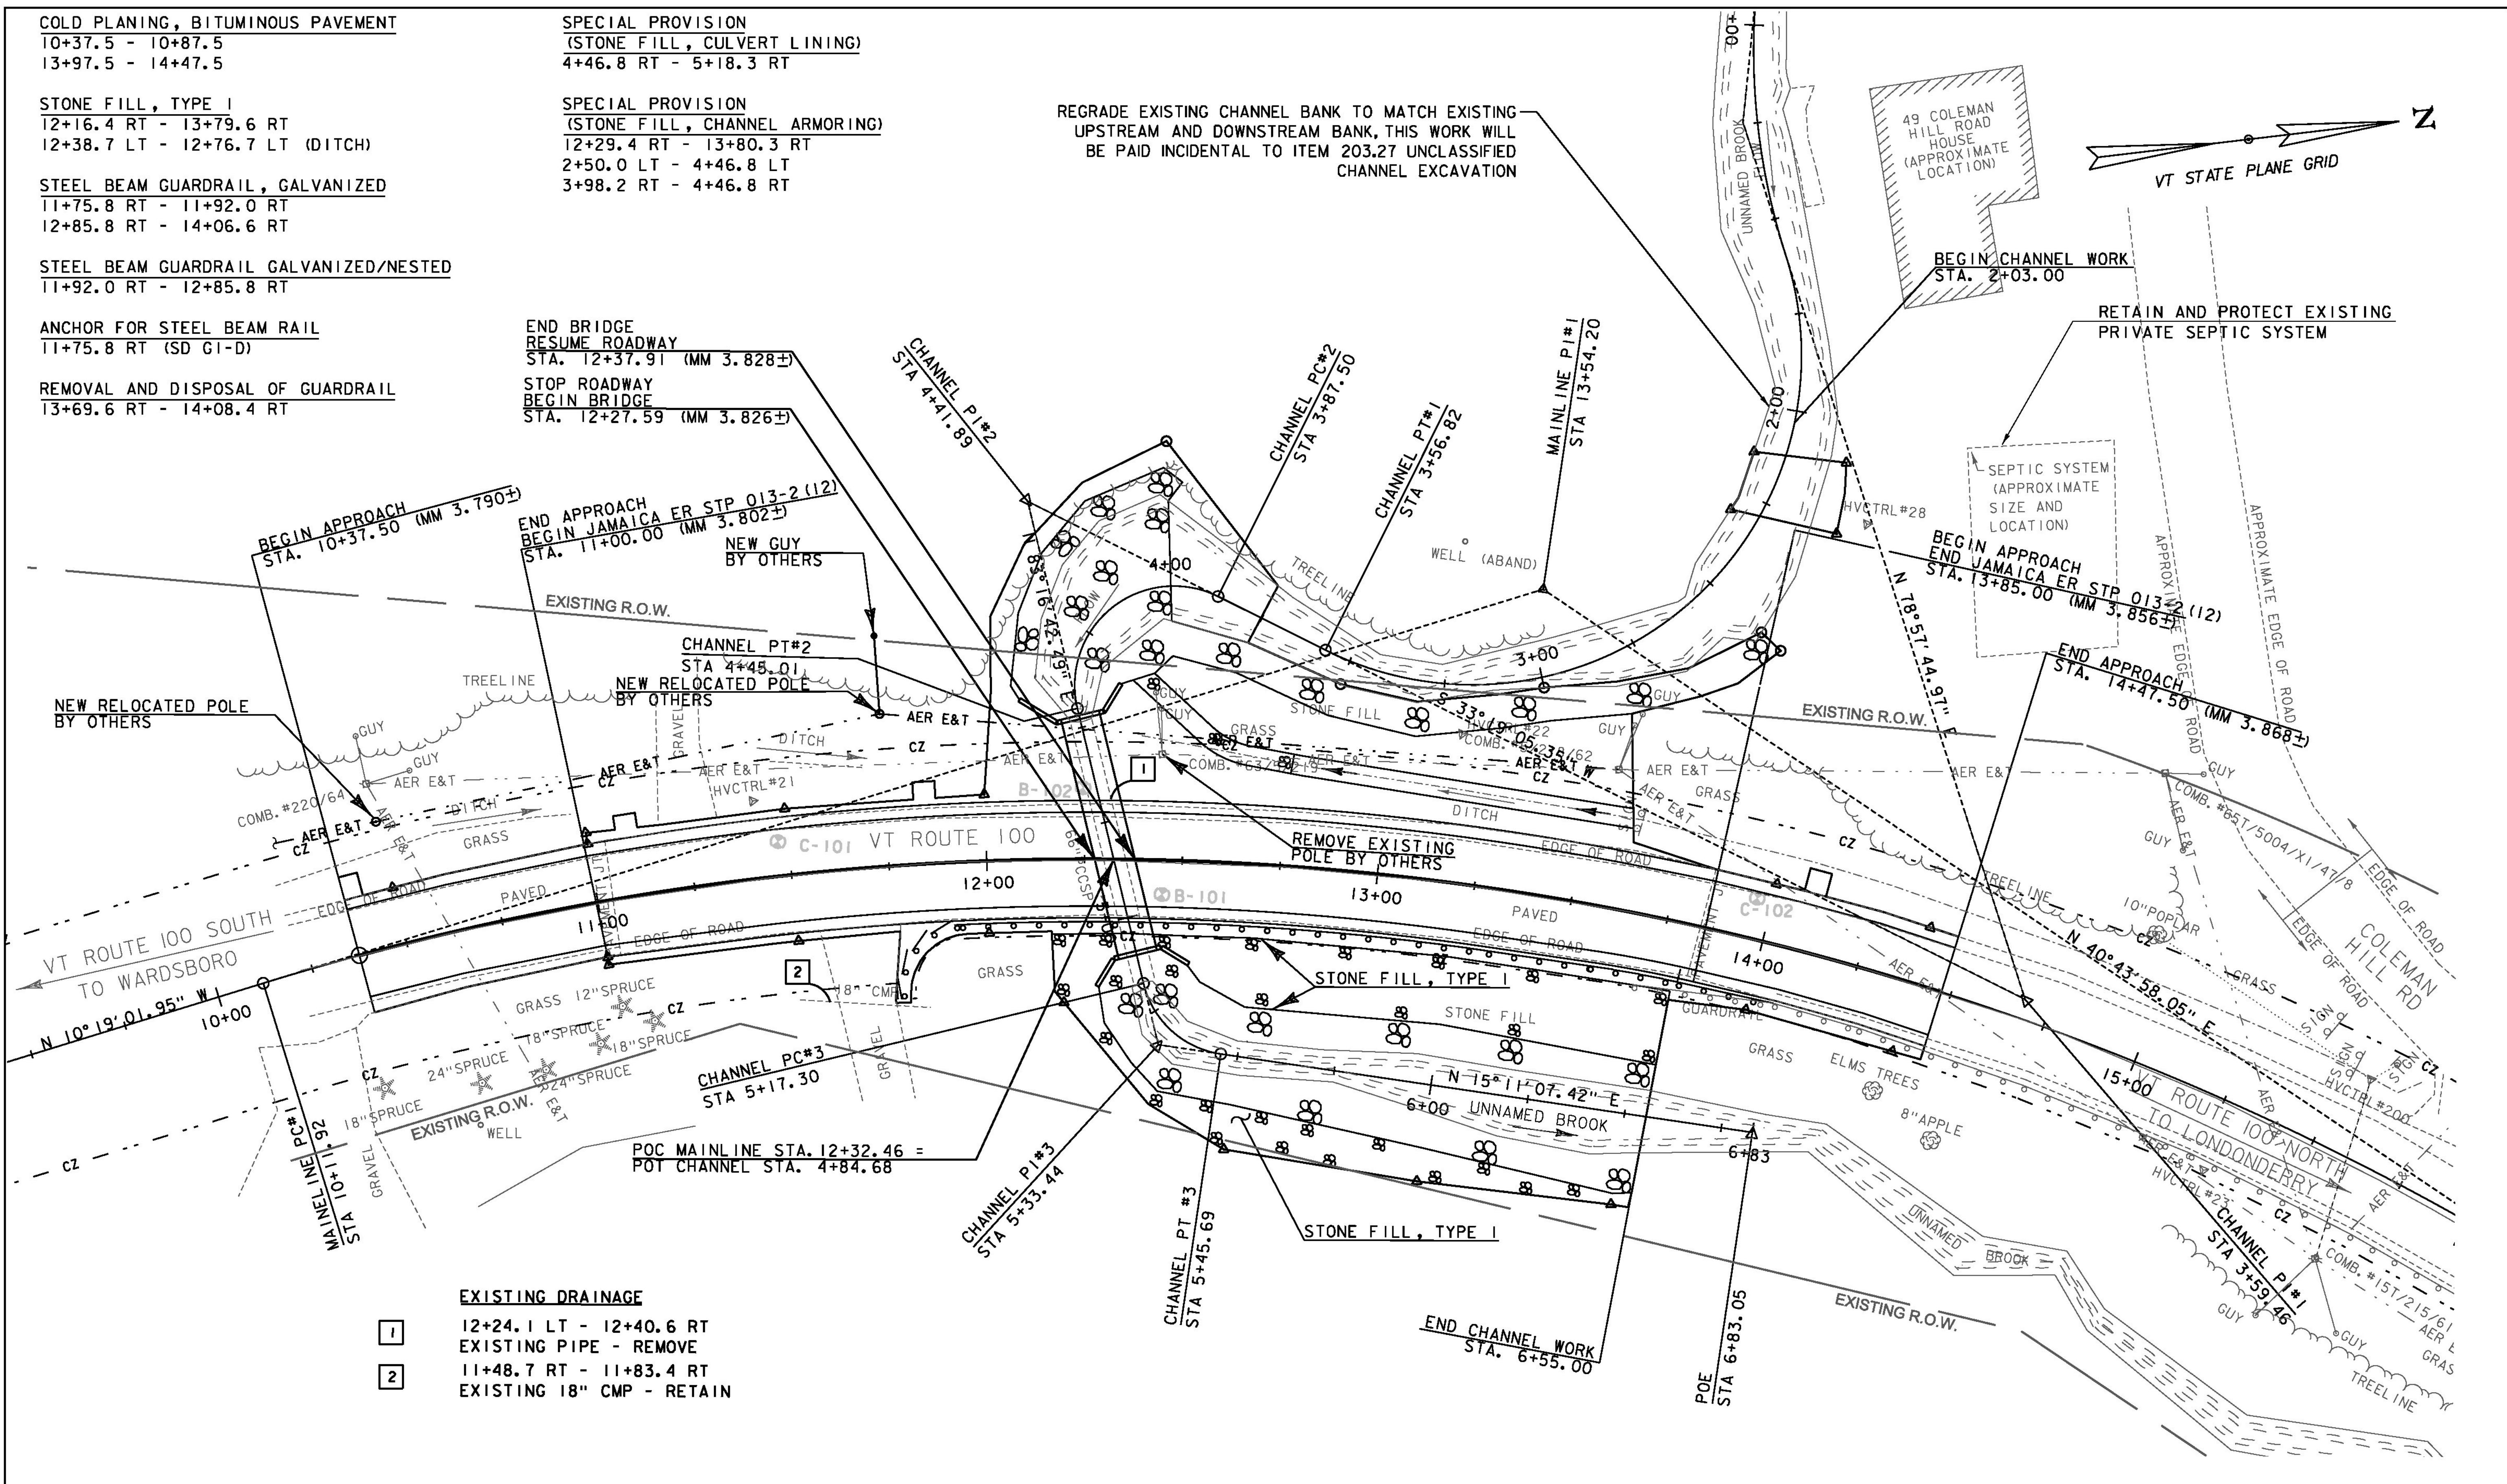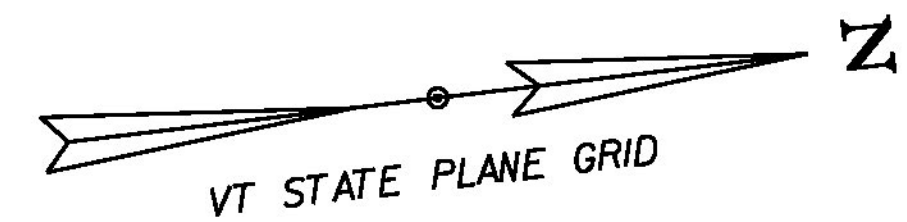

- EXISTING DRAINAGE**
- 1 12+24.1 LT - 12+40.6 RT
EXISTING PIPE - REMOVE
 - 2 11+48.7 RT - 11+83.4 RT
EXISTING 18" CMP - RETAIN



PROJECT NAME: JAMAICA
 PROJECT NUMBER: ER STP 013-2(12)
 FILE NAME: z12b474bdr.dgn
 PROJECT LEADER: E. ATKINS
 DESIGNED BY: M. BRADLEY
 PLAN SHEET

PLOT DATE: 02/27/2015
 DRAWN BY: M. BRADLEY
 CHECKED BY: E. ATKINS
 SHEET 18 OF 48

