LOCATION						MISC. ITEMS							REMARKS
SITE	STATION		STATION		POS.	605.10	*	*	204.20	204.21	*	619.17	* ITEMS TO BE PAID UNDER ITEM
						6 INCH	DRAINAGE	GEOTEXTILE	TRENCH	TRENCH	SUBBASE OF	YIELDING	605.10 "6 INCH UNDERDRAIN PIPE"
						UNDERDRAIN PIPE	AGGREGATE	FOR TRENCH	EXCAVATION	EXCAVATION	CRUSHED GRAVEL	MARKER POSTS	
									OF EARTH	OF ROCK	FINE GRADED		
SHARON						LF	CY	SY	CY	CY	TON	EA	
1		324+25		326+88	RT	263	104	419	88	16	69	2	
2		327+01		328+50	RT	149	59	237	50	9	39	2	
		SUBTOTAL				412	163	656	138	25	108	4	
		ROUNDING				38	-	-	-	15	-	-	
		TOTAL				450	163	656	**	40	**	**	** SEE QUANTITY SHEETS FOR
													TOTAL QUANTITIES

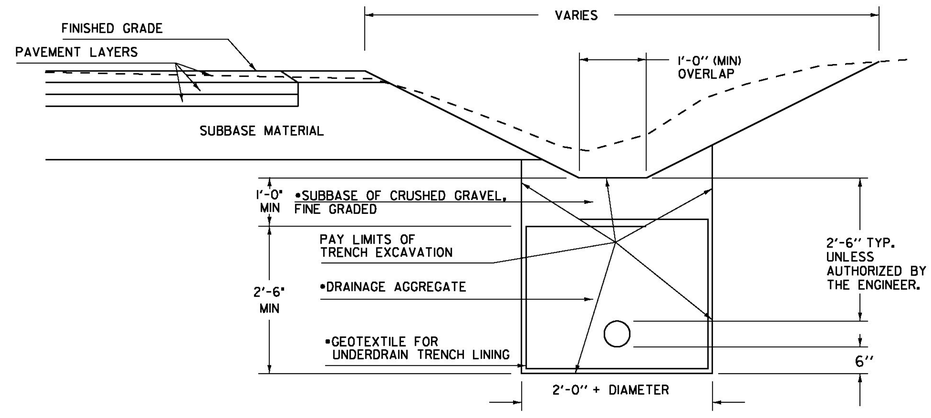

• MATERIALS AND INSTALLATION INCLUDED IN THE UNIT PRICE BID FOR CONTRACT ITEM 605.10.

UNDERDRAIN DETAIL

NOTES:

1. GEOTEXTILE FOR UNDERDRAIN TRENCH LINING SHALL NOT BE PLACED AROUND UNDERDRAIN WHEN COVER ABOVE UNDERDRAIN IS LESS THAN ONE FOOT.
2. THE END OF THE UNDERDRAIN PIPE AT THE BEGINNING OF ALL UNDERDRAIN RUNS SHALL BE WRAPPED IN GEOTEXTILE FABRIC. PAYMENT FOR THIS WORK IS INCLUDED IN THE UNIT PRICE BID FOR ITEM 605.10 "6 INCH UNDERDRAIN PIPE".

NOT TO SCALE

PROJECT NAME: SHARON
PROJECT NUMBER: ER STP 0147(20)

FILE NAME: z12c410.dgn
PROJECT LEADER: J. TUCKER
DESIGNED BY: B. BRESLEND
UNDERDRAIN DETAIL SHEET

PLOT DATE: 3/31/2015
DRAWN BY: B. MACK
CHECKED BY: A. SANZ
SHEET 11 OF 66