STATION	POSITION	TYPE	QUANTITY (SY)
MORETOWN			
1+80	LT	GRAVEL	17.3
14+45	RT	GRAVEL	9.7
		SUBTOTAL =	27.0
		ROUNDING =	3.0
		TOTAL =	30.0

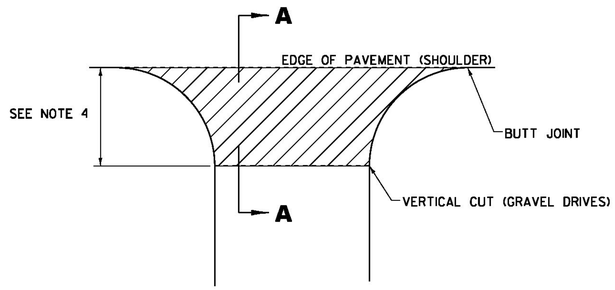

PLAN

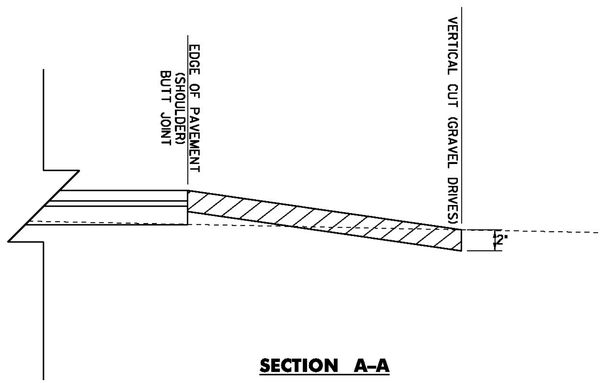

SECTION A-A

HANDWORK DETAILS FOR DRIVES - GRAVEL DRIVES

NOTES:

1. PAVING LIFT NOT TO EXCEED 2".

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 "SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)".

3. EXCAVATION OR FILL NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 "SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)".

4. FIELD DRIVES 2'-0"; RESIDENTIAL AND COMMERCIAL DRIVES 4'-0"; OR AS DIRECTED BY THE ENGINEER.

LEGEND

ITEM 900.675 "SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)"

DETAILS ARE NOT TO SCALE

PROJECT NAME: MORETOWN	
PROJECT NUMBER: ER STP 0167(15)	
FILE NAME: z12c524detail.dgn	PLOT DATE: 2/17/2015
PROJECT LEADER: J. TUCKER	DRAWN BY: B. MACK
DESIGNED BY: B. BRESLEND	CHECKED BY: A. SANZ
HANDWORK DETAILS FOR DRIVES	SHEET 11 OF 57