


646.602 TEMPORARY 4 INCH WHITE LINE, PAINT  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR STATE HIGHWAYS)  
 ADDISON:  
 STA 133+50.00 - STA 137+50.00 LT & RT  
 STA V 11+50.00 - STA V 13+70.00 LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT  
 (ALL LINES WILL INCLUDE C/L BREAKS FOR STATE HIGHWAYS) S=SOLID, D=DASHED  
 ADDISON:  
 STA 133+50.00 - STA 137+50.00 S - S  
 STA V 11+50.00 - STA V 13+70.00 S - S



646.682 TEMPORARY 24 INCH STOP BAR, PAINT  
 ADDISON:  
 STA V 13+70.00 RT  
 646.692 TEMPORARY LETTER OR SYMBOL, PAINT  
 ADDISON:  
 STA V 13+62.00 RT, "S,T,O,P" (4 EA)

675.50 REMOVING SIGNS  
 AS SHOWN - 30  
 675.60 ERECTING SALVAGED SIGNS  
 AS SHOWN - 3

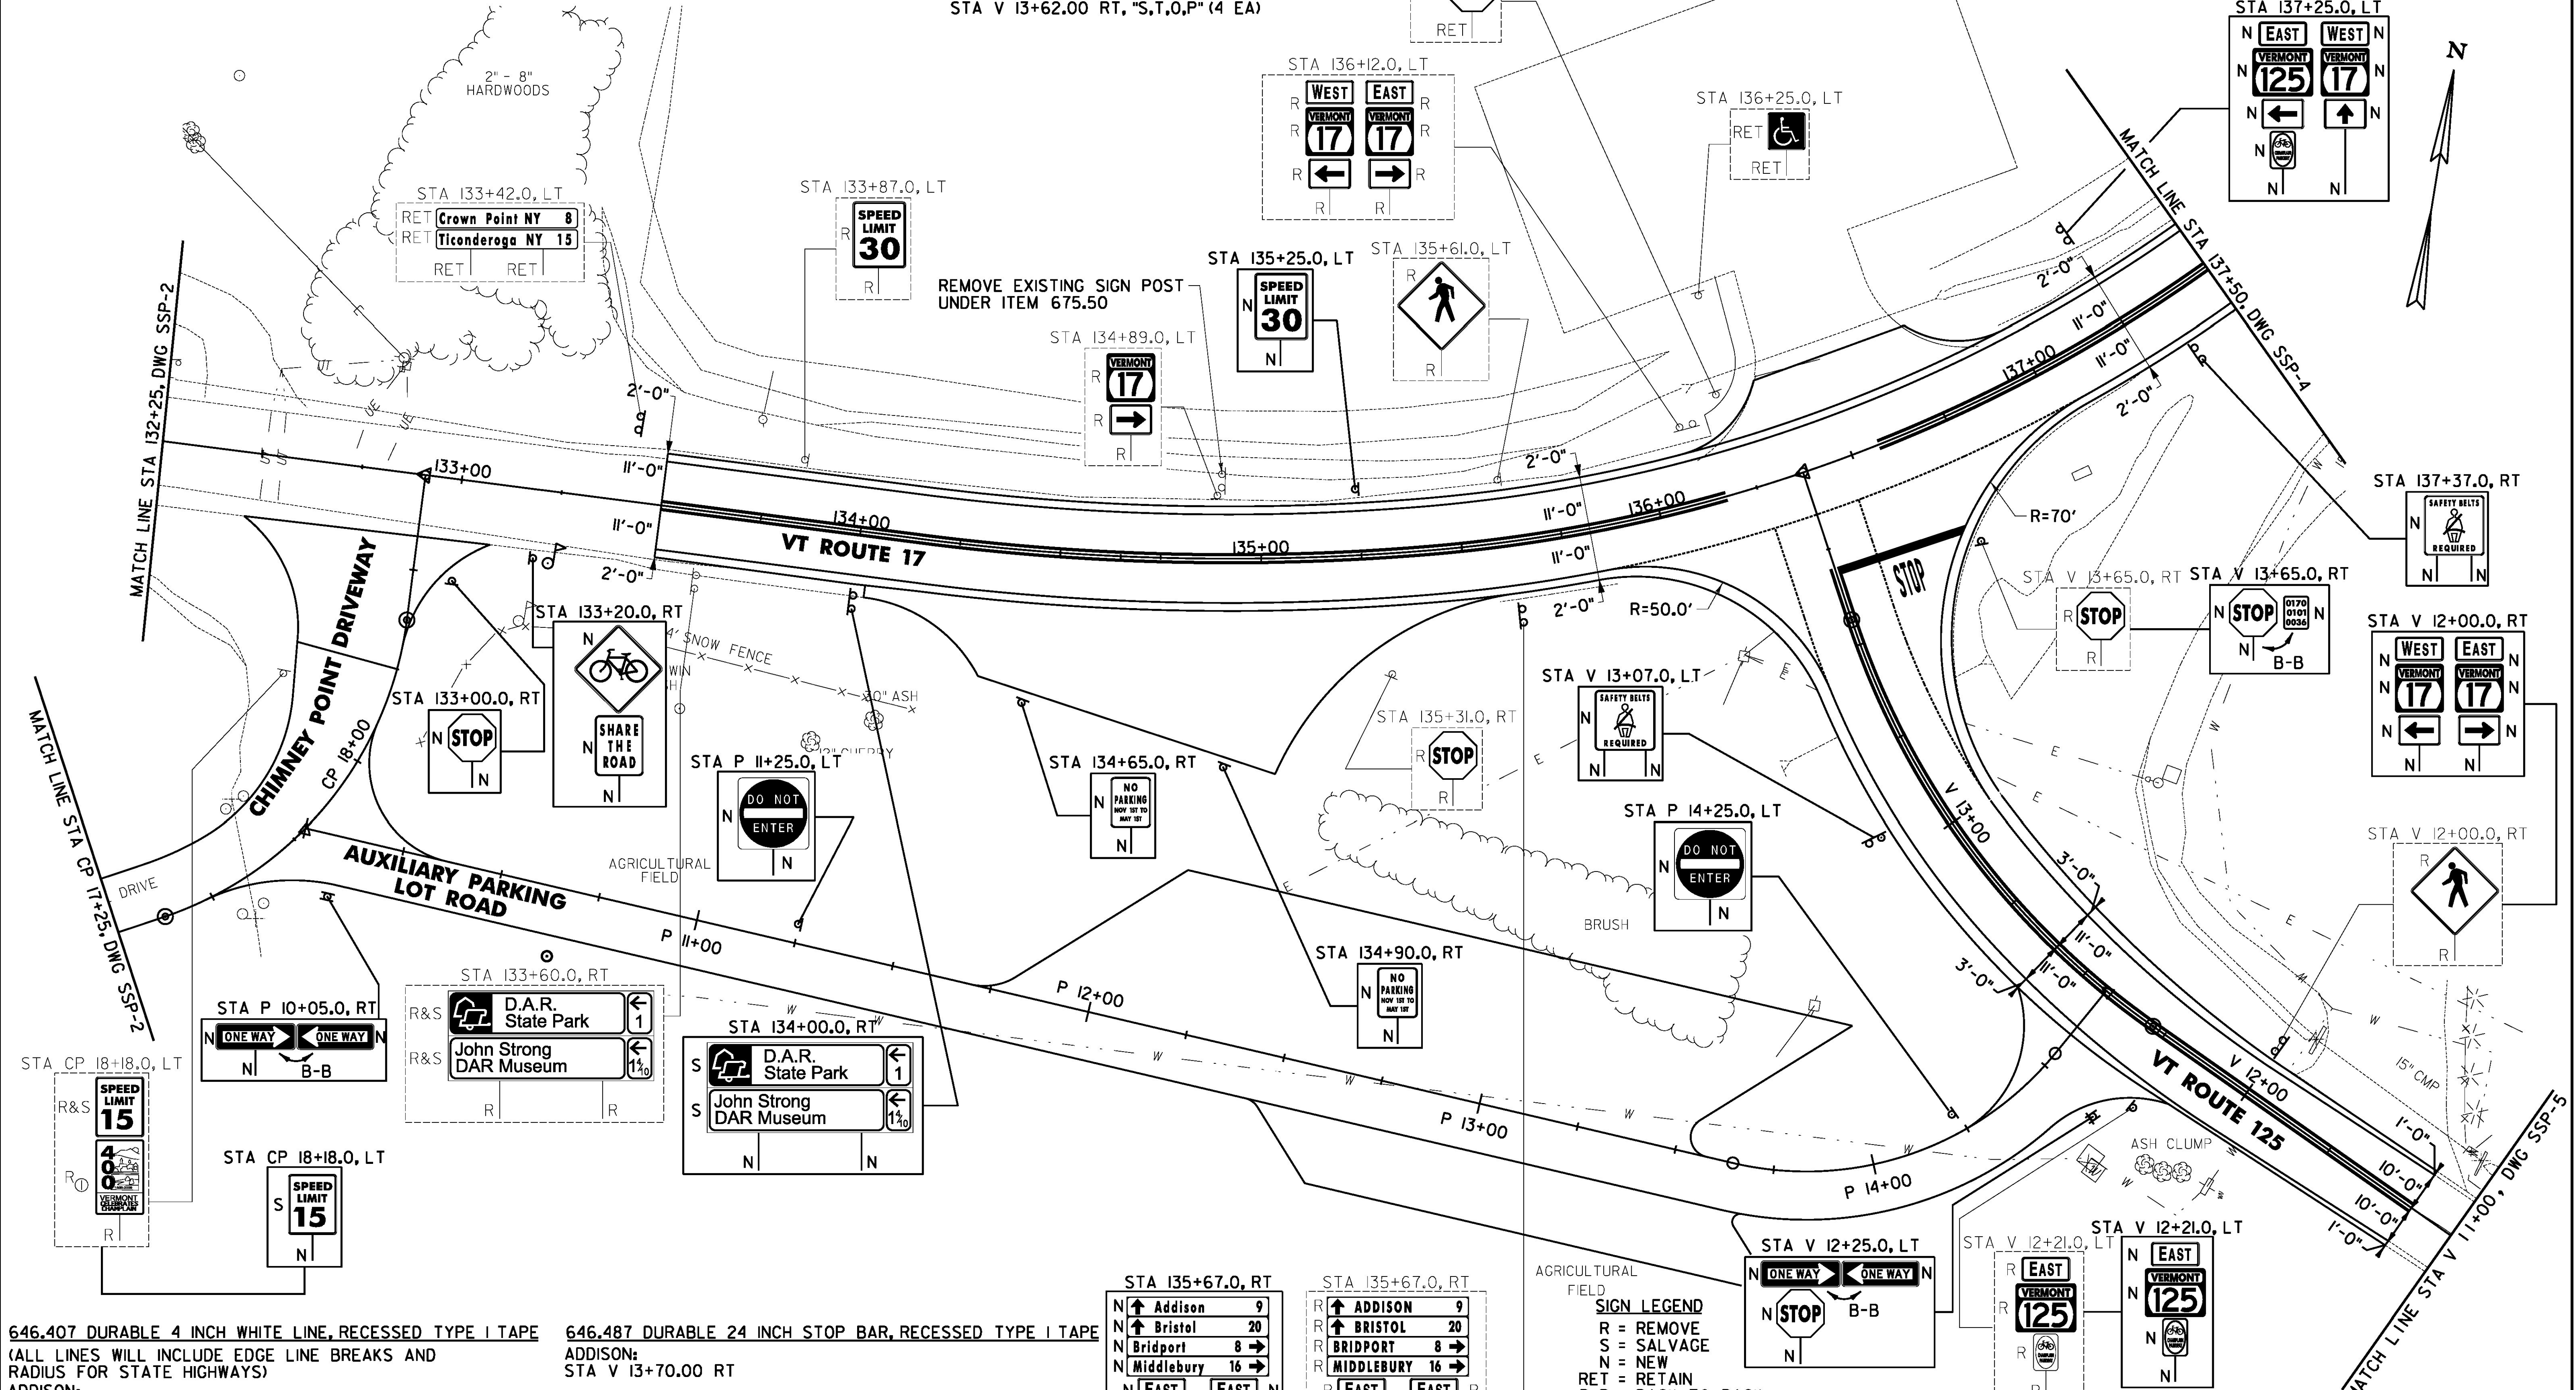

646.407 DURABLE 4 INCH WHITE LINE, RECESSED TYPE I TAPE  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR STATE HIGHWAYS)  
 ADDISON:  
 STA 133+50.00 - STA 137+50.00 LT & RT  
 STA V 11+50.00 - STA V 13+70.00 LT & RT  
 646.417 DURABLE 4 INCH YELLOW LINE, RECESSED TYPE I TAPE  
 (ALL LINES WILL INCLUDE C/L BREAKS FOR STATE HIGHWAYS) S=SOLID, D=DASHED  
 ADDISON:  
 STA 133+50.00 - STA 137+50.00 S - S  
 STA V 11+50.00 - STA V 13+70.00 S - S

646.487 DURABLE 24 INCH STOP BAR, RECESSED TYPE I TAPE  
 ADDISON:  
 STA V 13+70.00 RT  
 646.493 DURABLE LETTER OR SYMBOL, EPOXY PAINT  
 ADDISON:  
 STA V 13+62.00 RT, "S,T,O,P" (4 EA)

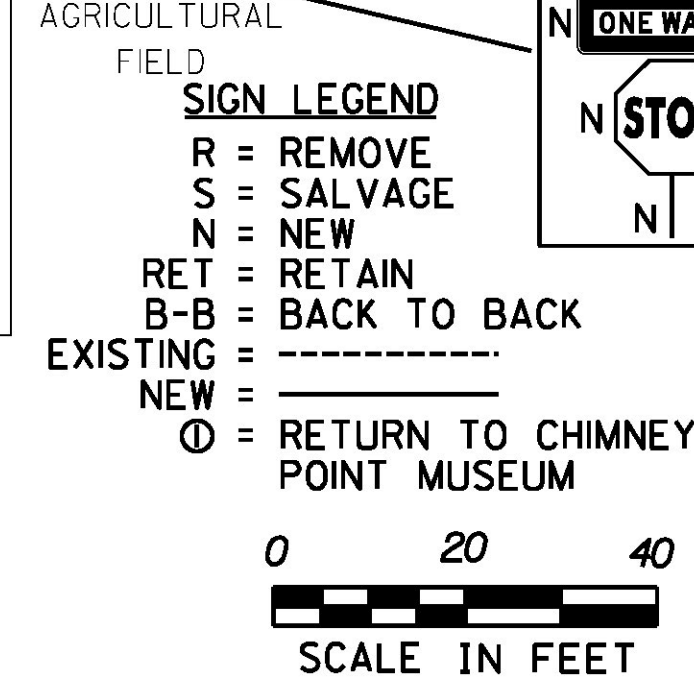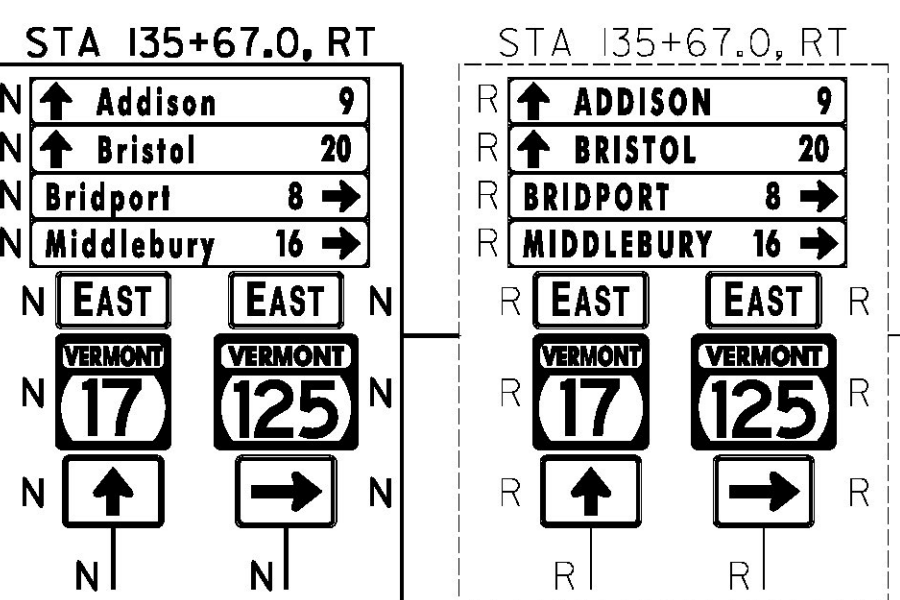

**SIGNING AND STRIPING SHEET #3**

PROJECT NAME: LAKE CHAMPLAIN SITE RESTORATION  
 PROJECT NUMBER: STP 032-118)  
 FILE NAME: z12E008\_ssp\_03.dgn  
 PROJECT LEADER: D.E.G.  
 DESIGNED BY: B.T.H.  
 DWG. NO.: SSP-3

PLOT DATE: 7/12/2012  
 DRAWN BY: W.G.P.  
 CHECKED BY: D.E.G.  
 SHEET 51 OF 100

FILE NAME: I:\A\2012\30\CA\ADD\MST\12\2012\2012\2012\_ssp\_03.dgn  
 DATE/TIME: 7/12/2012 10:46:56  
 USER: 4666