



LEGEND

- CONTOUR - 10 FT INTERVAL
- CONTOUR - 2 FT INTERVAL
- - - EDGE OF EXISTING PARKING / ROAD
- WETLAND BOUNDARY LINE
- ORDINARY HIGH WATER (O.H.W.) ELEV. 98'
- ORDINARY LOW WATER (O.L.W.) ELEV. 93'
- EXISTING TREES, WOODS BOUNDARY
- APPROX. PROPERTY BOUNDARY
- EDGE OF PROPOSED RAMP
- APPROX. LIMITS OF EXCAVATION
- SILT CURTAIN
- SURVEY STATION (DO NOT DISTURB)
- TBM (DO NOT DISTURB)

PROFILE ALIGNMENT R
SCALE: 1"=10'




NOTE: VAOT PAY ITEM 203.15, COMMON EXCAVATION, 3000 C.Y. PAYMENT SHALL BE FOR THE REMOVAL OF THE HAUL ROAD, AND SHALL INCLUDE DISPOSAL. ALL WORK UNDER THIS PAY ITEM SHALL BE IN COMPLIANCE WITH ALL ASSOCIATED VAOT SPECIFICATIONS.

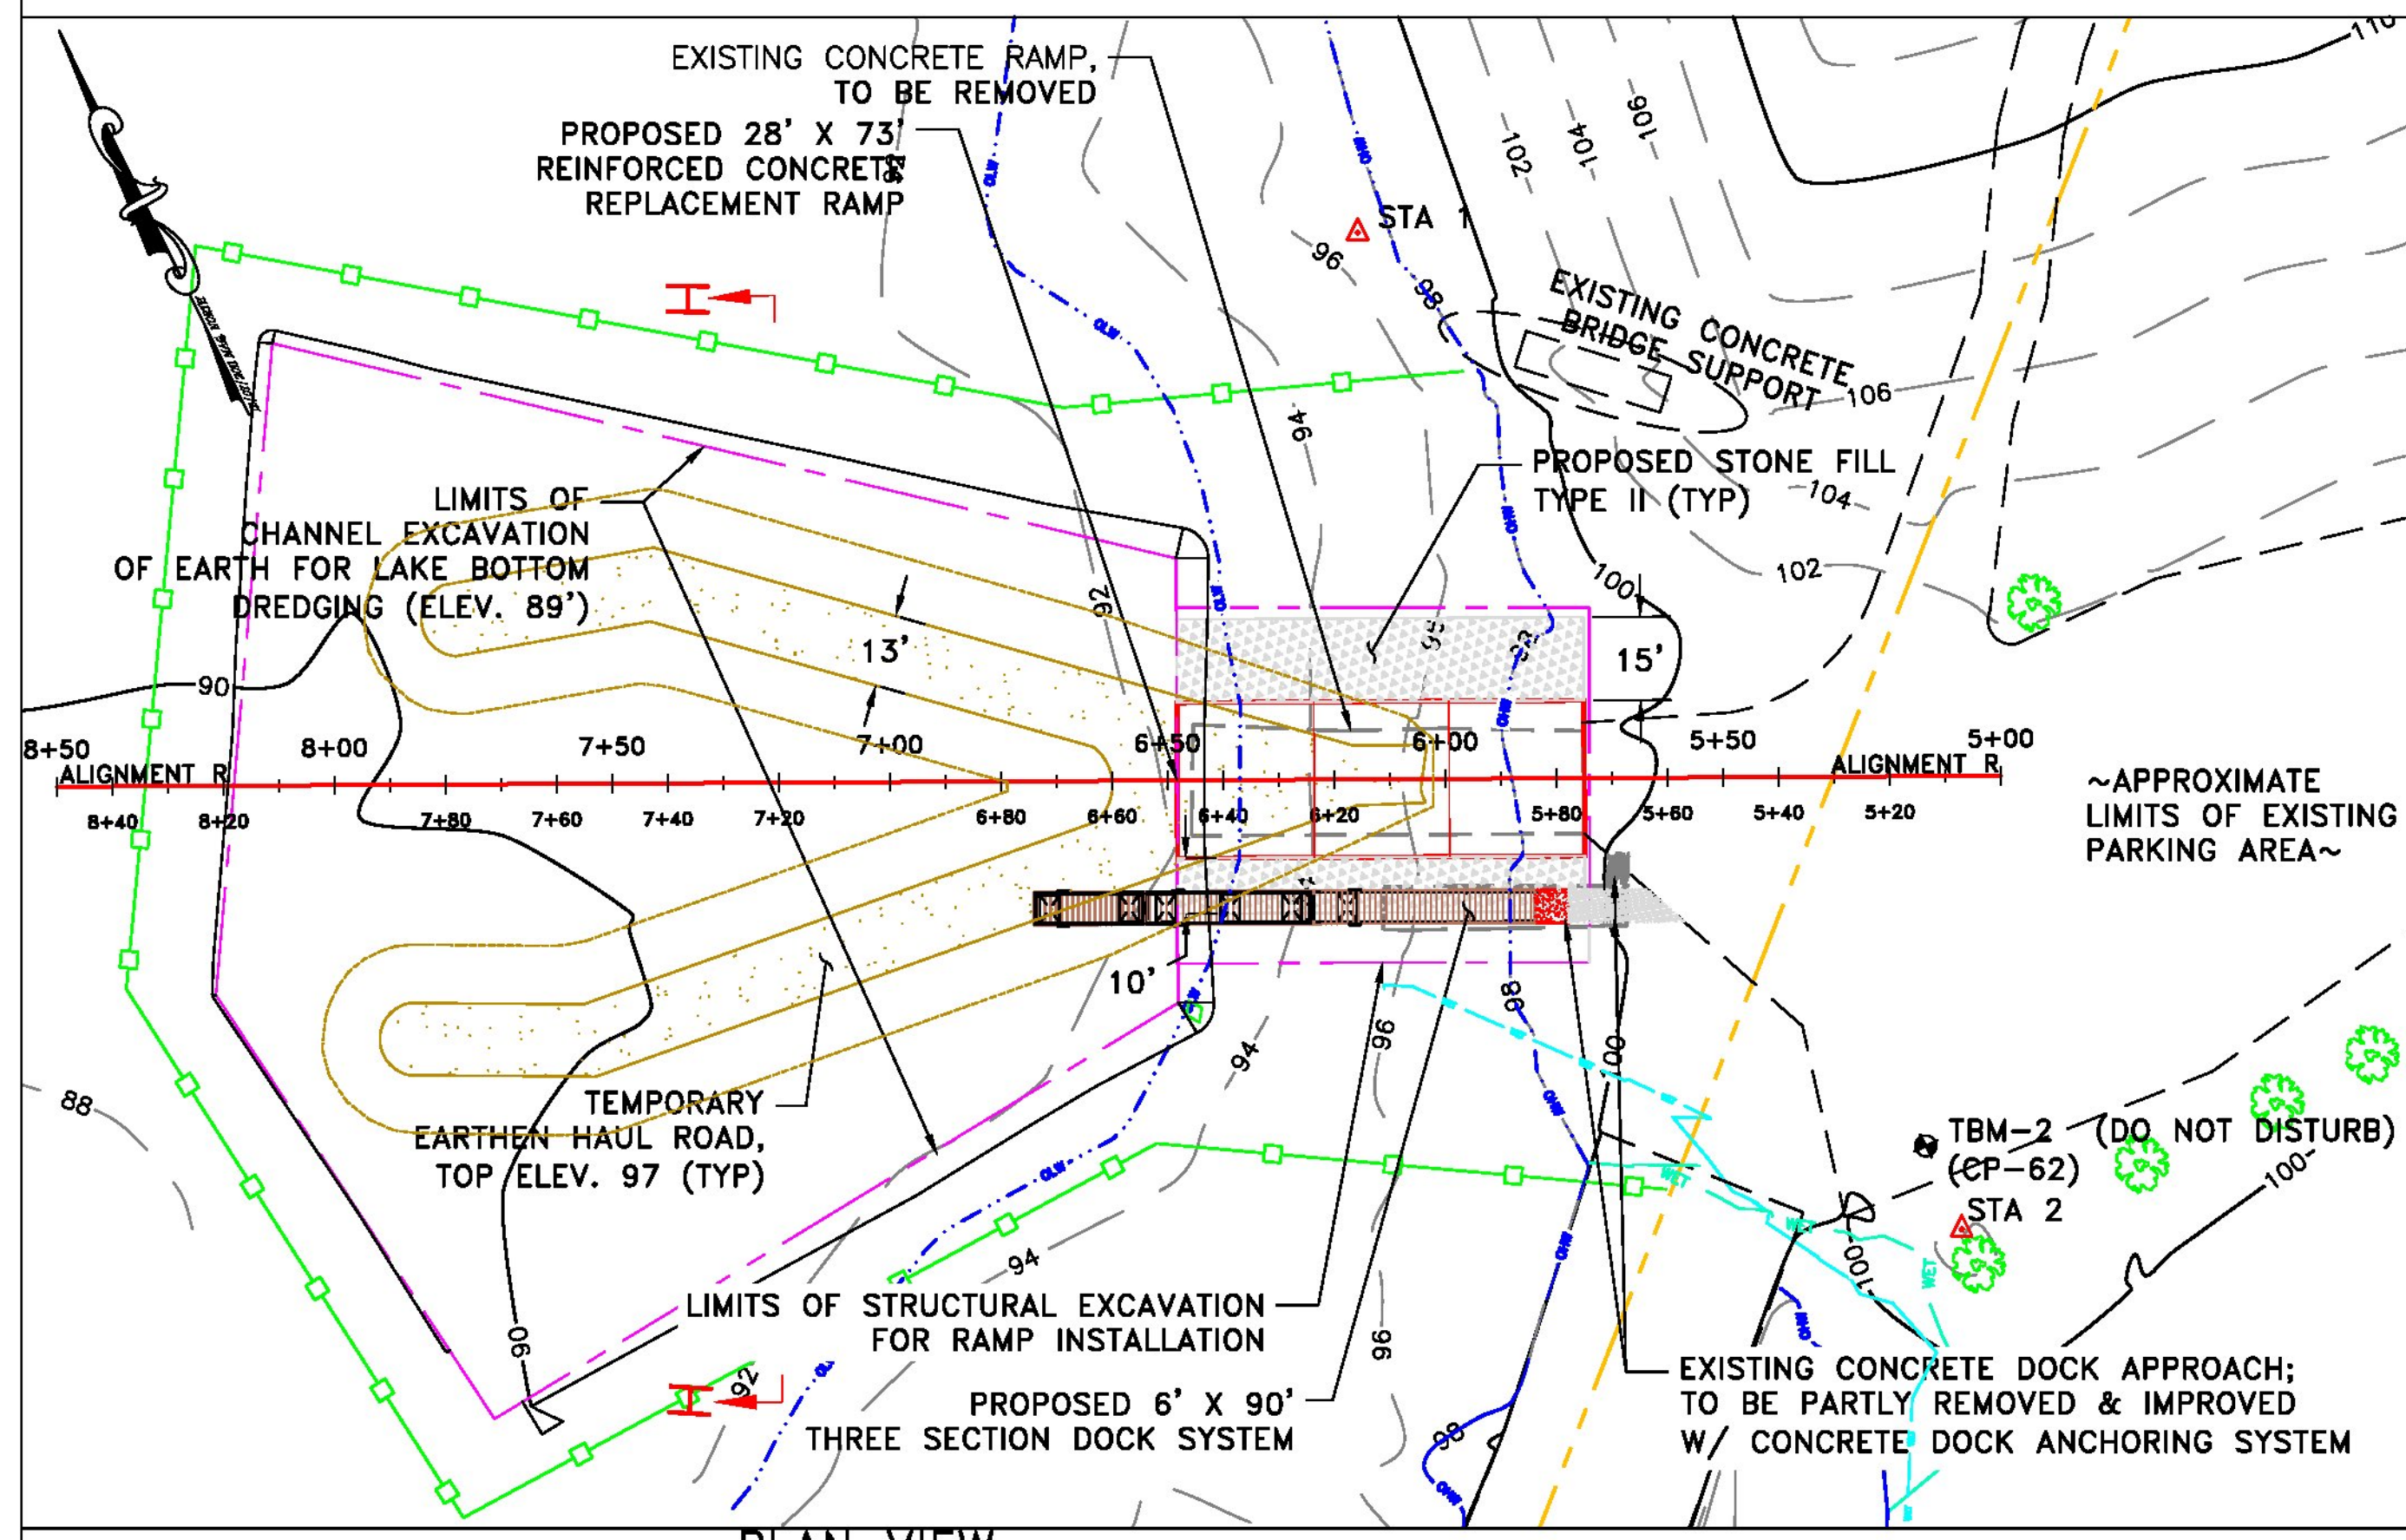

PLAN VIEW PROPOSED RAMP IMPROVEMENTS
SCALE: 1" = 30'




~APPROXIMATE LIMITS OF EXISTING PARKING AREA~

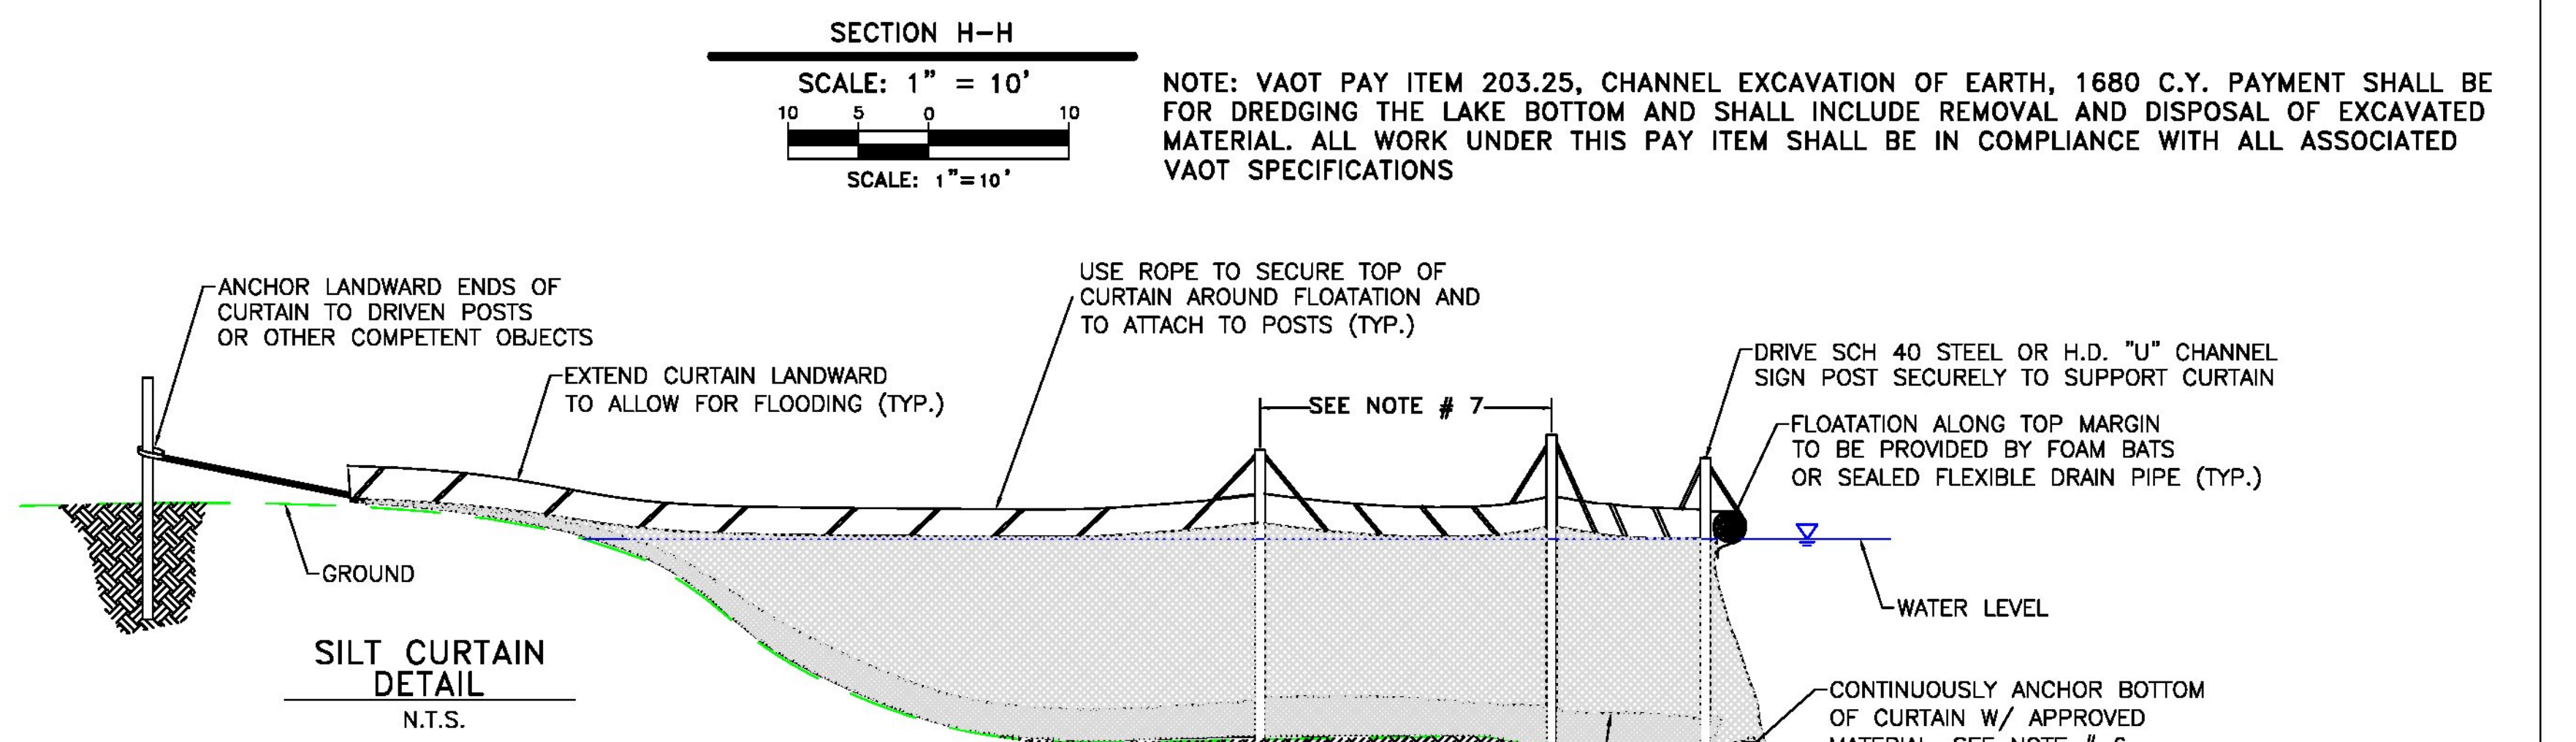

SECTION H-H
SCALE: 1" = 10'

NOTE: VAOT PAY ITEM 203.25, CHANNEL EXCAVATION OF EARTH, 1680 C.Y. PAYMENT SHALL BE FOR DREDGING OF THE LAKE BOTTOM AND SHALL INCLUDE REMOVAL AND DISPOSAL OF EXCAVATED MATERIAL. ALL WORK UNDER THIS PAY ITEM SHALL BE IN COMPLIANCE WITH ALL ASSOCIATED VAOT SPECIFICATIONS

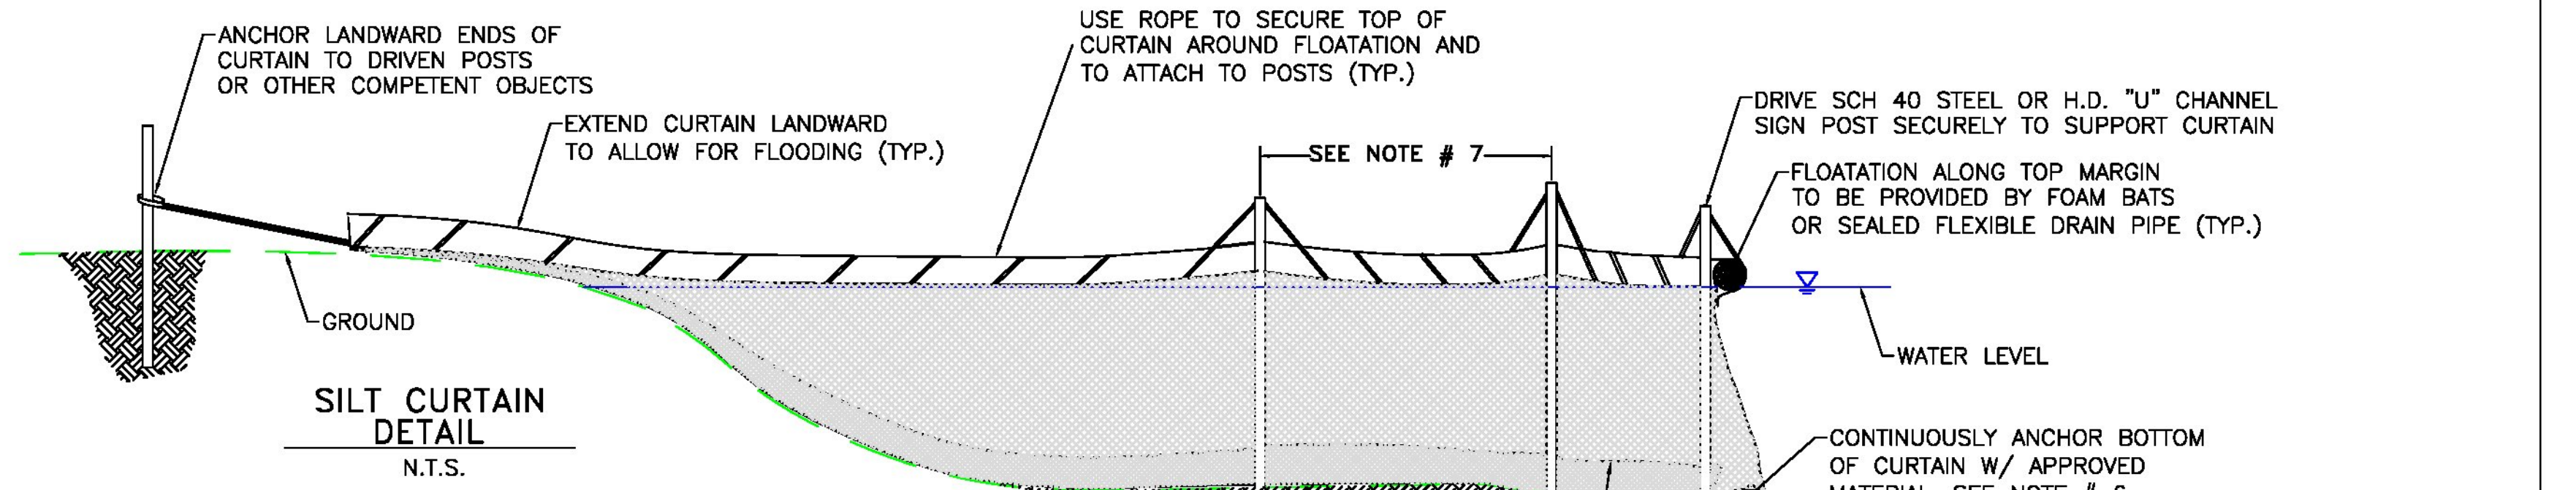

- NOTES:
- Silt curtain shall be constructed and completely installed prior to any work in the water.
 - Placement of silt curtain shall allow a minimum of 10 feet between limit of excavation and curtain to prevent disturbance of curtain during work.
 - Prior to work in the water, the silt curtain shall be inspected and approved by the Engineer.
 - When joining two pieces of filter fabric, overlap shall be at least 12 inches. Method of splicing shall be hand stitching, double row.
 - Continuous floatation along the top margin shall be provided by closed cell foam bats or flexible corrugated drain pipe sealed airtight, sized to account for wave and or current action.
 - Continuous sealing along the bottom margin shall be achieved by leaving excess fabric to be anchored with chain, short pieces of steel rod, cable and native material, as shown in the drawing. All non-native materials used for anchoring shall be completely removed after completion of the work.
 - The spacing of steel posts shall provide additional vertical and horizontal support to the curtain to accommodate for the forces of wind, wave and current.
 - After completion of the work in the water, the silt curtain shall remain in place until turbidity inside the curtain is equal to that outside.
 - VAOT pay item 649.61 geotextile for filter curtain, 800 s.y. Payment for this item shall be for the silt curtain complete in place and including all incidentals and removal. All work under this item shall be in conformance with all associated VAOT specifications.



STATE OF VERMONT AGENCY OF NATURAL RESOURCES DEPARTMENT OF ENVIRONMENTAL CONSERVATION FACILITIES ENGINEERING DIVISION WATERBURY, VERMONT 05671-0511		DESIGNED JRO
REVISIONS	DEPARTMENT FISH & WILDLIFE	DRAWN BP/JR
1. SET CURTAIN DETAIL, N.T.S. 5/7/12	PROJECT CHIMNEY POINT ACCESS AREA RAMP PROFILE PLAN VIEW OF HAUL ROAD & CROSS SECTION H-H AT STA R7+20	CHECKED JJB
	LOCATION ADDISON, VERMONT	SHEET 8B OF 100
	SCALE	DRAWING NO. 12711CP
RECOMMENDED	APPROVED	SCALE AS NOTED