

POTENTIAL ACTIVITIES ASSOCIATED WITH CONSTRUCTION PHASING

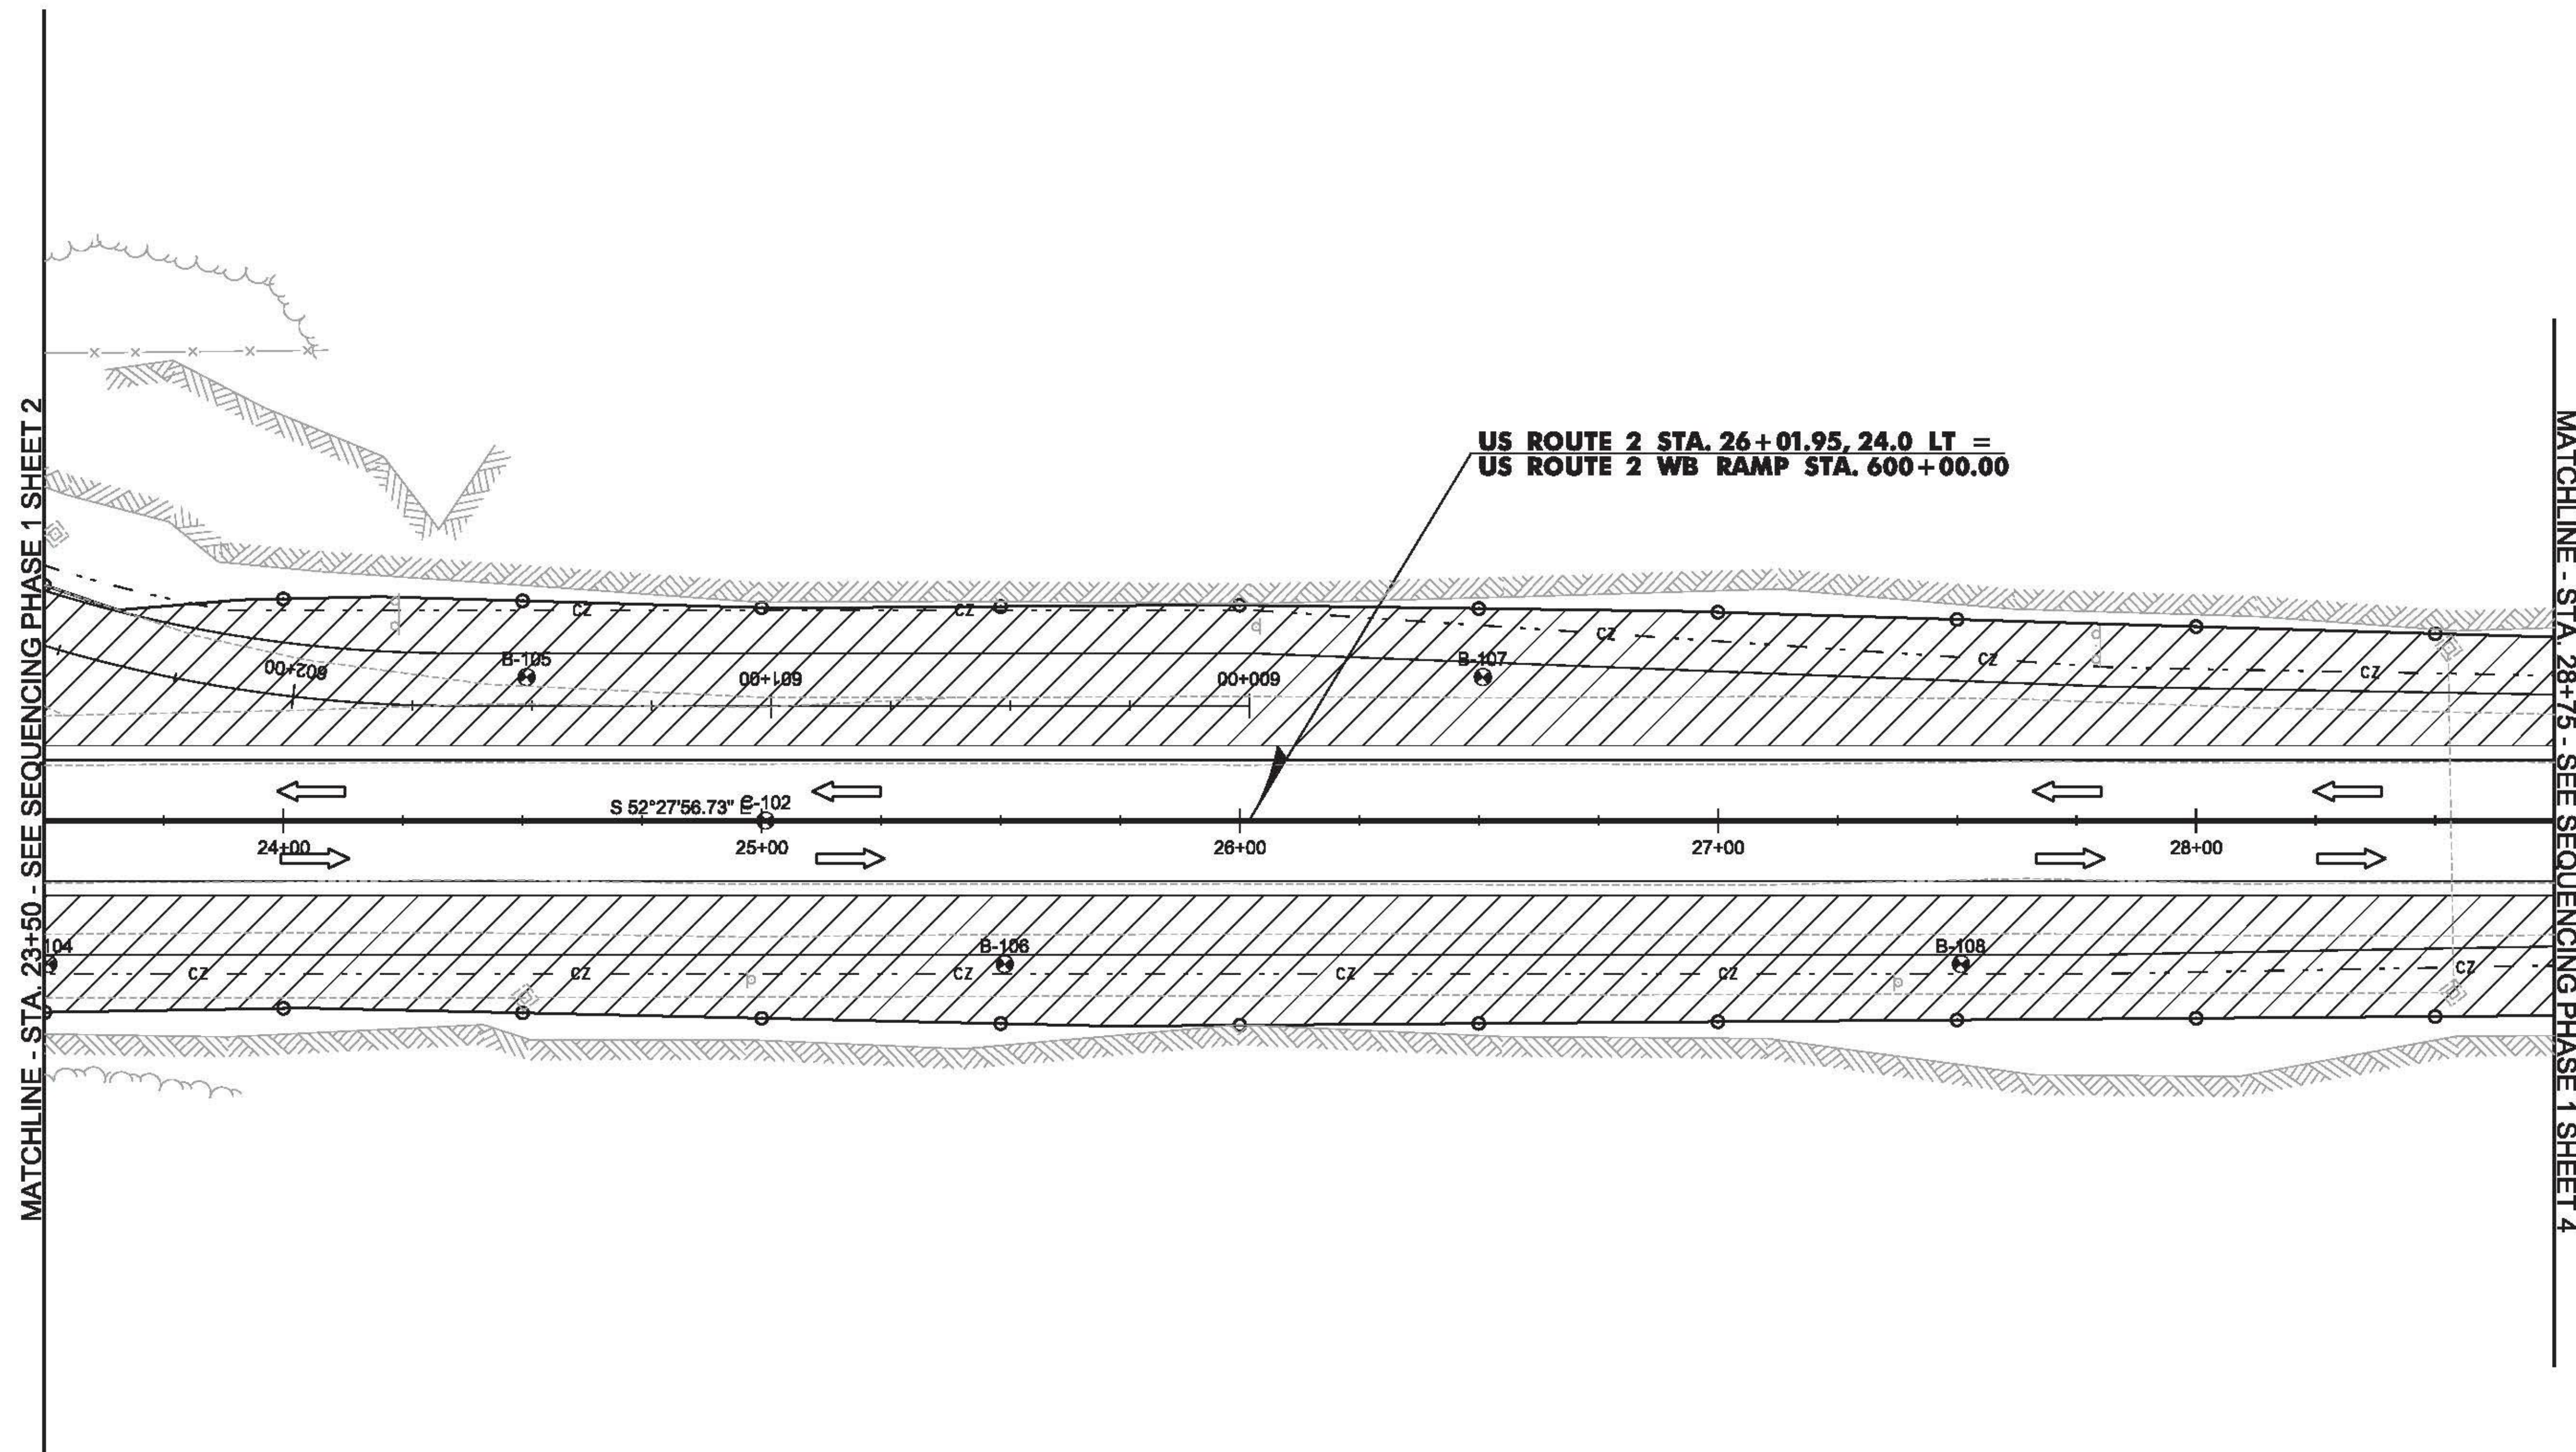
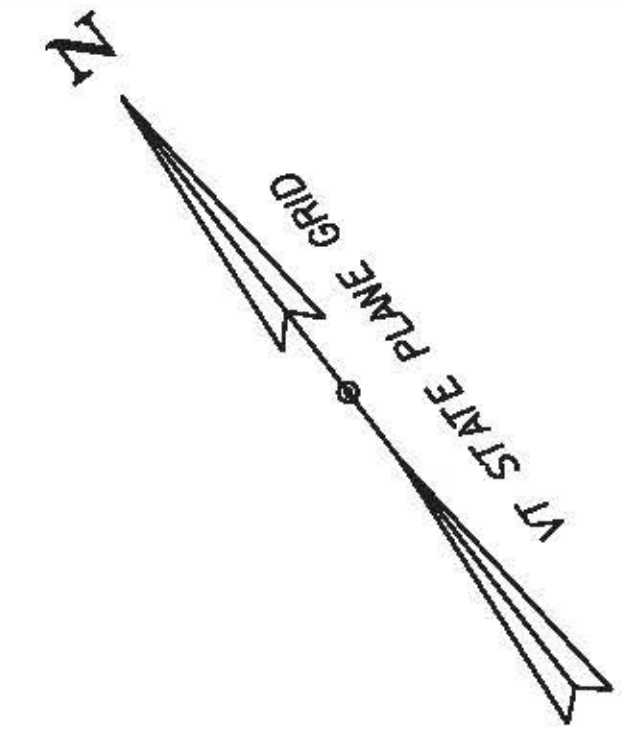
1. ALLOW TRAFFIC FLOW THROUGH ON THE EXISTING US ROUTE 2 LANES.
2. BEGIN WIDENING WORK ALONG US ROUTE 2.

NOTES:




1. FOR TRAFFIC CONTROL GENERAL NOTES, SEE TRAFFIC CONTROL GENERAL NOTES AND DETAIL SHEET.
2. TEMPORARY LANE OR SHOULDER CLOSURES SHALL BE ALLOWED DURING WORKING HOURS, US ROUTE 2 AND CLAY POINT ROAD SHALL BE RESTORED TO TWO-WAY TRAFFIC AT THE CLOSE OF DAILY CONSTRUCTION ACTIVITIES.

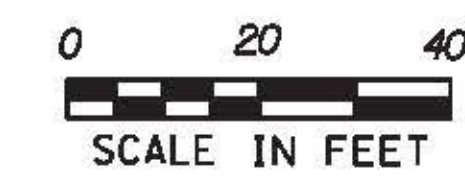
TEMPORARY 4 INCH WHITE LINE
 STA. 23+50.00, LT - STA. 28+75.00, LT (525')
 STA. 23+50.00, RT - STA. 28+75.00, RT (525')

TEMPORARY 4 INCH YELLOW LINE
 STA. 23+50.00, CL - STA. 28+75.00, CL (1050')



LEGEND

-  CONSTRUCTION AREA
-  REFLECTORIZED PLASTIC DRUM
-  FLOW OF TRAFFIC



PROJECT NAME: COLCHESTER
 PROJECT NUMBER: HES 028-I(28)

FILE NAME: t13b028+cp.dgn
 PROJECT LEADER: P. COBURN
 DESIGNED BY: M. BOGACZYK
 CONSTRUCTION SEQUENCING PHASE 1 SHEET 3 SHEET 74 OF 91

PLOT DATE: 12/15/2015
 DRAWN BY: M. BOGACZYK
 CHECKED BY: M. LACROIX