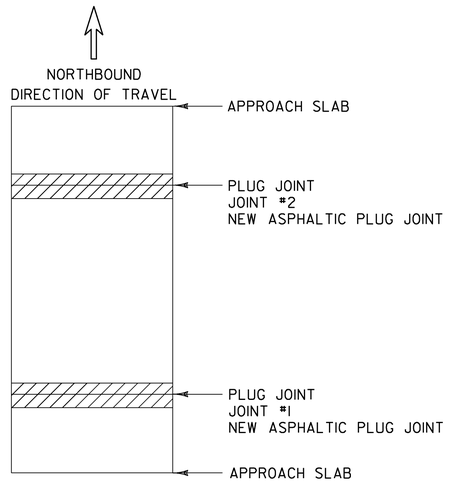

BRIDGE 186

MM 7.104 IN WAITSFIELD
LENGTH OF ASPHALTIC PLUG JOINTS:
JOINT #1 - 27.5'
JOINT #2 - 27.5'

TOTAL = 55.0'

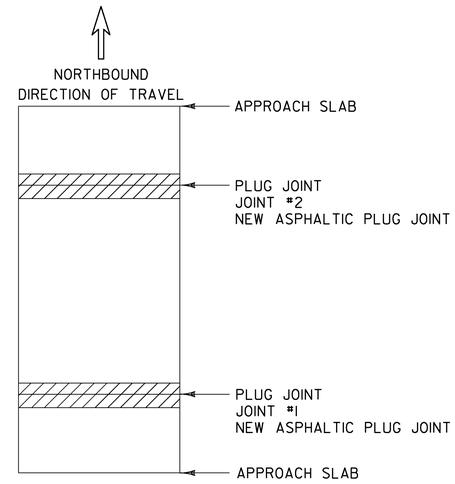

BRIDGE 187

MM 0.154 IN DUXBURY
LENGTH OF ASPHALTIC PLUG JOINTS:
JOINT #1 - 20.0'
JOINT #2 - 20.0'

TOTAL = 40.0'

NOTES:

1. SEE STRUCTURES DETAIL SD-516.10, BRIDGE JOINT ASPHALTIC PLUG FOR NOTES AND DETAILS.
2. INSTALL ASPHALTIC PLUG JOINT AT VT. RTE. 17 STA. 507+31.5 BRIDGE #38.
3. BRIDGES WITHIN THE PROJECT LIMITS ARE:

BRIDGE NUMBER 179, MM 3.389 (WAITSFIELD) 60" CGMPAC W
BRIDGE NUMBER 180, MM 4.742 (WAITSFIELD) 4' X 5' CONCRETE BOX (COLD PLANE AND PAVE)
BRIDGE NUMBER 181, MM 4.903 (WAITSFIELD) 23' X 3.5' CONCRETE SLAB (COLD PLANE AND PAVE)
BRIDGE NUMBER 182, MM 5.083 (WAITSFIELD) 4' X 4' CONCRETE BOX W (COLD PLANE AND PAVE)
BRIDGE NUMBER 183, MM 5.260 (WAITSFIELD) 4' X 5' CONCRETE BOX (CATTLEPASS) (COLD PLANE AND PAVE)
BRIDGE NUMBER 184, MM 5.359 (WAITSFIELD) 4' X 5' CONCRETE BOX W (CATTLEPASS) (COLD PLANE AND PAVE)
BRIDGE NUMBER 185, MM 5.794 (WAITSFIELD) 6' X 6' CONCRETE BOX W (COLD PLANE AND PAVE)
BRIDGE NUMBER 186, MM 7.104 (WAITSFIELD) 80' X 9' CONCRETE I-BEAM (COLD PLANE AND PAVE)
BRIDGE NUMBER 187, MM 0.154 (DUXBURY) 58' X 17' CONCRETE I-BEAM
BRIDGE NUMBER 188, MM 1.611 (DUXBURY) 50" X 30" ACCGMP ARCH
BRIDGE NUMBER 189, MM 1.665 (DUXBURY) 60" RCP
BRIDGE NUMBER 190, MM 2.602 (DUXBURY) 8'-7" X 5'-11" CGMPP ARCH
BRIDGE NUMBER 191, MM 3.932 (DUXBURY) 48" ACCGMP
BRIDGE NUMBER 192, MM 4.361 (DUXBURY) 72" ACCGMP
BRIDGE NUMBER 193, MM 5.571 (DUXBURY) 15'-10" X 10'-8" CGMPLP ARCH
BRIDGE NUMBER 194, MM 6.216 (DUXBURY) 20' X 10' REINFORCED CONCRETE BOX

LEGEND

EXISTING BRIDGE JOINTS TO BE REPAIRED WITH ASPHALTIC PLUG JOINT

BRIDGE JOINT DETAIL SHEET	PROJECT NAME: WAITSFIELD-MORETOWN PROJECT NUMBER: STP SURF (39)	
	FILE NAME: p13b168.dgn PROJECT LEADER: M. FOWLER DESIGNED BY: L. BULLOCK IPARM FILE NAME: p13b168bjd.i	PLOT DATE: 06-MAY-2014 DRAWN BY: L. BULLOCK CHECKED BY: PAVT MGMT SHEET 24 OF 26