




1.500" Radius, 0.375" Border, White on Green;
 [Enosburg Falls] B; [6] C; Standard Arrow Custom 9.000" X 6.125" 0";

ALL SIGNS IN THIS SECTION ARE SIGN CODE VDI-1a



1.500" Radius, 0.375" Border, White on Green;
 Standard Arrow Custom 9.000" X 6.125" 180"; [Frelighsburg, Que.] B 80% spacing;

ALL SIGNS IN THIS SECTION ARE SIGN CODE VDI-1

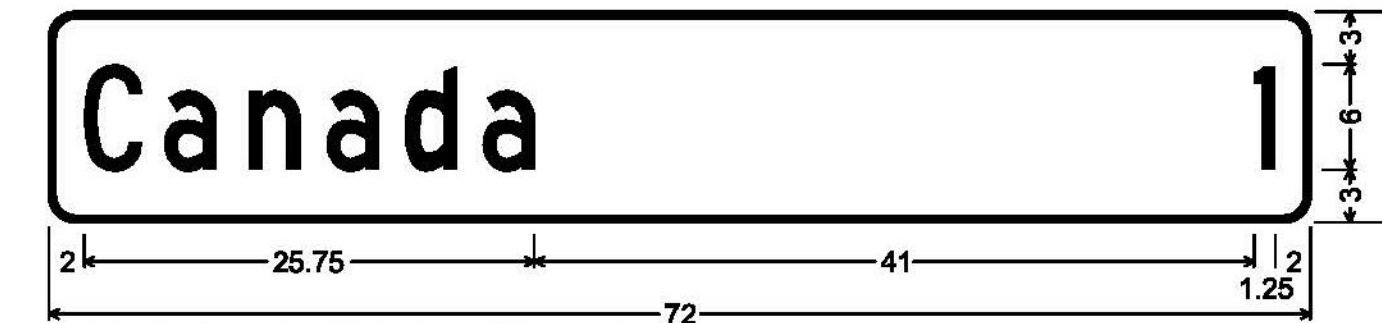

1.500" Radius, 0.375" Border, White on Green;
 [Canada] C; [1] C;



1.500" Radius, 0.375" Border, White on Green;
 [Enosburg] C [Falls] B; [6] C;

ALL SIGNS IN THIS SECTION ARE SIGN CODE VD2-1

ALL DIMENSIONS SHOWN IN INCHES, EXCEPT WHERE NOTED.
 NOT TO SCALE

TYLIN INTERNATIONAL	PROJECT NAME: STOWE-BERKSHIRE	
	PROJECT NUMBER: STPG SIGN(49)	
	FILE NAME: z\3b620_SD02.dgn	PLOT DATE: 6/25/2015
	PROJECT LEADER: D. BRYANT	DRAWN BY: J. BLANCHARD
	DESIGNED BY: J. BLANCHARD	CHECKED BY: K. KERN
	SIGN DETAILS 5	SHEET 8 OF 131