

DURABLE 4 INCH WHITE LINE, TYPE A TAPE AND TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

CHESTER:
 STA C 265+25.00 - STA C 265+84.00 EDGE LINE LT & RT
 STA C 265+92.00 - STA C 269+50.00 EDGE LINE LT & RT
 STA C 266+99.00 - STA C 267+23.00 SIDEWALK DESIGNATION LINE LT
 STA C 266+99.00 - STA C 267+23.00 SIDEWALK DESIGNATION LINE LT
 STA C 267+93.00 - STA C 268+24.00 SIDEWALK DESIGNATION LINE LT
 STA C 267+93.00 - STA C 268+24.00 SIDEWALK DESIGNATION LINE LT

DURABLE 4 INCH YELLOW LINE, TYPE A TAPE AND TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L LINE BREAKS FOR TOWN HIGHWAYS)

S = SOLID, D = DASHED
 CHESTER:
 STA C 265+25.00 - STA C 269+50.00 LT & RT
 STA C 266+15.00 DOUBLE SOLID LT

DURABLE 8 INCH WHITE LINE, TYPE A TAPE
 CHESTER:
 STA C 265+64.00 - STA C 265+84.00 LT, NO PARKING
 STA C 265+64.00 - STA C 265+84.00 RT, NO PARKING
 STA C 269+46.00 - STA C 269+50.00 RT, FIRE HYDRANT, NO PARKING


DURABLE CROSSWALK MARKING, TYPE A TAPE AND TEMPORARY CROSSWALK MARKING, PAINT
 CHESTER:
 STA C 265+87.00 LT/RT
 STA C 266+03.00 - STA C 266+29.00 LT

DURABLE LETTER OR SYMBOL, TYPE D TAPE
 CHESTER:
 STA C 266+09.00 LT, "S.T.O.P." (4 EA)
 STA C 269+40.00 LT, "S,C,H,O,O,L" (6 EA)

DURABLE 24 INCH STOP BAR, TYPE A TAPE AND TEMPORARY 24 INCH STOP BAR, PAINT
 CHESTER:
 STA C 266+03.00 - STA C 266+16.00 LT

TEMPORARY LETTER OR SYMBOL, PAINT
 CHESTER:
 STA C 266+09.00 LT, "S.T.O.P." (8 EA)
 STA C 269+40.00 LT, "S,C,H,O,O,L" (12 EA)

REMOVING SIGNS
 AS SHOWN - 20

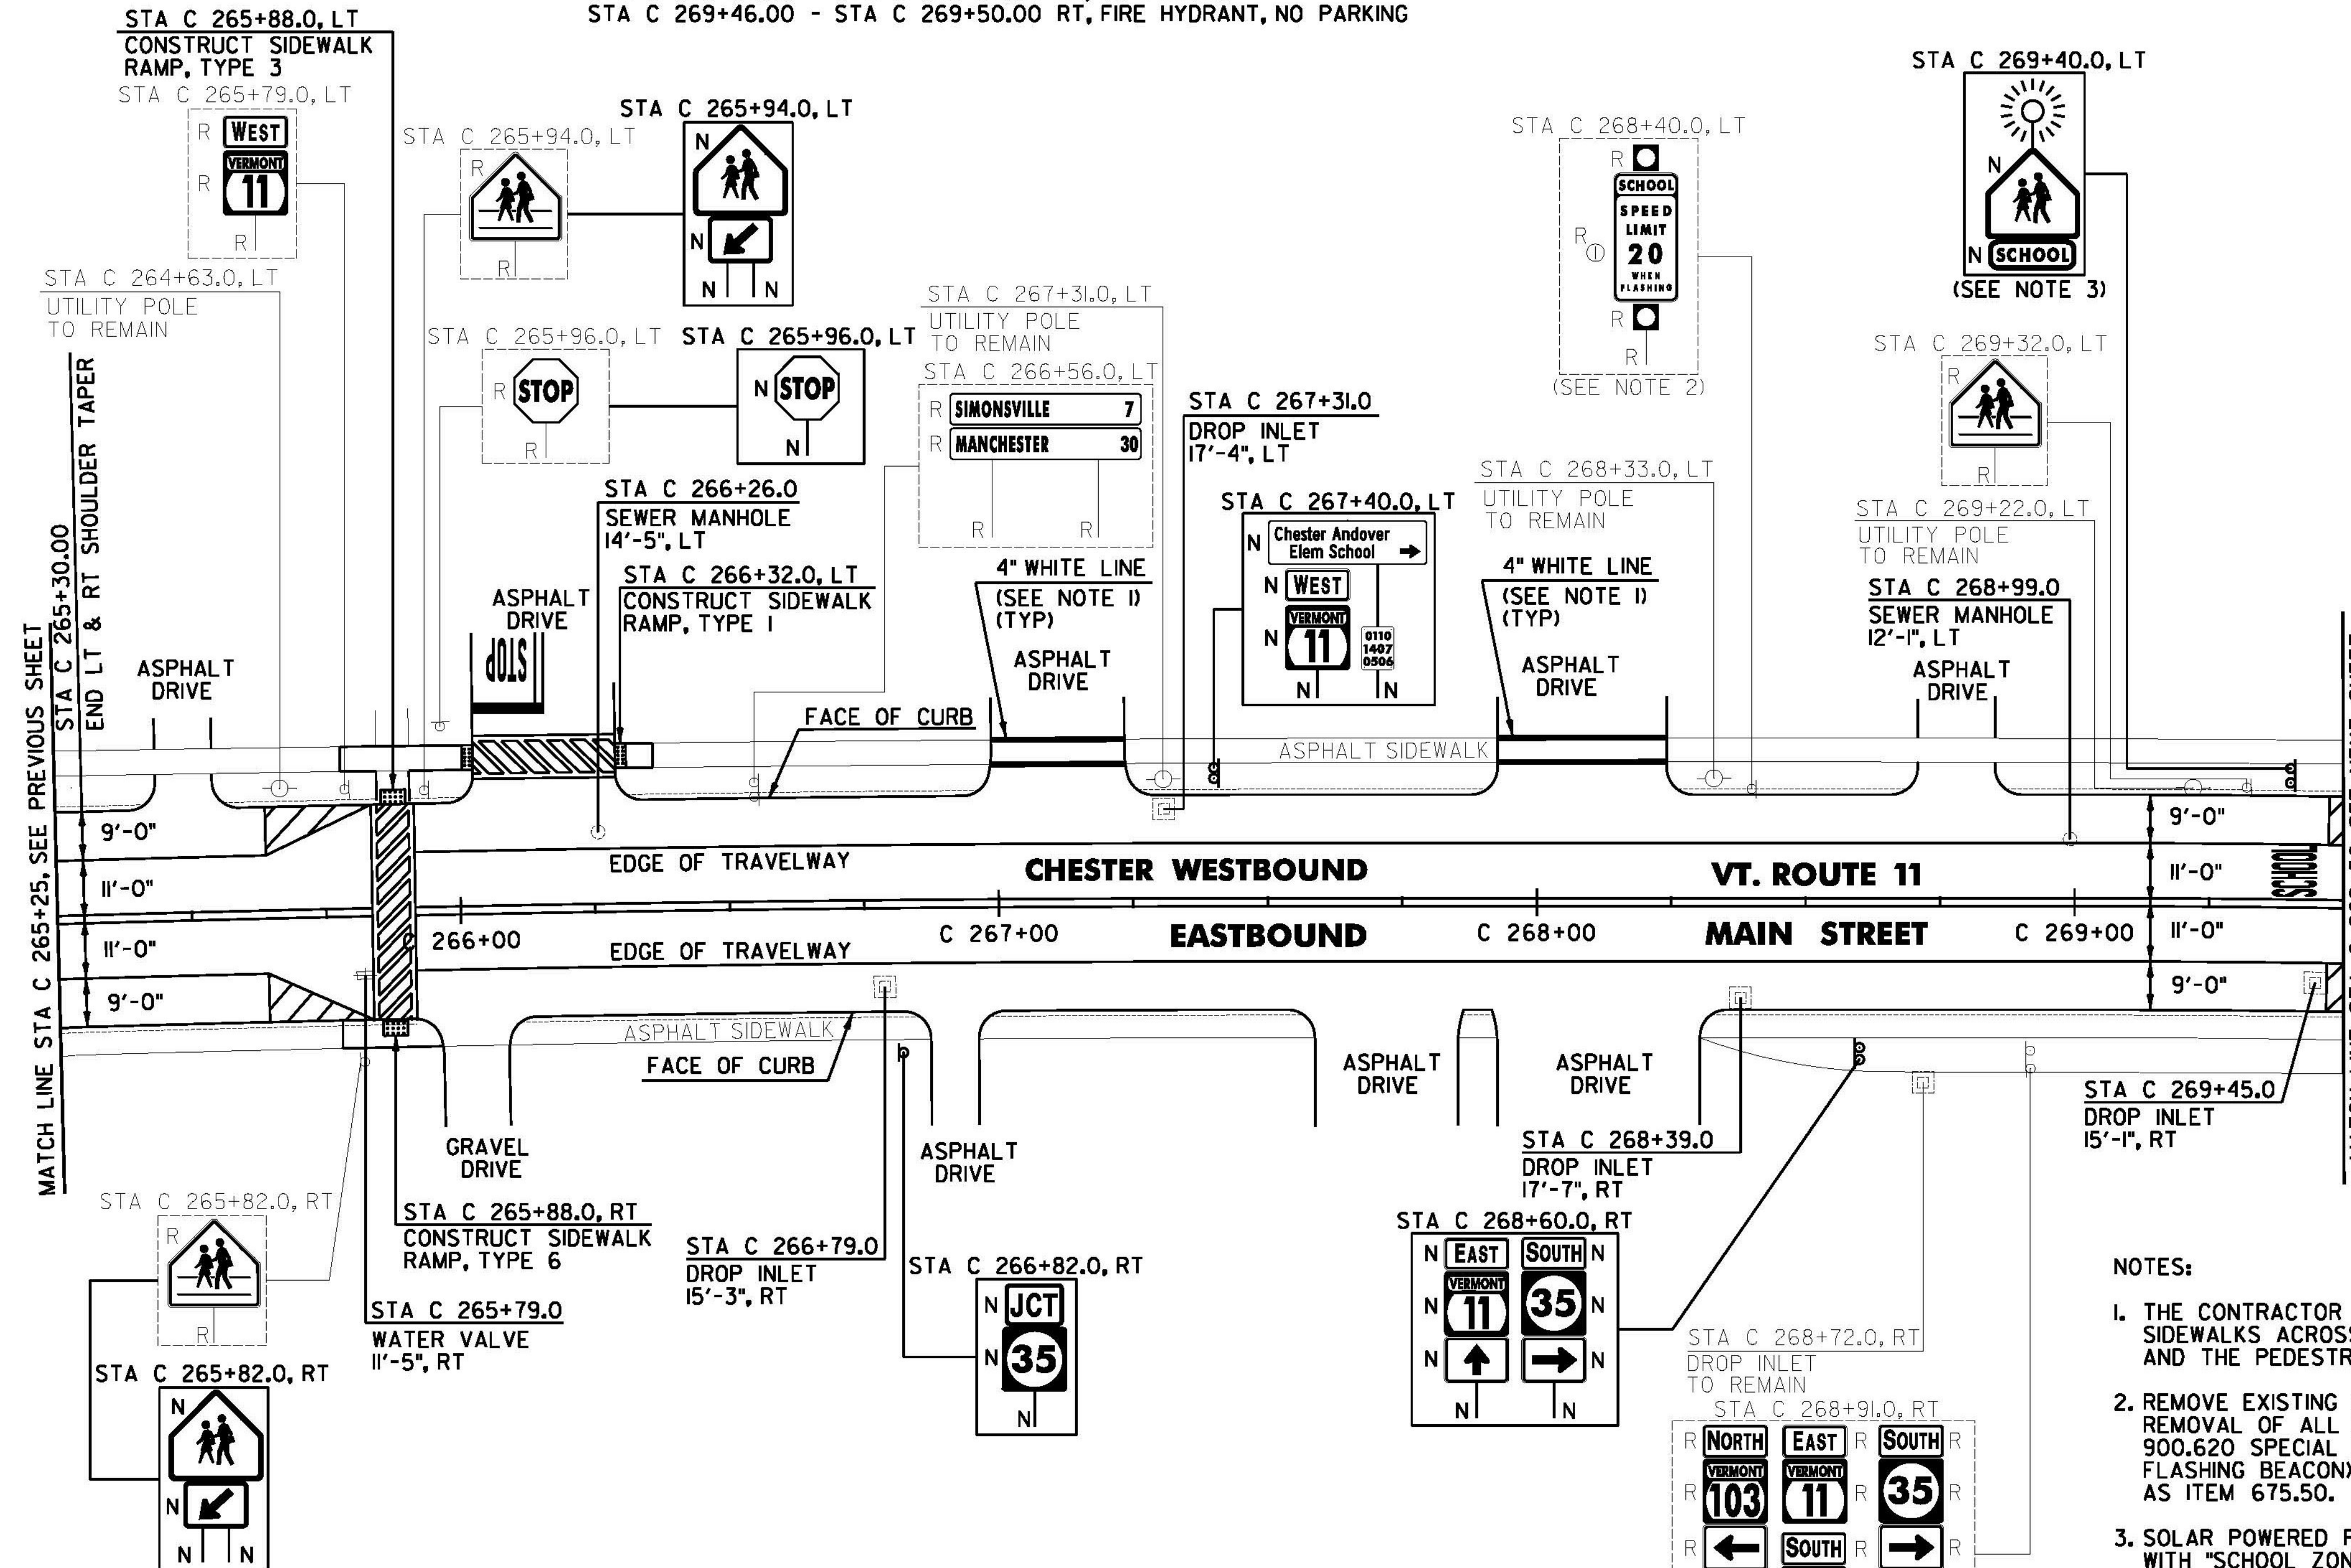

- NOTES:
1. THE CONTRACTOR SHALL PROVIDE 4" WHITE LINES TO CONNECT THE SIDEWALKS ACROSS THE DRIVEWAY AND SEPARATE THE DRIVEWAY AND THE PEDESTRIAN WALKWAY.
 2. REMOVE EXISTING FLASHING BEACON, POLE, FOUNDATION AND WIRING. REMOVAL OF ALL ITEMS SHALL BE CONSIDERED INCIDENTAL TO ITEM 900.620 SPECIAL PROVISION (SOLAR-POWERED SCHOOL ZONE FLASHING BEACON). REMOVAL OF THE EXISTING SIGN SHALL BE PAID AS ITEM 675.50.
 3. SOLAR POWERED FLASHING BEACON SHALL BE USED IN CONJUNCTION WITH "SCHOOL ZONE" SIGN. ALL WORK ASSOCIATED WITH THE INSTALLATION OF THE SCHOOL ZONE FLASHING BEACON WILL BE PAID FOR UNDER ITEM 900.620 SPECIAL PROVISION (SOLAR-POWERED SCHOOL ZONE FLASHING BEACON) AS DIRECTED BY THE ENGINEER. SEE SHEET 96 FOR SOLAR SCHOOL FLASHING BEACON DETAILS.

SPECIAL PROVISION
 (SOLAR POWERED SCHOOL ZONE FLASHING BEACON)

CHESTER:
 STA C 269+40.0 LT

REHAB. DROP INLETS, CATCH BASINS, OR MANHOLES, CLASS I, II, OR III

CHESTER:
 STA C 266+79.0 RT
 STA C 267+31.0 LT
 STA C 268+39.0 RT
 STA C 269+45.0 RT

ADJUST ELEVATION OF VALVE BOX

CHESTER:
 STA C 265+79.0 RT

CHANGING ELEVATION OF SEWER MANHOLES

CHESTER:
 STA C 266+26.0 LT
 STA C 268+99.0 LT

REMOVING AND RESETTING CURB

CHESTER:
 STA C 265+88.0 LT
 STA C 265+88.0 RT
 STA C 266+32.0 LT

DETECTABLE WARNING SURFACE

CHESTER:
 STA C 265+88.0 LT
 STA C 265+88.0 RT
 STA C 266+32.0 LT

PORTLAND CEMENT CONCRETE SIDEWALK, 5 INCH

CHESTER:
 STA C 265+88.0 LT
 STA C 265+88.0 RT
 STA C 266+32.0 LT

SIGN LEGEND

R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = _____
 NEW = _____
 R = RETURN TO TOWN OF CHESTER

NOT TO SCALE

CHESTER PROJECT LAYOUT SHEET #8

PROJECT NAME: CHESTER-SPRINGFIELD-ROCKINGHAM-WINDSOR

PROJECT NUMBER: STP 29520

FILE NAME: z13c518bdr_seg01.dgn

PROJECT LEADER: D. GOZALKOWSKI

DESIGNED BY: A. HAWKINS

PLOT DATE: 3/27/2015

DRAWN BY: A. KIRBY

CHECKED BY: J. SHIELDS

SHEET 38 OF 309

