

DURABLE 4 INCH WHITE LINE, TYPE A TAPE AND TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)
 SPRINGFIELD:
 STA S 262+50.00 - STA S 266+50.00 EDGE LINE LT
 STA S 262+50.00 - STA S 265+69.00 EDGE LINE RT
 STA S 262+50.00 - STA S 264+36.00 SOLID LANE LINE LT
 STA S 264+36.00 - STA S 266+50.00 DASHED LANE LINE LT
 STA S 262+50.00 - STA S 266+50.00 DASHED LANE LINE RT

DURABLE 6 INCH WHITE LINE, TYPE A TAPE AND TEMPORARY 6 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)
 SPRINGFIELD:
 STA S 265+69.00 - STA S 266+50.00 BIKE LANE EDGE LINE RT

DURABLE 4 INCH YELLOW LINE, TYPE A TAPE AND TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L LINE BREAKS FOR TOWN HIGHWAYS)
 S = SOLID, D = DASHED
 SPRINGFIELD:
 STA S 265+69.00 - STA S 266+50.00 LT @ RT
 STA S 262+50.00 - STA S 263+47.00 DOUBLE SOLID MEDIAN LT/CL
 STA S 263+47.00 - STA S 263+89.00 MEDIAN EDGE LINE LT/RT
 STA S 263+89.00 - STA S 265+69.00 DOUBLE SOLID MEDIAN LT/CL



DURABLE LETTER OR SYMBOL, TYPE D TAPE
 SPRINGFIELD:
 STA S 262+55.00 LT, ARROW (1EA)
 STA S 262+55.00 LT, ARROW (1EA)
 STA S 262+99.25 LT, "O,N,L,Y" (4 EA)
 STA S 262+99.25 LT, "O,N,L,Y" (4 EA)
 STA S 263+43.50 LT, ARROW (1EA)
 STA S 263+43.50 LT, ARROW (1EA)
 STA S 263+87.75 LT, "O,N,L,Y" (4 EA)
 STA S 263+87.75 LT, "O,N,L,Y" (4 EA)
 STA S 264+32.00 LT, ARROW (1EA)
 STA S 264+32.00 LT, ARROW (1EA)
 STA S 265+97.00 RT, BIKE LANE SYMBOL (1 EA)

TEMPORARY LETTER OR SYMBOL, PAINT
 SPRINGFIELD:
 STA S 262+55.00 LT, ARROW (2 EA)
 STA S 262+55.00 LT, ARROW (2 EA)
 STA S 263+43.50 LT, ARROW (2 EA)
 STA S 263+43.50 LT, ARROW (2 EA)
 STA S 264+32.00 LT, ARROW (2 EA)
 STA S 264+32.00 LT, ARROW (2 EA)

REMOVING SIGNS AS SHOWN - 9

DURABLE 8 INCH YELLOW LINE, TYPE A TAPE
 SPRINGFIELD:
 STA S 262+50.00 - STA S 263+47.00 HATCHED MEDIAN LT/CL
 STA S 263+89.00 - STA S 265+69.00 HATCHED MEDIAN LT/CL

PAINTED CURB
 STA S 263+47.00 - STA S 263+89.00 LT/CL (84.0 LF)

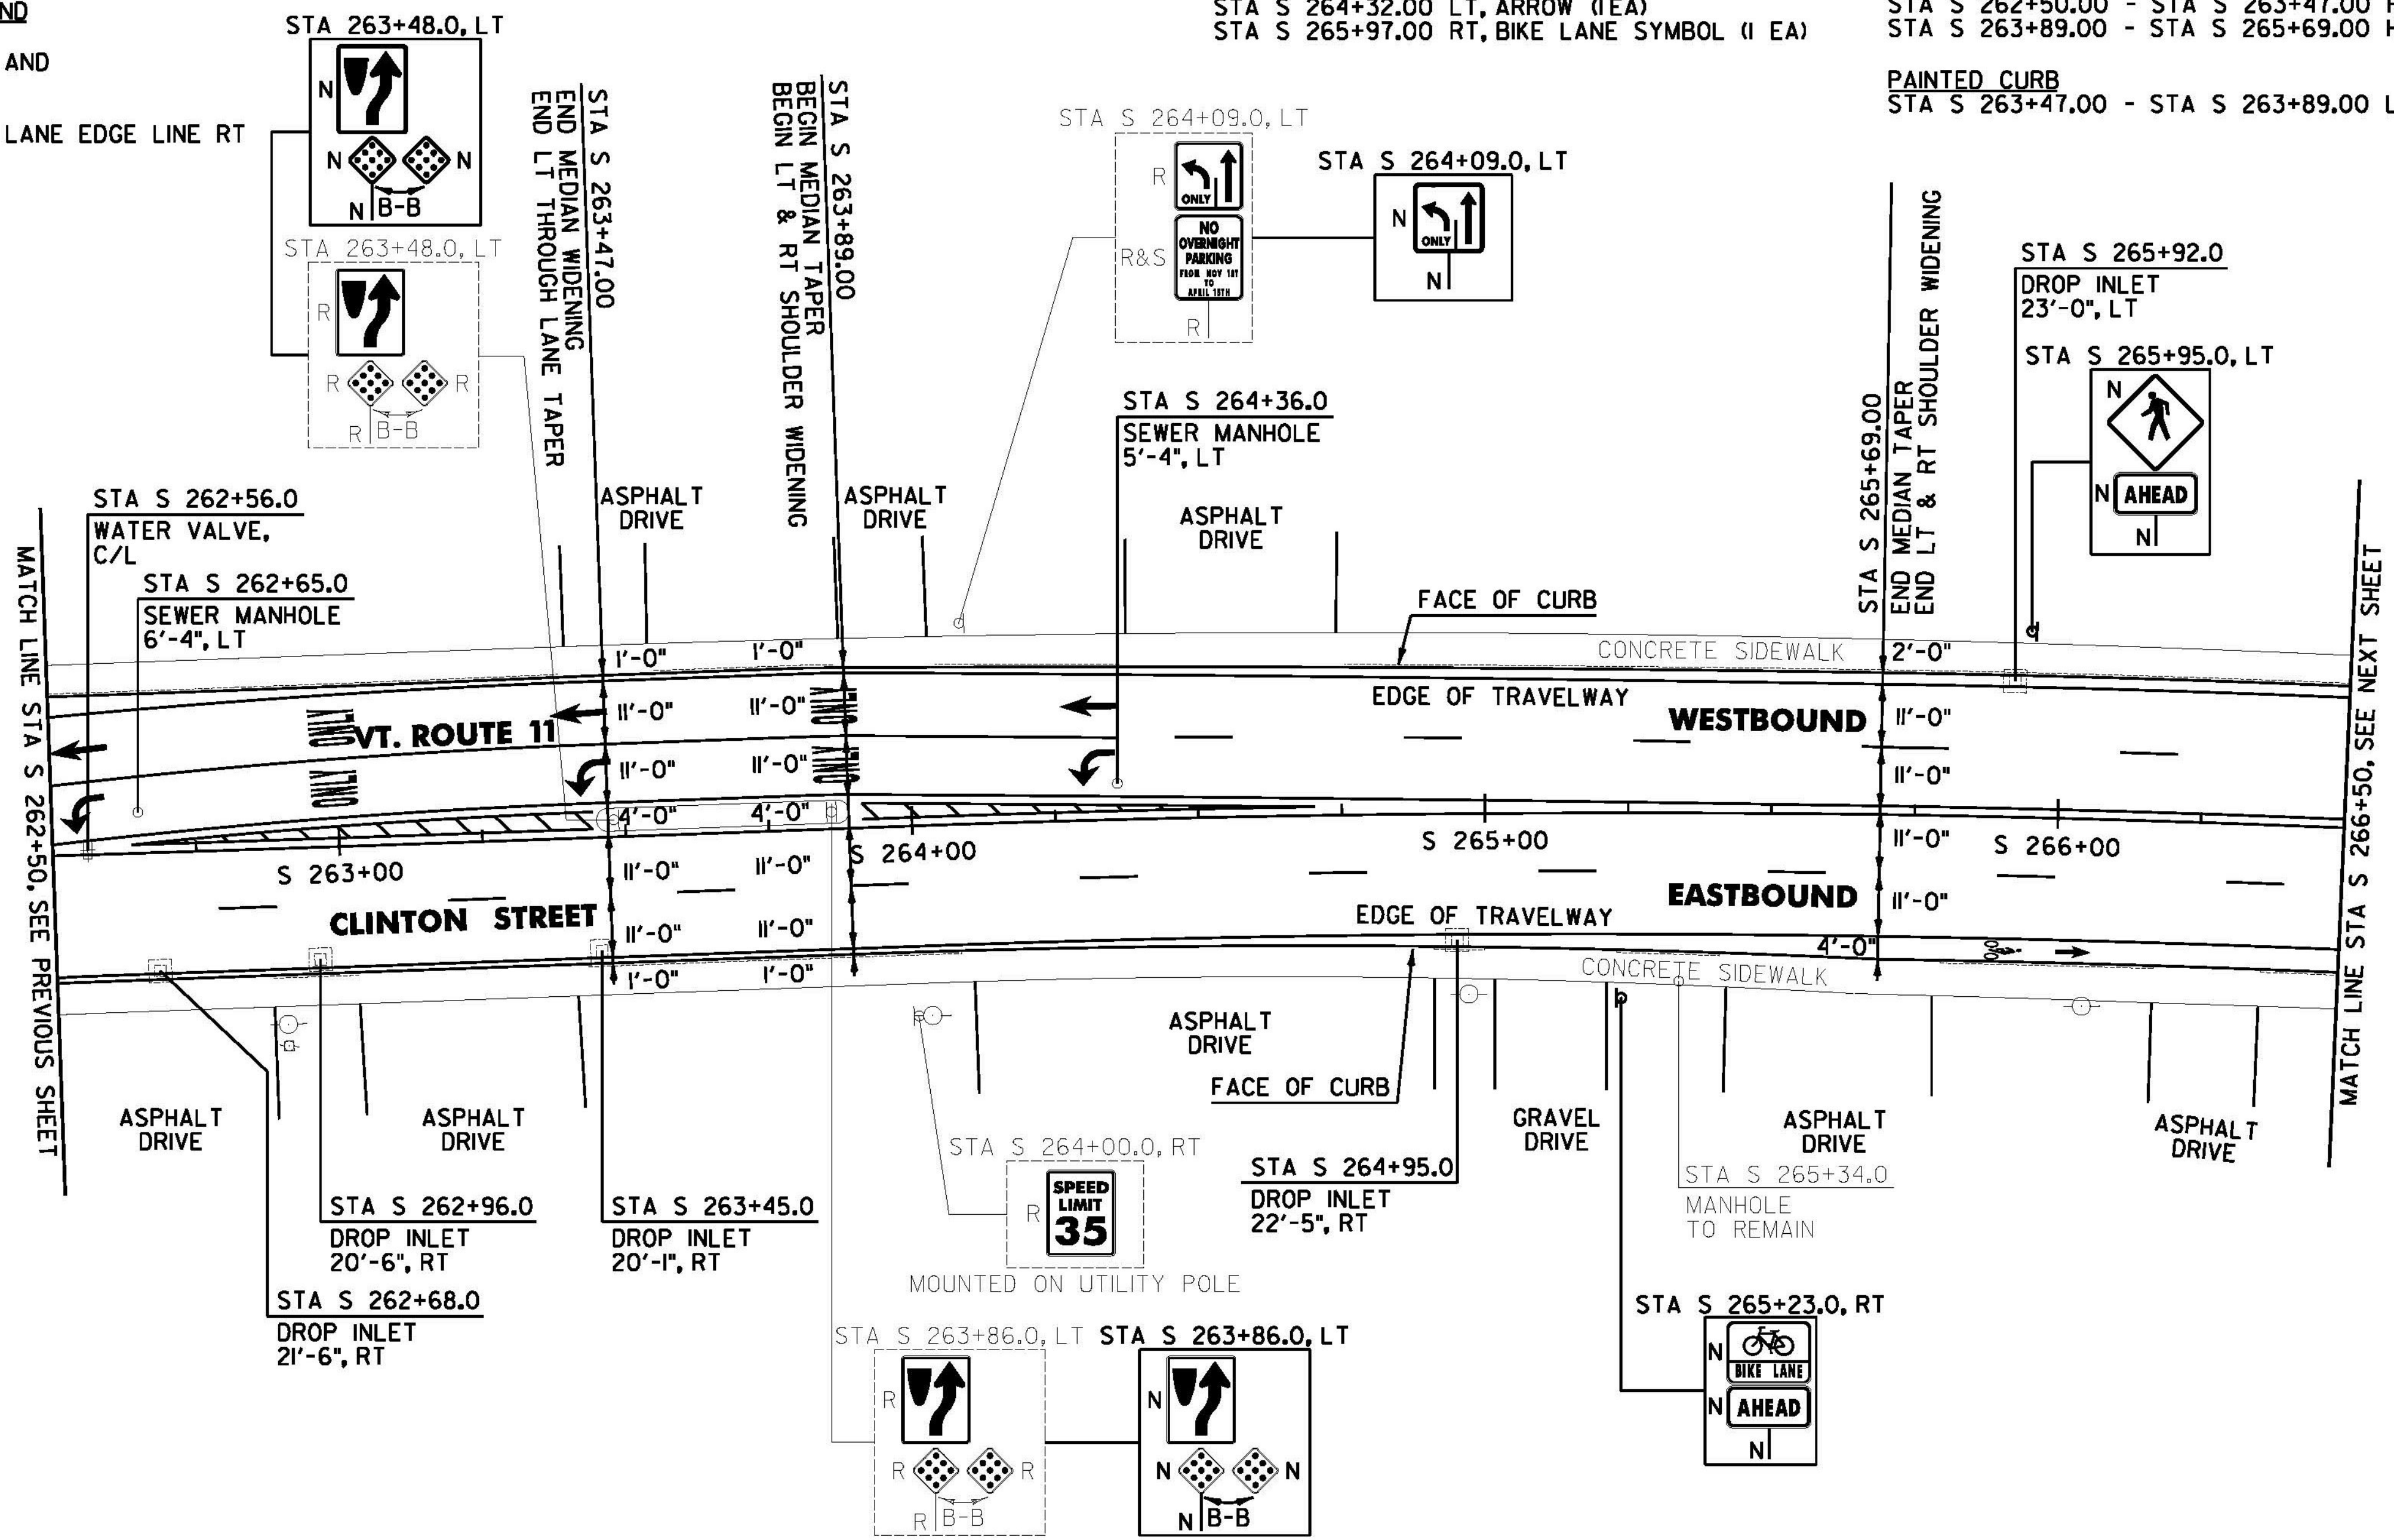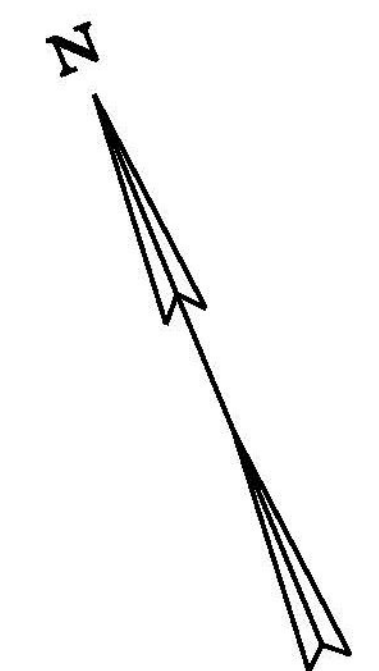

REHAB. DROP INLETS, CATCH BASINS, OR MANHOLES, CLASS I, II, OR III
 SPRINGFIELD:
 STA S 262+68.0 RT
 STA S 262+96.0 RT
 STA S 263+45.0 RT
 STA S 264+95.0 RT
 STA S 265+92.0 LT

CHANGING ELEVATION OF SEWER MANHOLES
 SPRINGFIELD:
 STA S 262+65.0 LT
 STA S 264+36.0 LT

ADJUST ELEVATION OF VALVE BOX
 SPRINGFIELD:
 STA S 262+56.0 C/L

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = _____
 NEW = _____
 R = RETURN TO TOWN OF SPRINGFIELD

NOT TO SCALE
SPRINGFIELD PROJECT LAYOUT SHEET #17

| | |
|--|------------------------|
| PROJECT NAME: CHESTER-SPRINGFIELD-ROCKINGHAM-WINDSOR | PLOT DATE: 3/27/2015 |
| PROJECT NUMBER: STP 29520 | DRAWN BY: A. KIRBY |
| FILE NAME: z13c518bdr_seg02.dgn | CHECKED BY: J. SHIELDS |
| PROJECT LEADER: D. GOZALKOWSKI | SHEET 124 OF 309 |
| DESIGNED BY: A. HAWKINS | |