


Bondo® Traffic Loop Sealer

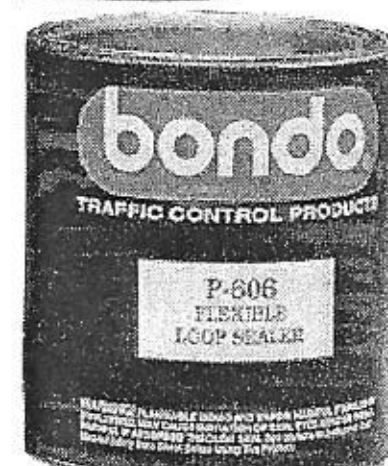

A polyester 2-part compound supplied in homogenized, ready to use consistency

Durable, permanently elastic to seal saw cut openings and to hold sensitized wire loops for control of traffic signals, parking lot gates, traffic counters, etc.

- Rapid curing to minimize length of time a lane must be closed.
- Cures chemically assuring max. protection of loop wires.
- Excellent adhesion to cement and cured asphalt concrete.
- Withstands the corrosive effects of road salts, auto fluids, jet fuel and gasoline, etc. Unaffected by freeze/thaw cycles.

Part No. 606 - One gallon pail. Standard package: 4 cans (49 lbs.)

Part No. 6065 - 5 gallon pail

Bondo® Sealant Hardener #65

Additional hardener may be purchased separately in .74 oz. tubes. Hardener is used to catalyze Bondo® Loop Sealants. Up to twice the normal amount of hardener can be used to catalyze in cooler weather.

Part No. 609

Instructions for 609:

Temperature	Tubes of .74 oz. Hardener per Gallon of Sealant
80° or higher	1
60°-79°	2
40°-59°	3
29°-39°	4

Extra hardener is packaged as follows:

Part No. 7 - 12 oz. for five gallon dispensing system


Part No. 5 - 1 gallon for 50 gallon dispensing systems

Bondo® Speed Set Accelerator

Used to accelerate the rate of cure of Bondo® Polyester Loop Sealants at temperatures below 40°F. The accelerator makes it possible to use Bondo Polyester Loop Sealers year-round. For use with 1 gallon Bondo Traffic Loop Sealer. Instructions available. .5 fl. oz.

Part No. 610

Bondo® Sealer Dispensing Machine

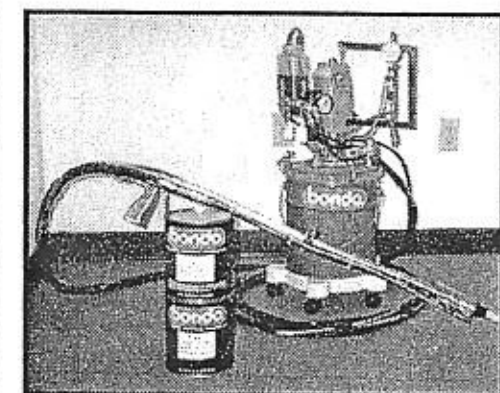

Designed for fast, clean and easy dispensing of Bondo® polyester sealers supplied in 5-gallon containers.

Part No. RCLSD2003

To help estimate the number of gallons needed. One gallon of sealer when mixed with liquid hardener will cover:

Loop Size width x depth (in)	Loop Length (linear foot)
1/2 x 1	38 - 40
3/8 x 1	51 - 53
1/4 x 1	76 - 80
1/2 x 1-1/2	25 - 27
3/8 x 1-1/2	34 - 36
1/4 x 1-1/2	51 - 53

Bondo® 575 One Part Sealant

Reduce container changing, increase work speed.

Part No. 575 - 1 quart cartridge

Part No. 560 - 1 liter sausage pack

Part No. 577 - 4.5 gallon pail, gray

Part No. 578 - 4.5 gallon pail, black

Bondo® Dispensing Guns



Speed up your production time by using 1-quart portable battery operated Dispensing Guns. Install more loops with ease - just charge the batteries and pull the trigger. Each gun comes with two

rechargeable batteries and a battery charger. Battery operated dispensing guns for the one liter.

Part No. 7035.B0NIN

Detector Loop Sealant



Q-Seal 290S - Designed for use in both asphalt and concrete pavement to provide a weather- and chemical-resistant waterproof seal. From Chemque.

Part No. 290S5BLK - 5 gallon pail, black

Part No. 290S5GRY - 5 gallon pail, gray

Part No. 290S30FLOZBLK - 30 fl. oz., black

Part No. 290S40FLOZGRY - 40 fl. oz., gray