LOCATION OF DRIVES

STATION	POSITION	QUANTITY (SY)
DRIVES		
22+87	LT	12
32+67	RT	3
34+23	LT	3
37+60	RT	7
43+90	RT	4
49+75	RT	7
54+09	RT	6
58+13	RT	6
62+10	LT	7
68+94	LT	7
69+03	RT	3
70+50	LT	3
70+64	RT	3
N 1+06	RT	7
N 13+19	LT	5
N 15+37	RT	7
N 19+47	RT	4
N 30+58	RT	4
N 35+63	RT	3
N 36+44	LT	8
N 39+12	LT	5
N 54+84	LT	7
N 72+52	LT	31
N 75+55	LT	7
N 77+22	RT	5
N 79+65	RT	7
N 88+33	RT	4
N 88+35	LT	4
N 90+63	LT	6
N 91+00	LT	4
N 91+82	LT	4
N 92+27	RT	6
N 92+61	LT	5
N 93+52	RT	3
N 93+83	LT	8
N 94+57	RT	4
N 95+01	LT	9
N 95+27	RT	3
N 97+38	RT	10
N 98+09	RT	8
N 99+03	LT	5
N 99+92	RT	18
N 101+10	RT	4
N 101+85	RT	4
N 103+14	RT	9
N 109+02	LT	14
DRIVES SUBTOTAL		**303**

STATION	POSITION	QUANTITY (SY)
PULLOFFS		
N 51+27	RT	52
N 83+26	LT	40
PULLOFFS SUBTOTAL		**92**
TOWN HIGHWAY		
26+82	LT	18
37+63	LT	14
52+14	LT	22
N 45+23	RT	10
N 91+01	RT	45
N 92+92	LT	22
N 107+26	LT	31
N 107+26	RT	41
TOWN HIGHWAY SUBTOTAL		**203**
DRIVES SUBTOTAL		**303**
PULLOFFS SUBTOTAL		**92**
TOWN HIGHWAY SUBTOTAL		**203**
PROJECT SUBTOTAL		**598**
ROUNDING		**2**
PROJECT TOTAL		**600**

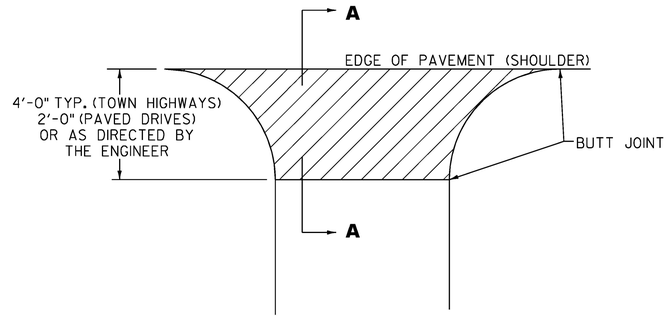

PLAN

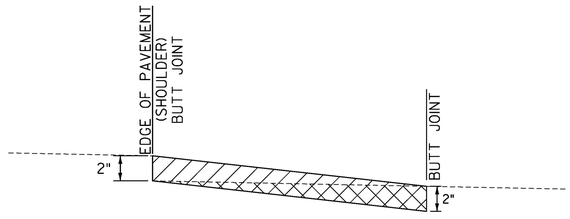

SECTION A – A

HANDWORK DETAILS FOR PAVED TOWN HIGHWAYS AND DRIVES

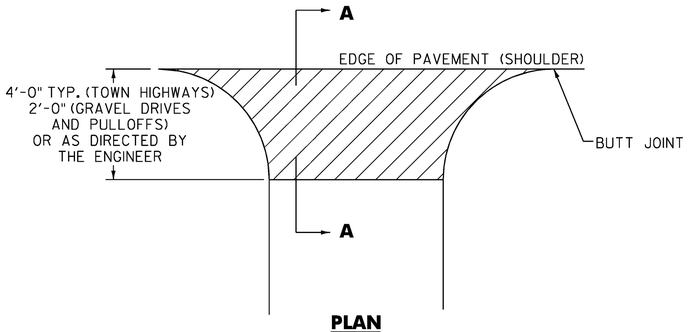

PLAN

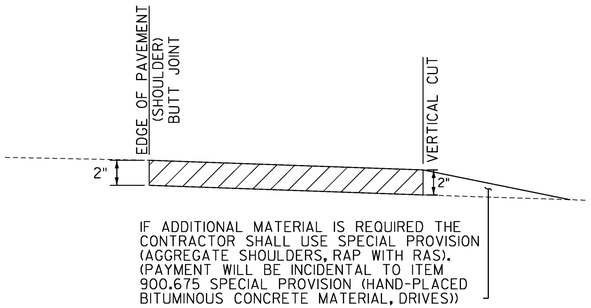

SECTION A – A

HANDWORK DETAILS FOR GRAVEL TOWN HIGHWAYS, PULLOFFS AND DRIVES

NOTES

1. PAVING LIFT NOT TO EXCEED TWO INCHES.

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES AT LEAST 24 HOURS BEFORE PAVING, WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675, SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

3. EXCAVATION NEEDED TO ACHIEVE PROPER DRIVE AND PULLOFF SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675, SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

4. COLD PLANING FOR DRIVES WILL MEET THE REQUIREMENTS OF SECTION 210 AS APPLICABLE. PAYMENT FOR COLD PLANED AREAS REQUIRED FOR DRIVES WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

LEGEND

ITEM 900.675 - SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)

COLD PLANE AREA

NOT TO SCALE

PROJECT NAME:	ROXBURY-NORTHFIELD
PROJECT NUMBER:	STP FPAV(6)
FILE NAME: z16v027frm.dgn	PLOT DATE: 2/8/2017
PROJECT LEADER: P. SHEDD	DRAWN BY: S. GOODWIN
DESIGNED BY: N. LEMAY	CHECKED BY: P. SHEDD
HANDWORK DETAIL SHEET	SHEET 13 OF 21