

MILLED RUMBLE STRIPS (CENTERLINE)
STA. E 260+90 TO E 264+00, CL

STONE FILL, TYPE I
SLOPE EROSION PREVENTION WITH GUARDRAIL:
STA. E 262+25 TO E 264+00, RT
(SEE SHEET 19)

STEEL BEAM GUARDRAIL, GALVANIZED
STA. E 261+35.0 TO E 261+47.5, RT



ANCHOR FOR STEEL BEAM RAIL
STA. E 261+35.0, RT

REMOVAL AND DISPOSAL OF GUARDRAIL
STA. E 261+35.0 TO E 264+00.0, RT

ALTERNATES ZA1 & ZA2 BID ITEMS
S.P. (GREGORY MINI SPACER G.R.)(GMS) W/8 FEET POSTS
S.P. (NON-BLOCKED MIDWEST G.R. SYSTEM)(MGS) W/8 FEET POSTS
STA. E 261+47.5 TO E 264+00.0, RT

DURABLE 4 INCH WHITE LINE, (OPTION CC BID ITEMS)
TEMPORARY 4 INCH WHITE LINE, PAINT
(ALL LINES WILL INCLUDE EDGE LINE BREAKS
AND RADII FOR SIDE ROADS)
STA. E 259+00 TO E 264+00, SOLID LT & RT

DURABLE 4 INCH YELLOW LINE, (OPTION DD BID ITEMS)
TEMPORARY 4 INCH YELLOW LINE, PAINT
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
STA. E 259+00 TO E 259+78, SOLID LT & RT
STA. E 259+78 TO E 264+00, SOLID LT, DASHED RT

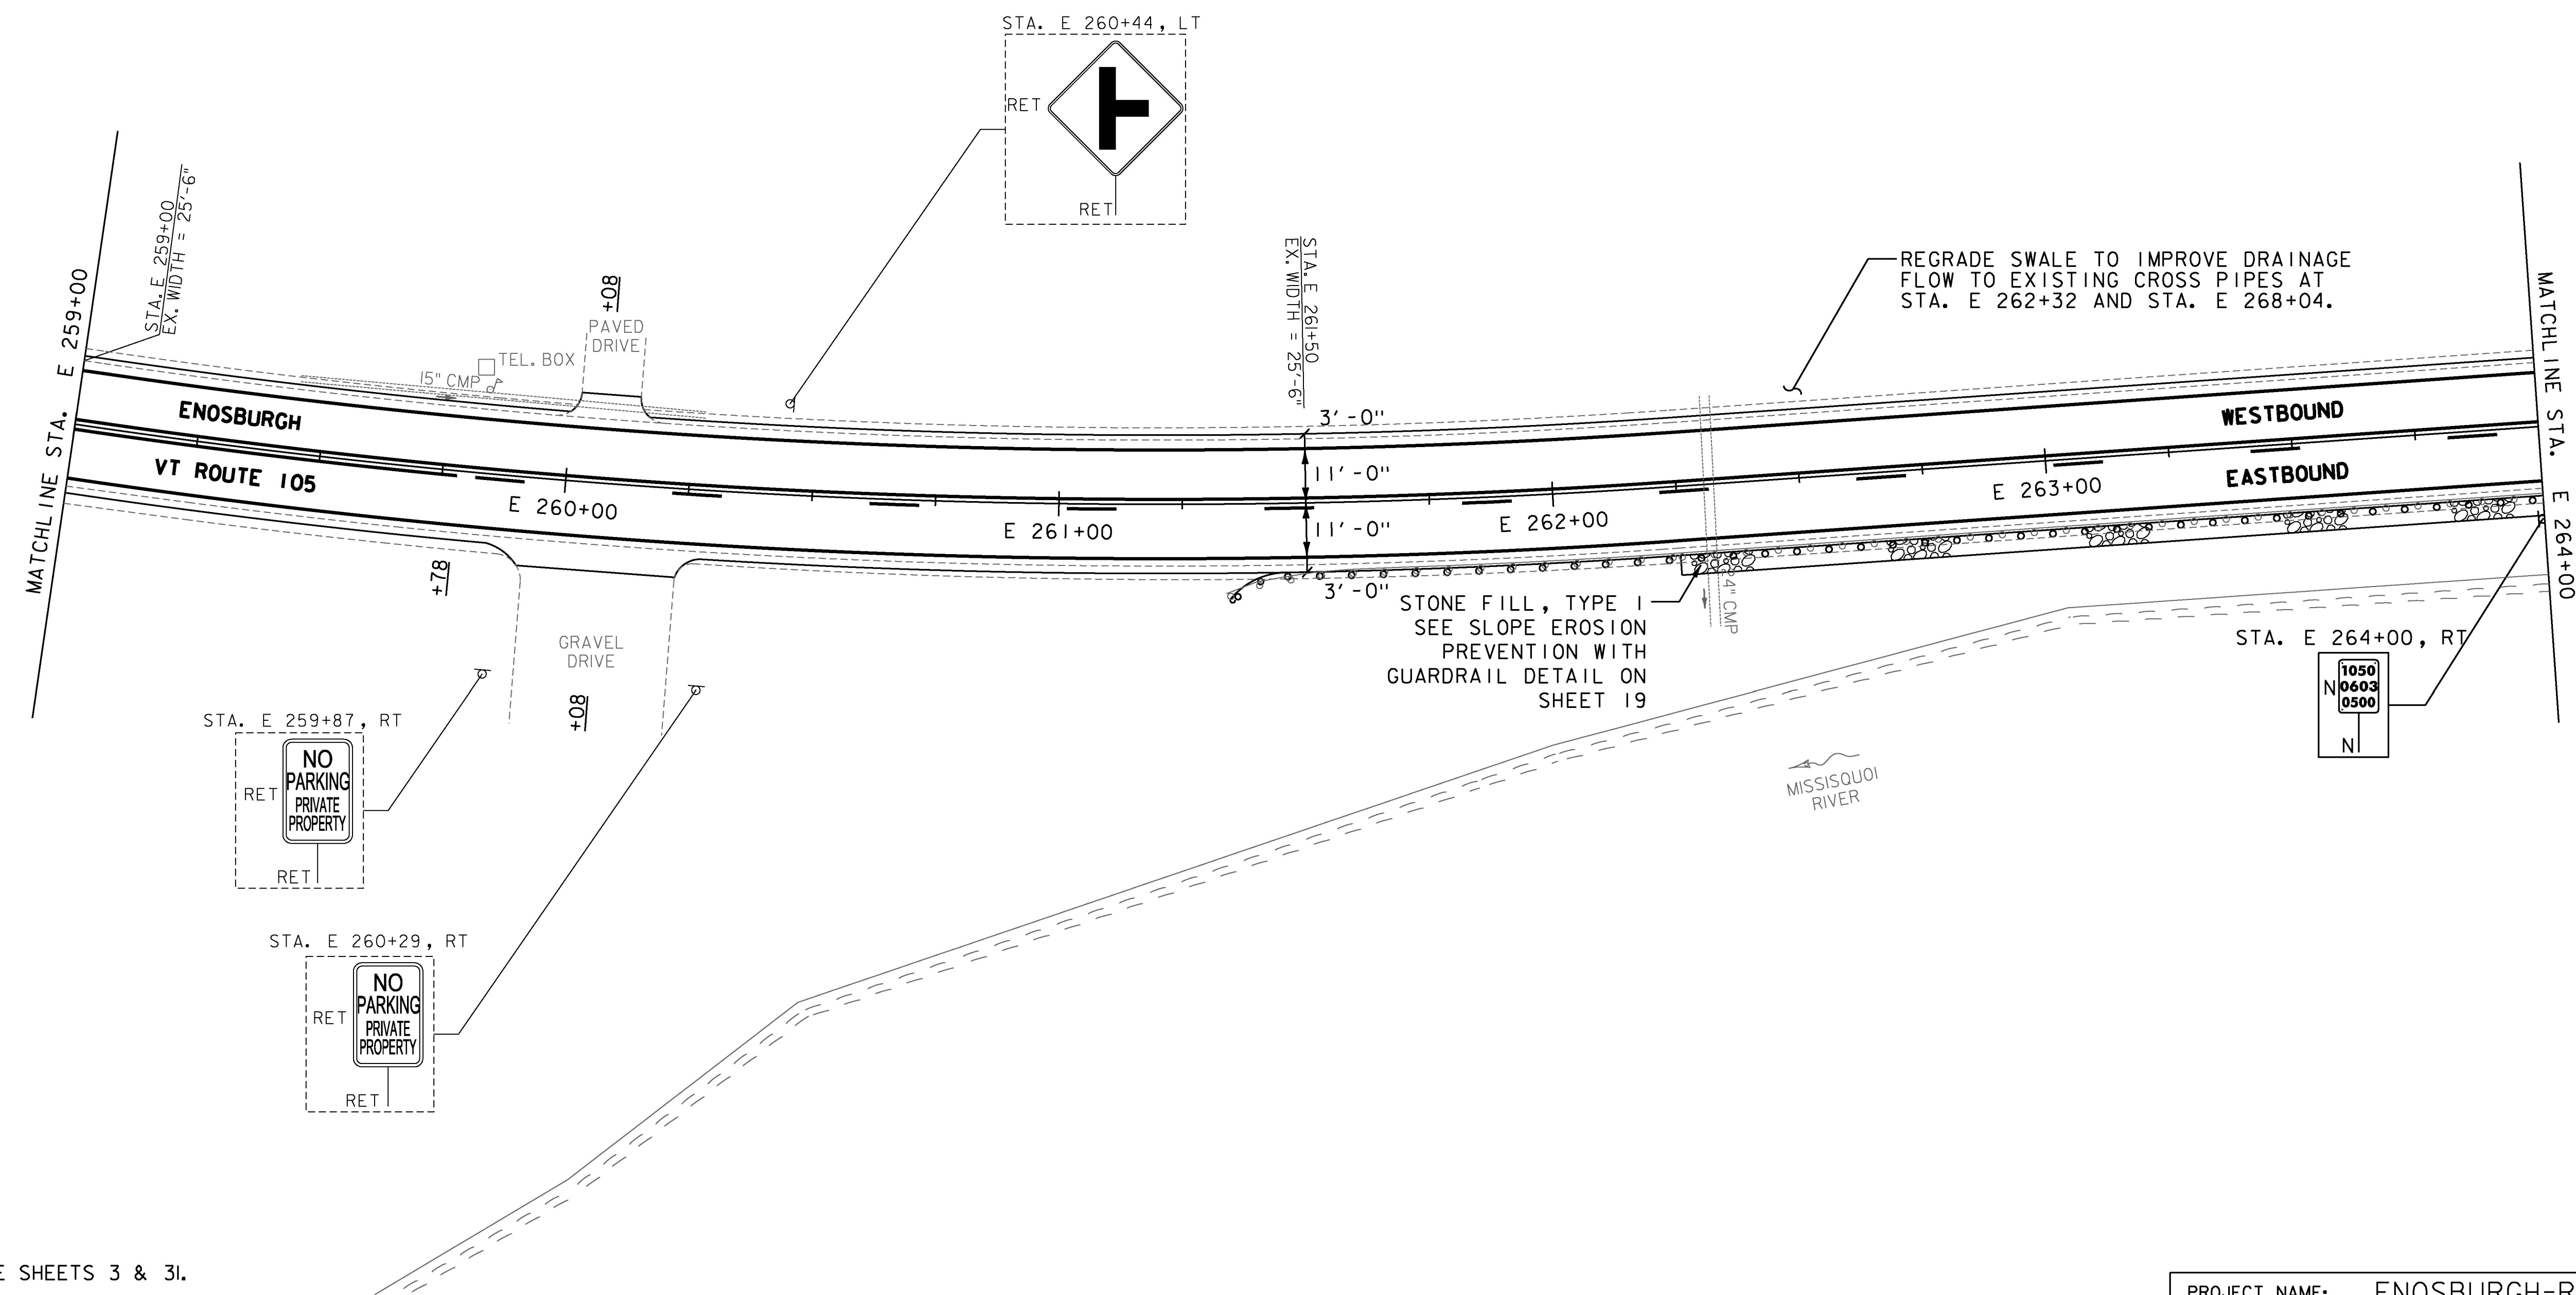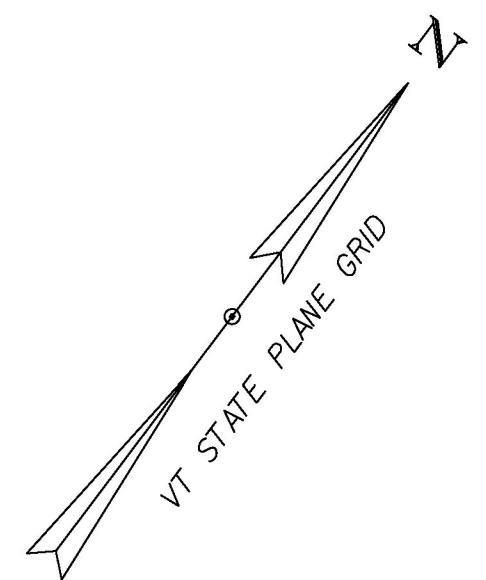

- NOTES:**
- FOR LEGENDS, SEE SHEETS 3 & 3I.
 - ALL EXISTING SIGNS NOT SHOWN ON THE PLANS SHALL BE RETAINED.
 - ALL UTILITY LOCATIONS SHOWN ARE APPROXIMATE AND SHOULD BE VERIFIED PRIOR TO ANY WORK COMMENCING.



PROJECT NAME:	ENOSBURGH-RICHFORD
PROJECT NUMBER:	STP 2969(I)
FILE NAME:	z16vi04bdr.dgn
PROJECT LEADER:	G. EDWARDS
DESIGNED BY:	G. BURGMEIER
PLAN SHEET 37	
PLOT DATE:	4/2/2018
DRAWN BY:	G. BURGMEIER
CHECKED BY:	J. LITTLE
SHEET	67 OF 222