

MILLED RUMBLE STRIPS (CENTERLINE)

STA. B 97+00 TO B 98+74, CL
STA. B 99+14 TO B 102+00, CL

ANCHOR FOR STEEL BEAM RAIL

STA. B 100+23.0, RT
STA. B 101+37.0, LT

DURABLE 4 INCH WHITE LINE, (OPTION CC BID ITEMS)

TEMPORARY 4 INCH WHITE LINE, PAINT
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADII FOR SIDE ROADS)
STA. B 97+00 TO B 102+00, SOLID LT & RT
STA. B 98+94, SOLID RT (EDGE LINES, RIVER RD. TH-46)

DURABLE 4 INCH YELLOW LINE, (OPTION DD BID ITEMS)

TEMPORARY 4 INCH YELLOW LINE, PAINT
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
STA. B 97+00 TO B 98+47, DASHED LT, SOLID RT
STA. B 98+47 TO B 102+00, SOLID LT & RT
STA. B 98+94, DOUBLE SOLID RT (RIVER RD. TH-46)

DURABLE LETTER OR SYMBOL, (OPTION GG BID ITEMS)

TEMPORARY LETTER OR SYMBOL, PAINT
STA. B 98+94, RT "STOP" (RIVER RD. TH-46)

STONE FILL, TYPE J

SLOPE EROSION PREVENTION WITH GUARDRAIL:
STA. B 100+23 TO B 102+00, RT
STA. B 101+37 TO B 102+00, LT
(SEE SHEET 19)

REMOVAL AND DISPOSAL OF GUARDRAIL

STA. B 100+23.0 TO B 102+00.0, RT
STA. B 101+51.0 TO B 102+00.0, LT

DURABLE 24 INCH STOP BAR, (OPTION FF BID ITEMS)


TEMPORARY 24 INCH STOP BAR, PAINT
STA. B 98+94, RT (RIVER RD. TH-46)

REMOVING SIGNS

AS SHOWN - 6


ERECTING SALVAGED SIGNS

AS SHOWN - 1

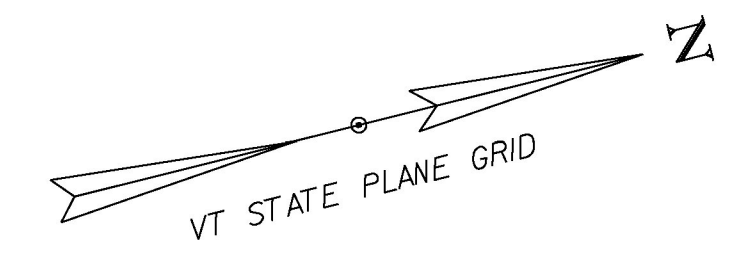

STEEL BEAM GUARDRAIL, GALVANIZED

STA. B 100+23.0 TO B 102+00.0, RT
STA. B 101+37.0 TO B 102+00.0, LT

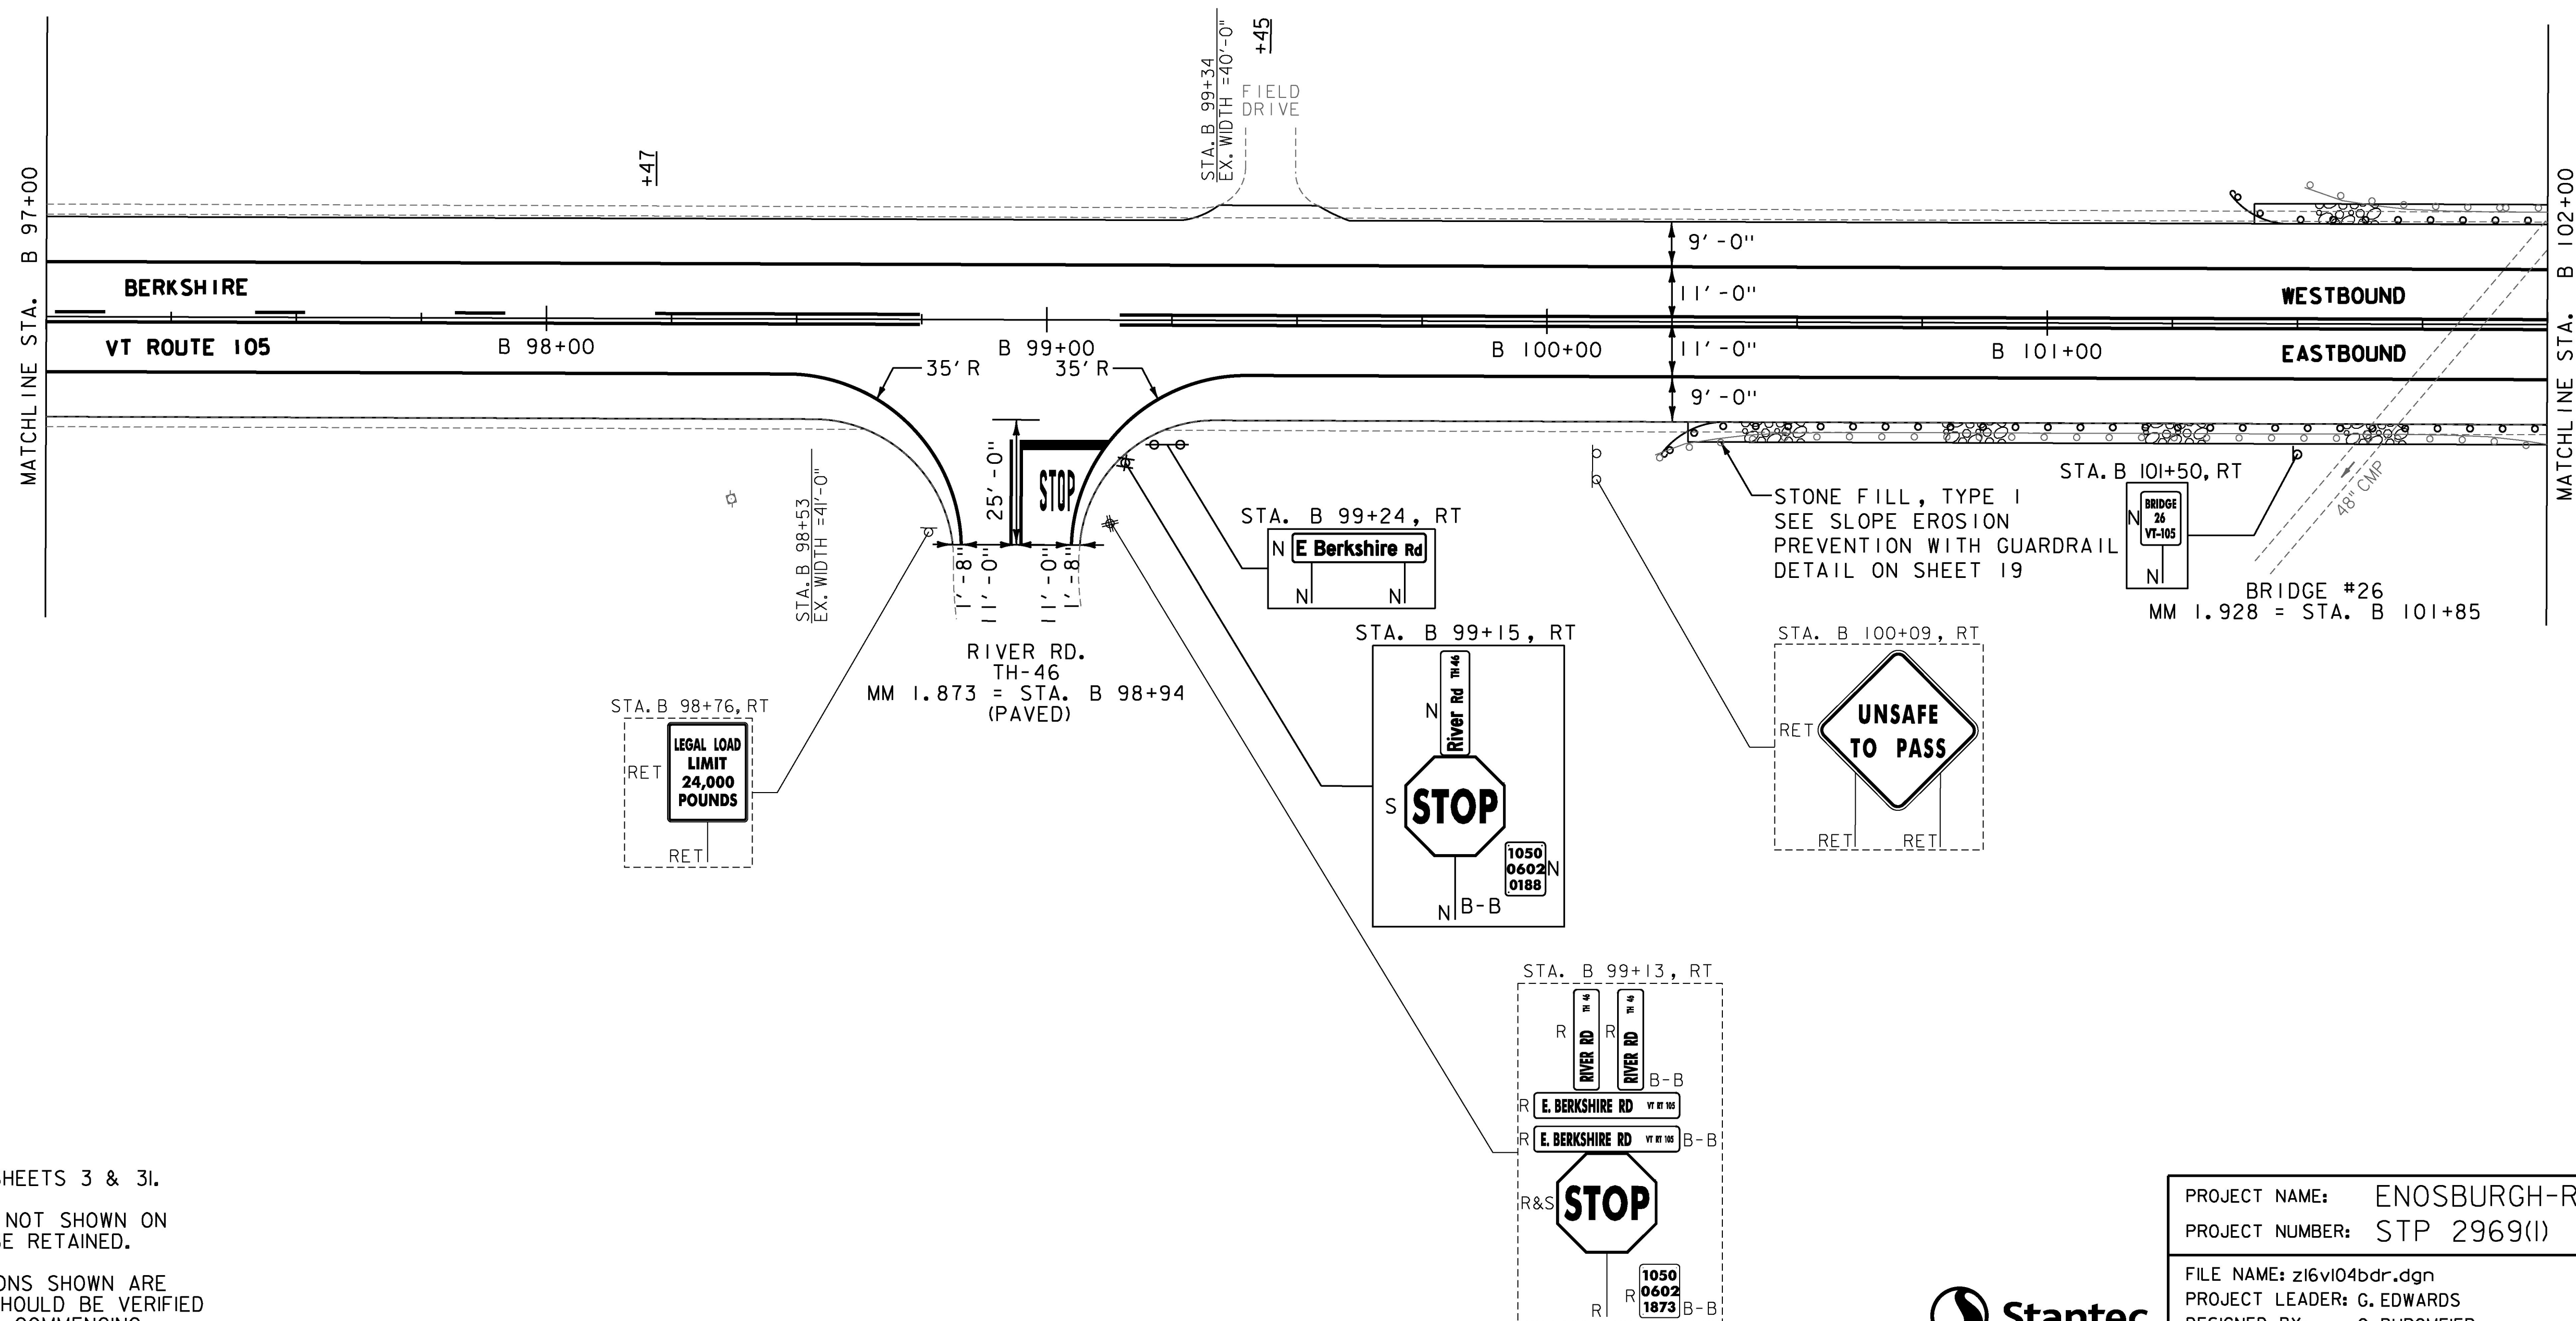

NOTES:

- FOR LEGENDS, SEE SHEETS 3 & 3I.
- ALL EXISTING SIGNS NOT SHOWN ON THE PLANS SHALL BE RETAINED.
- ALL UTILITY LOCATIONS SHOWN ARE APPROXIMATE AND SHOULD BE VERIFIED PRIOR TO ANY WORK COMMENCING.



PROJECT NAME:	ENOSBURGH-RICHFORD
PROJECT NUMBER:	STP 2969(I)
FILE NAME:	z16vi04bdr.dgn
PROJECT LEADER:	G. EDWARDS
DESIGNED BY:	G. BURGMEIER
PLAN SHEET 60	
PLOT DATE:	4/2/2018
DRAWN BY:	G. BURGMEIER
CHECKED BY:	J. LITTLE
SHEET 90 OF 222	