

MILLED RUMBLE STRIPS (CENTERLINE)
STA. B 112+00 TO B 117+00, CL

STONE FILL, TYPE J
SLOPE EROSION PREVENTION WITH GUARDRAIL:
STA. B 112+16 TO B 113+29, RT
STA. B 112+22 TO B 113+22, LT
(SEE SHEET 19)

STEEL BEAM GUARDRAIL, GALVANIZED
STA. B 112+16.0 TO B 113+28.5, RT
STA. B 112+22.0 TO B 113+22.0, LT



ANCHOR FOR STEEL BEAM RAIL
STA. B 112+16.0, RT
STA. B 112+22.0, LT
STA. B 113+22.0, LT
STA. B 113+28.5, RT

REMOVAL AND DISPOSAL OF GUARDRAIL
STA. B 112+16.0 TO B 113+28.5, RT
STA. B 112+22.0 TO B 113+22.0, LT

DURABLE 4 INCH WHITE LINE, (OPTION CC BID ITEMS)
TEMPORARY 4 INCH WHITE LINE, PAINT
(ALL LINES WILL INCLUDE EDGE LINE BREAKS
AND RADII FOR SIDE ROADS)
STA. B 112+00 TO B 117+00, SOLID LT & RT

DURABLE 4 INCH YELLOW LINE, (OPTION DD BID ITEMS)
TEMPORARY 4 INCH YELLOW LINE, PAINT
(ALL LINES WILL INCLUDE ϕ BREAKS FOR SIDE ROADS)
STA. B 112+00 TO B 115+10, SOLID LT, DASHED RT
STA. B 115+10 TO B 117+00, DASHED CL

REMOVING SIGNS
AS SHOWN - 1

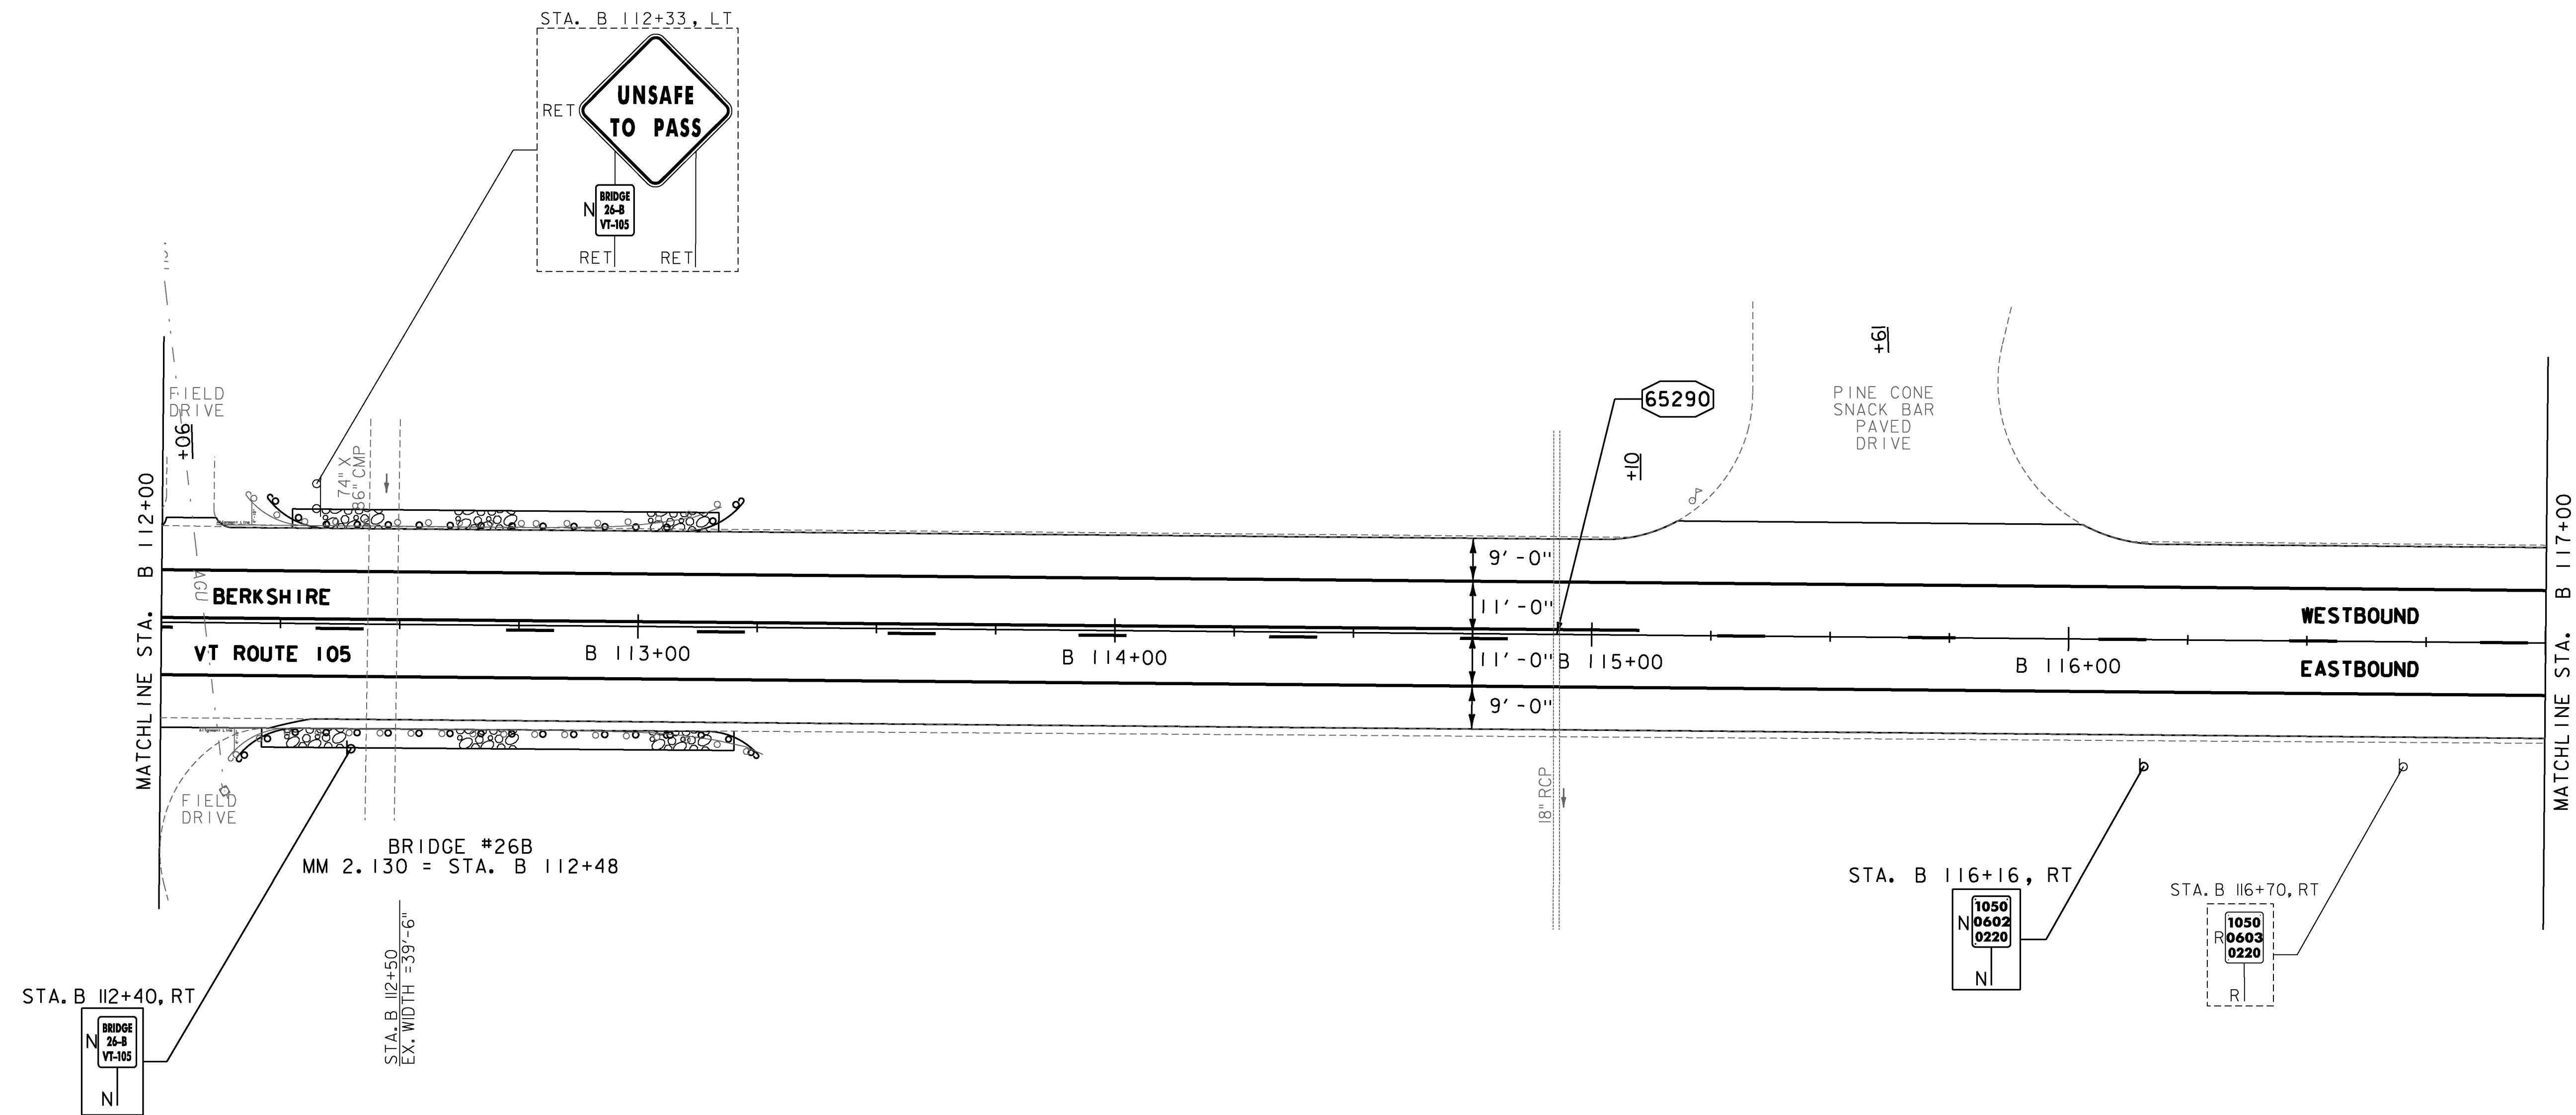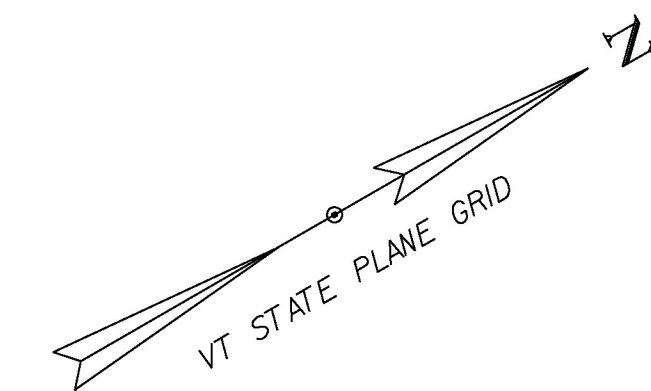

- NOTES:**
- FOR LEGENDS, SEE SHEETS 3 & 3I.
 - ALL EXISTING SIGNS NOT SHOWN ON THE PLANS SHALL BE RETAINED.
 - ALL UTILITY LOCATIONS SHOWN ARE APPROXIMATE AND SHOULD BE VERIFIED PRIOR TO ANY WORK COMMENCING.
 - SEE SHEET 29 FOR CULVERT INFORMATION.

65290 CLEANING CULV. PIPE, IN-PLACE [0 TO 24 IN., INCL.]
STA. B 114+93, I04 LF



PROJECT NAME:	ENOSBURGH-RICHFORD
PROJECT NUMBER:	STP 2969(I)
FILE NAME:	z16vi04bdr.dgn
PROJECT LEADER:	G. EDWARDS
DESIGNED BY:	G. BURGMEIER
PLAN SHEET 63	
PLOT DATE:	4/2/2018
DRAWN BY:	G. BURGMEIER
CHECKED BY:	J. LITTLE
SHEET 93 OF 222	