

MILLED RUMBLE STRIPS (CENTERLINE)
 STA. B 127+00 TO B 128+97, CL
 STA. B 129+37 TO B 132+00, CL

STONE FILL, TYPE I
 SLOPE EROSION PREVENTION WITH GUARDRAIL:
 STA. B 127+00 TO B 127+16, LT
 STA. B 127+00 TO B 128+08, RT
 (SEE SHEET 19)

STEEL BEAM GUARDRAIL, GALVANIZED
 STA. B 127+00.0 TO B 127+16.0, LT
 STA. B 127+00.0 TO B 128+07.5, RT

ANCHOR FOR STEEL BEAM RAIL
 STA. B 127+16.0, LT
 STA. B 128+07.5, RT

REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. B 127+00.0 TO B 128+16.5, RT
 STA. B 127+00.0 TO B 128+16.0, LT

DURABLE 4 INCH WHITE LINE, (OPTION CC BID ITEMS)
TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADII FOR SIDE ROADS)
 STA. B 127+00 TO B 132+00, SOLID LT & RT
 STA. B 129+17, SOLID LT (EDGE LINES, KING ROAD TH-29)
 STA. B 129+17, SOLID RT (EDGE LINES, RIVER RD. TH-46)



DURABLE 4 INCH YELLOW LINE, (OPTION DD BID ITEMS)
TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
 STA. B 127+00 TO B 128+83, DASHED LT, SOLID RT
 STA. B 128+83 TO B 132+00, SOLID LT & RT
 STA. B 129+17, DOUBLE SOLID LT (KING RD. TH-29)
 STA. B 129+17, DOUBLE SOLID RT (RIVER RD. TH-46)

DURABLE 24 INCH STOP BAR, (OPTION FF BID ITEMS)
TEMPORARY 24 INCH STOP BAR, PAINT
 STA. B 129+17, LT (KING RD. TH-29)
 STA. B 129+17, RT (RIVER RD. TH-46)

DURABLE LETTER OR SYMBOL, (OPTION GG BID ITEMS)
TEMPORARY LETTER OR SYMBOL, PAINT
 STA. B 129+17, LT "STOP" (KING RD. TH-29)
 STA. B 129+17, RT "STOP" (RIVER RD. TH-46)

REMOVING SIGNS
 AS SHOWN - 8

ERECTING SALVAGED SIGNS
 AS SHOWN - 3

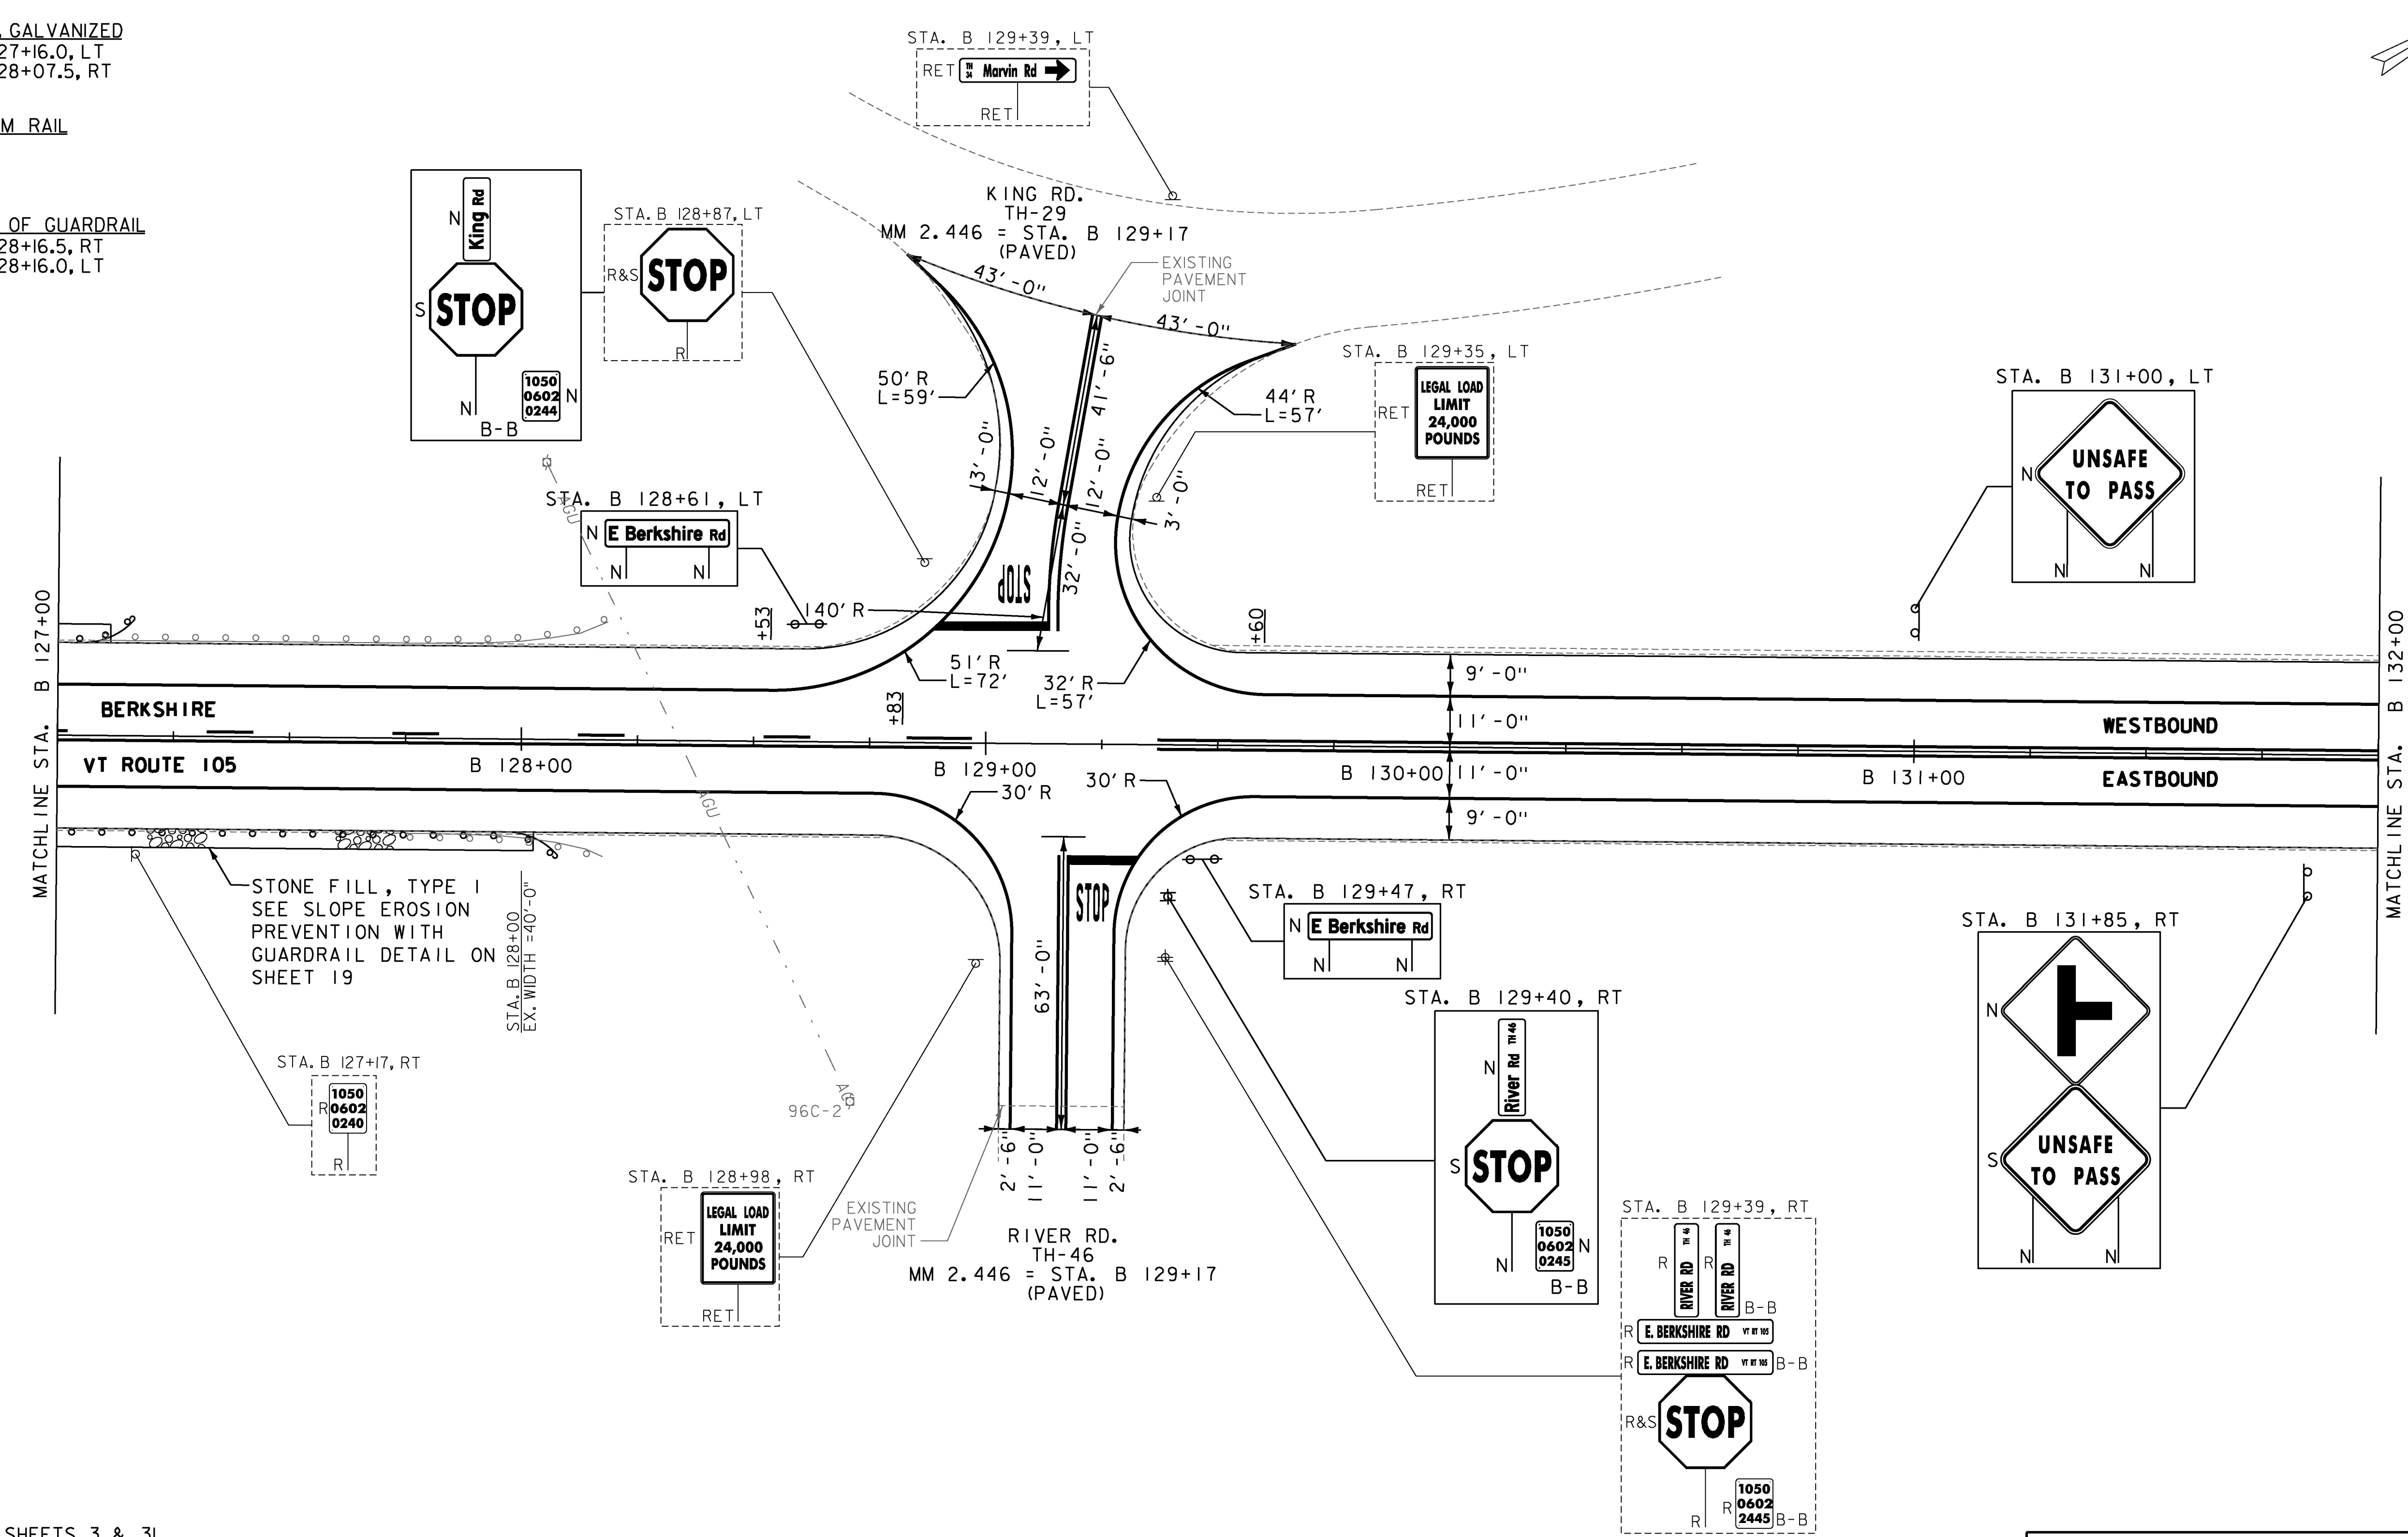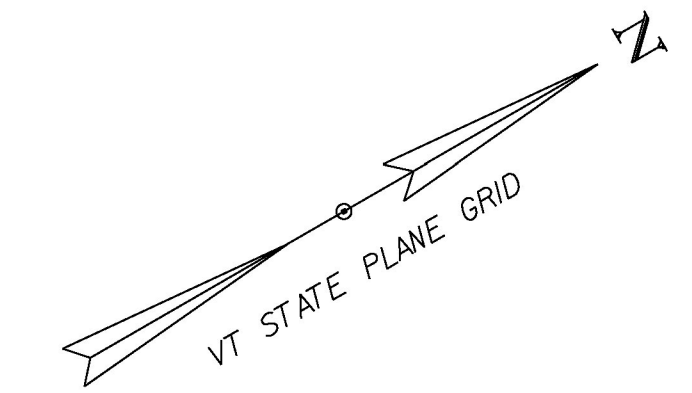

- NOTES:**
- FOR LEGENDS, SEE SHEETS 3 & 3I.
 - ALL EXISTING SIGNS NOT SHOWN ON THE PLANS SHALL BE RETAINED.
 - ALL UTILITY LOCATIONS SHOWN ARE APPROXIMATE AND SHOULD BE VERIFIED PRIOR TO ANY WORK COMMENCING.



PROJECT NAME:	ENOSBURGH-RICHFORD
PROJECT NUMBER:	STP 2969(I)
FILE NAME:	z16vi04bdr.dgn
PROJECT LEADER:	G. EDWARDS
DESIGNED BY:	G. BURGMEIER
PLAN SHEET 66	
PLOT DATE:	4/2/2018
DRAWN BY:	G. BURGMEIER
CHECKED BY:	J. LITTLE
SHEET 96	OF 222

