

MILLED RUMBLE STRIPS (CENTERLINE)
STA. B 132+00 TO B 137+00, CL

HD STEEL BEAM GUARDRAIL, GALVANIZED
STA. B 133+68.75 TO B 134+00.0, RT
STA. B 133+68.75 TO B 134+00.0, LT
STA. B 135+72.5 TO B 136+03.75, RT
STA. B 135+72.5 TO B 136+03.75, LT

DURABLE 4 INCH WHITE LINE, (OPTION CC BID ITEMS)
TEMPORARY 4 INCH WHITE LINE, PAINT
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
AND RADII FOR SIDE ROADS)
STA. B 132+00 TO B 137+00, SOLID LT & RT

DURABLE 4 INCH YELLOW LINE, (OPTION DD BID ITEMS)
TEMPORARY 4 INCH YELLOW LINE, PAINT
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
STA. B 132+00 TO B 137+00, SOLID LT & RT

REMOVING SIGNS
AS SHOWN - 4

ERECTING SALVAGED SIGNS
AS SHOWN - 2

STONE FILL, TYPE J

SLOPE EROSION PREVENTION WITH GUARDRAIL:
STA. B 132+38 TO B 134+00, RT
STA. B 132+75 TO B 134+00, LT
STA. B 135+73 TO B 137+00, RT
STA. B 135+73 TO B 137+00, LT
(SEE SHEET I9)

REMOVAL AND DISPOSAL OF GUARDRAIL



STA. B 132+25.0 TO B 134+00.0, RT
STA. B 132+25.0 TO B 134+00.0, LT
STA. B 135+72.5 TO B 137+00.0, RT
STA. B 135+72.5 TO B 137+00.0, LT

STEEL BEAM GUARDRAIL, GALVANIZED

STA. B 132+37.5 TO B 133+68.75, RT
STA. B 132+75.0 TO B 133+68.75, LT
STA. B 136+03.75 TO B 137+00.0, RT
STA. B 136+03.75 TO B 137+00.0, LT

ANCHOR FOR STEEL BEAM RAIL

STA. B 132+37.5, RT
STA. B 132+75.0, LT

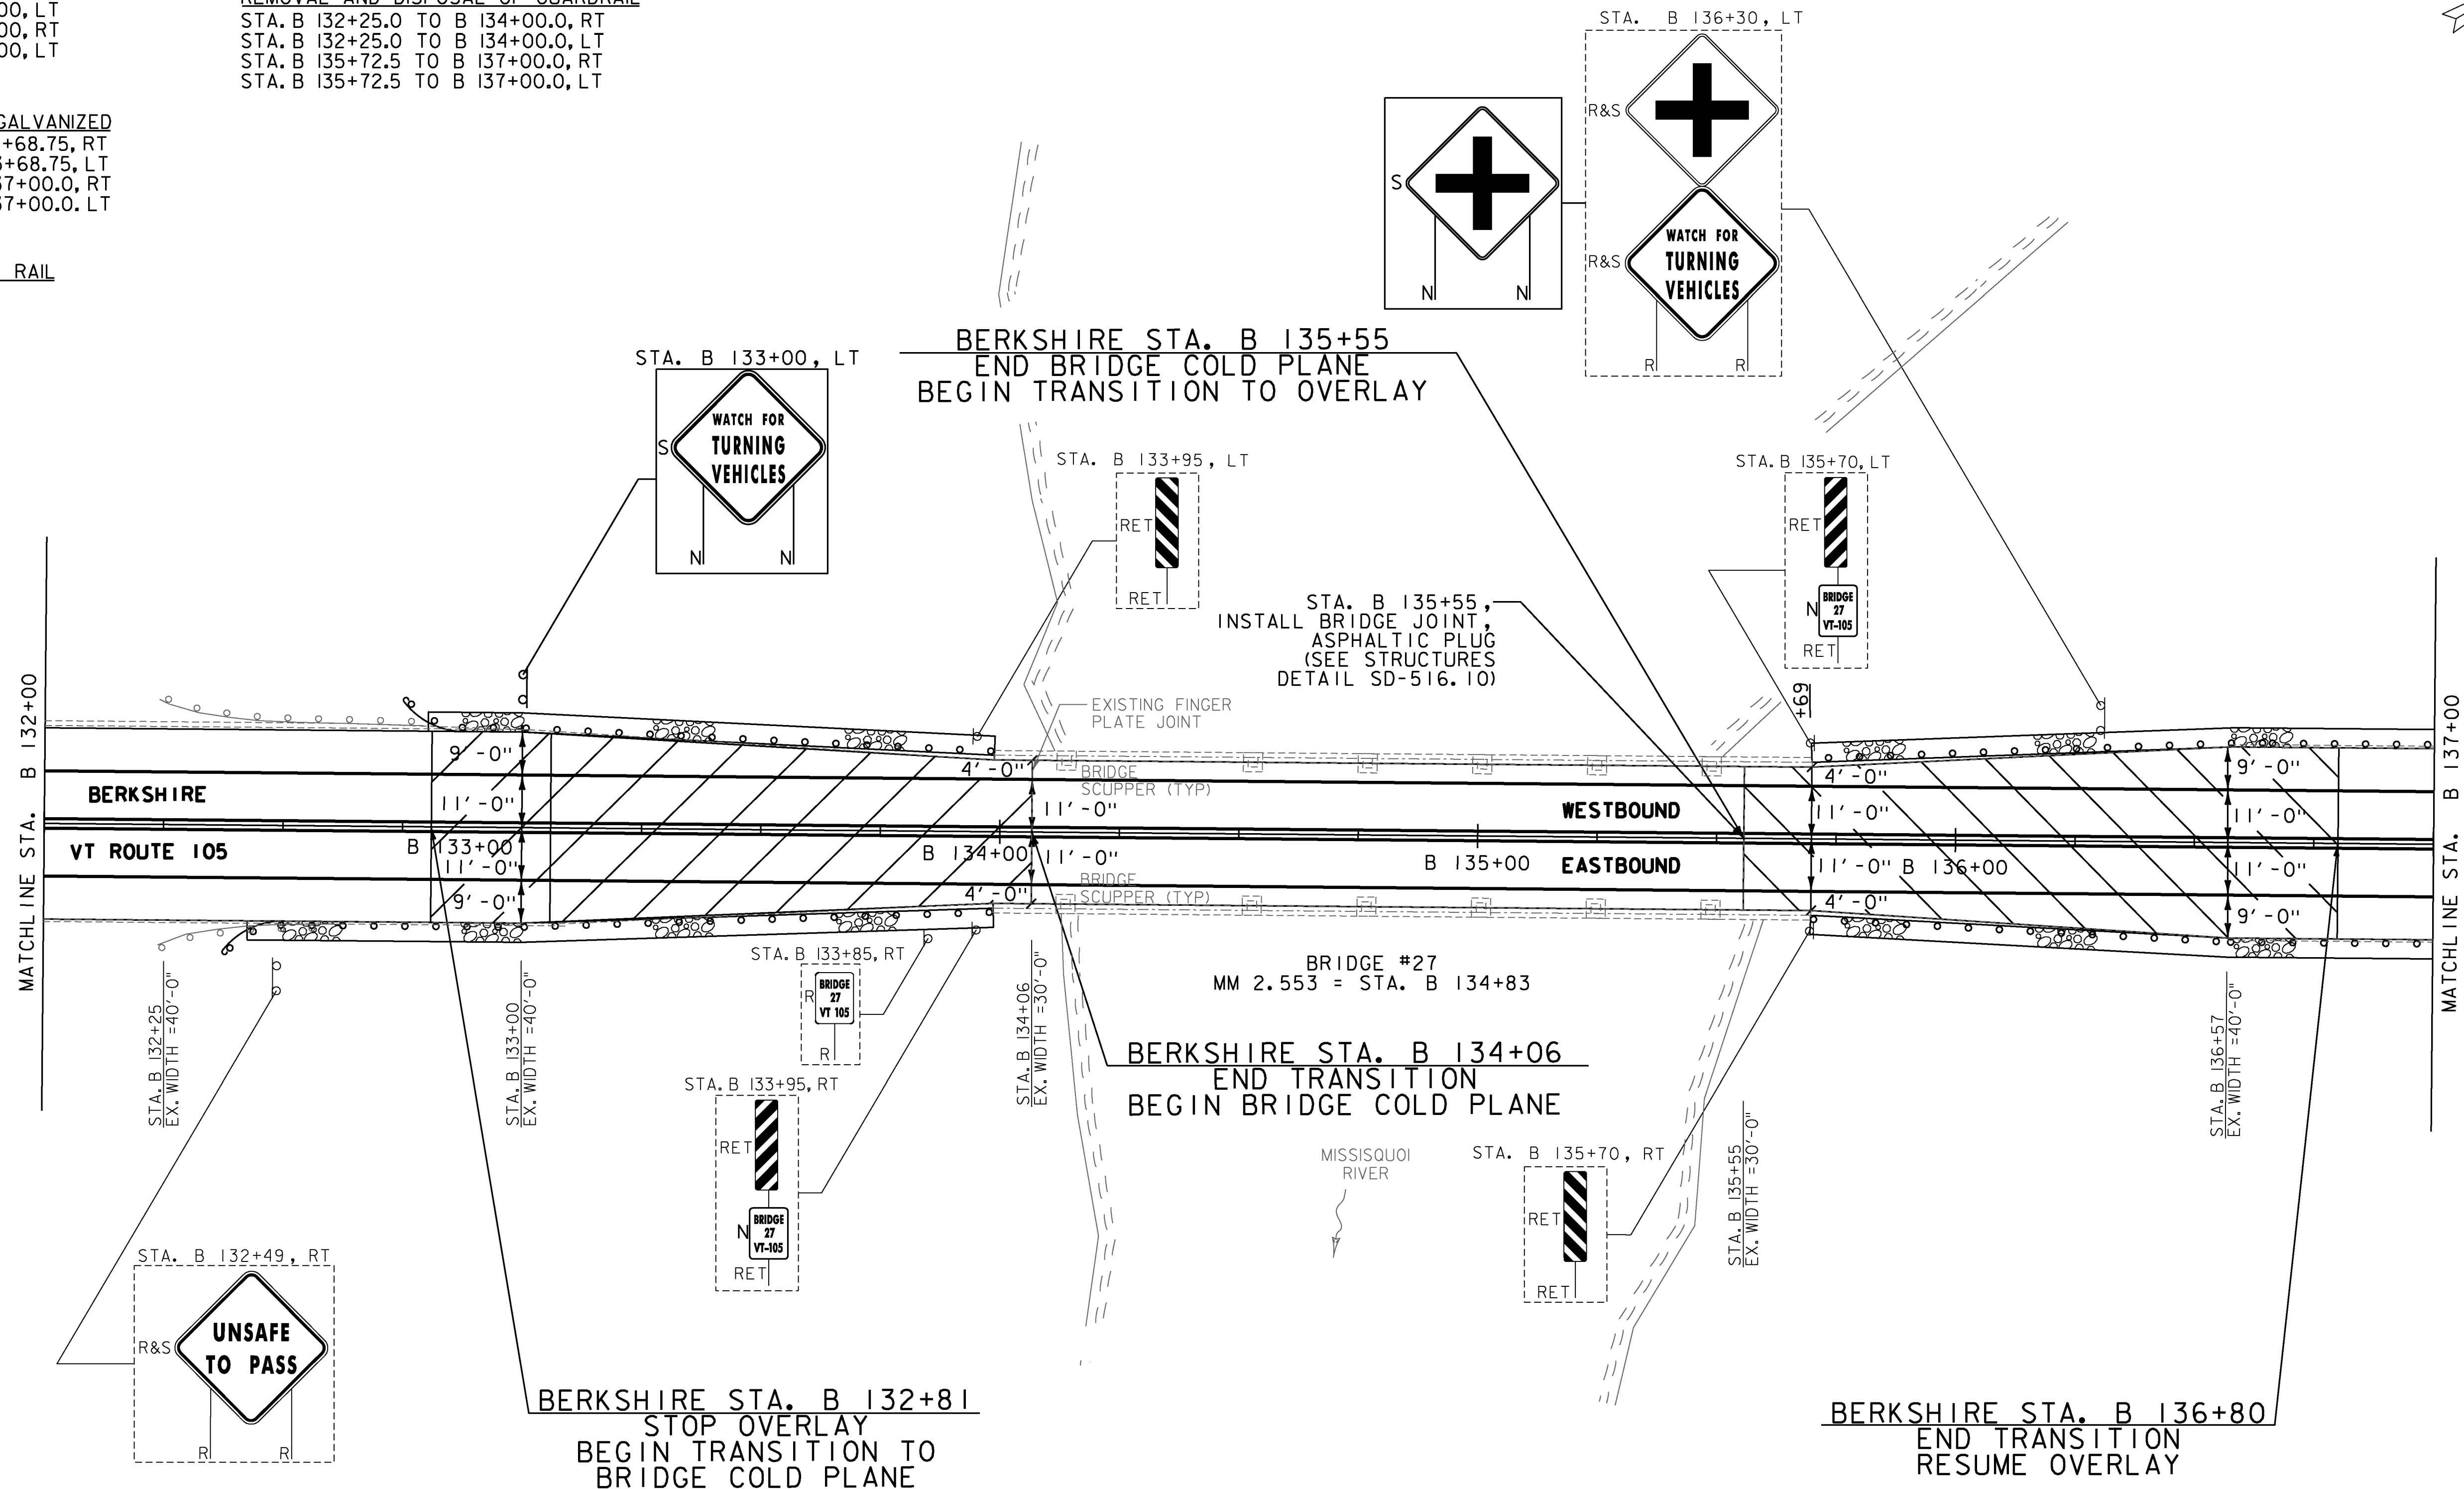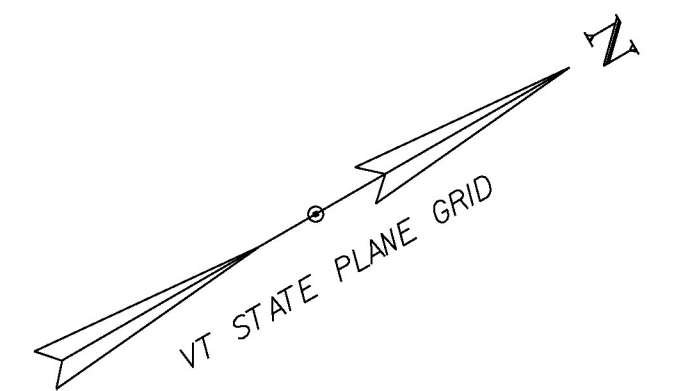

NOTES:

1. FOR LEGENDS, SEE SHEETS 3 & 3I.
2. ALL EXISTING SIGNS NOT SHOWN ON THE PLANS SHALL BE RETAINED.
3. ALL UTILITY LOCATIONS SHOWN ARE APPROXIMATE AND SHOULD BE VERIFIED PRIOR TO ANY WORK COMMENCING.



PROJECT NAME:	ENOSBURGH-RICHFORD
PROJECT NUMBER:	STP 2969(I)
FILE NAME:	z16vi04bdr.dgn
PROJECT LEADER:	G. EDWARDS
DESIGNED BY:	G. BURGMEIER
PLAN SHEET 67	
PLOT DATE:	4/2/2018
DRAWN BY:	G. BURGMEIER
CHECKED BY:	J. LITTLE
SHEET 97 OF 222	

