

TEMPORARY 4 INCH WHITE LINE, PAINT
 4 INCH WHITE LINE, WATERBORNE PAINT
 (ALL LINES WILL INCLUDE EDGE LINE
 BREAKS AND RADII FOR SIDE ROADS)
 198+00 TO 226+00 LT & RT (SOLID)

TEMPORARY 4 INCH YELLOW LINE, PAINT
 4 INCH YELLOW LINE, WATERBORNE PAINT
 (ALL LINES WILL INCLUDE $\frac{1}{2}$
 BREAKS FOR SIDE ROADS)
 198+00 TO 226+00 LT & RT (SOLID)

STEEL BEAM GUARDRAIL, GALVANIZED

200+71.5 TO 201+09 RT
 203+03 TO 203+40.5 LT
 206+66 TO 207+03.5 RT
 209+34.5 TO 209+72 LT
 210+64.5 TO 211+02 RT
 220+01 TO 220+38.5 RT
 223+69.5 TO 224+07 LT

ANCHOR FOR STEEL BEAM RAIL

200+96.5 RT
 203+15.5 LT
 206+78.5 RT
 209+59.5 LT
 210+89.5 RT
 220+13.5 RT
 223+94.5 LT

TREATED TIMBER CURB

205+78 TO 206+53 LT
 207+03 TO 208+03 LT
 208+53 TO 209+34.5 LT

ADJUST HEIGHT OF GUARDRAIL

198+63 TO 199+88 RT
 200+34 TO 200+71.5 RT
 203+40.5 TO 205+03 LT
 205+78 TO 206+53 LT
 207+03 TO 208+03 LT
 207+03.5 TO 208+03.5 RT
 208+53 TO 209+34.5 LT
 209+53.5 TO 209+78.5 RT
 220+38.5 TO 220+63.5 RT
 220+88.5 TO 221+38.5 RT
 221+60 TO 221+72.5 LT
 222+13.5 TO 222+30 RT
 223+09.5 TO 223+34.5 RT

REPLACE GUARDRAIL POST ASSEMBLY


REPLACE GUARDRAIL BEAM UNIT
 223+59.5 TO 224+09.5 RT

REMOVAL AND DISPOSAL OF GUARDRAIL

200+71.5 TO 201+09 RT
 203+03 TO 203+40.5 LT
 206+66 TO 207+03.5 RT
 209+34.5 TO 209+72 LT
 210+64.5 TO 211+02 RT
 220+01 TO 220+38.5 RT
 223+69.5 TO 224+07 LT

DELINEATOR WITH STEEL POST

201+09 RT
 203+03 LT
 206+66 RT
 209+72 LT
 211+02 RT
 220+01 RT
 221+60 LT
 222+22 RT
 222+72 RT
 224+07 LT

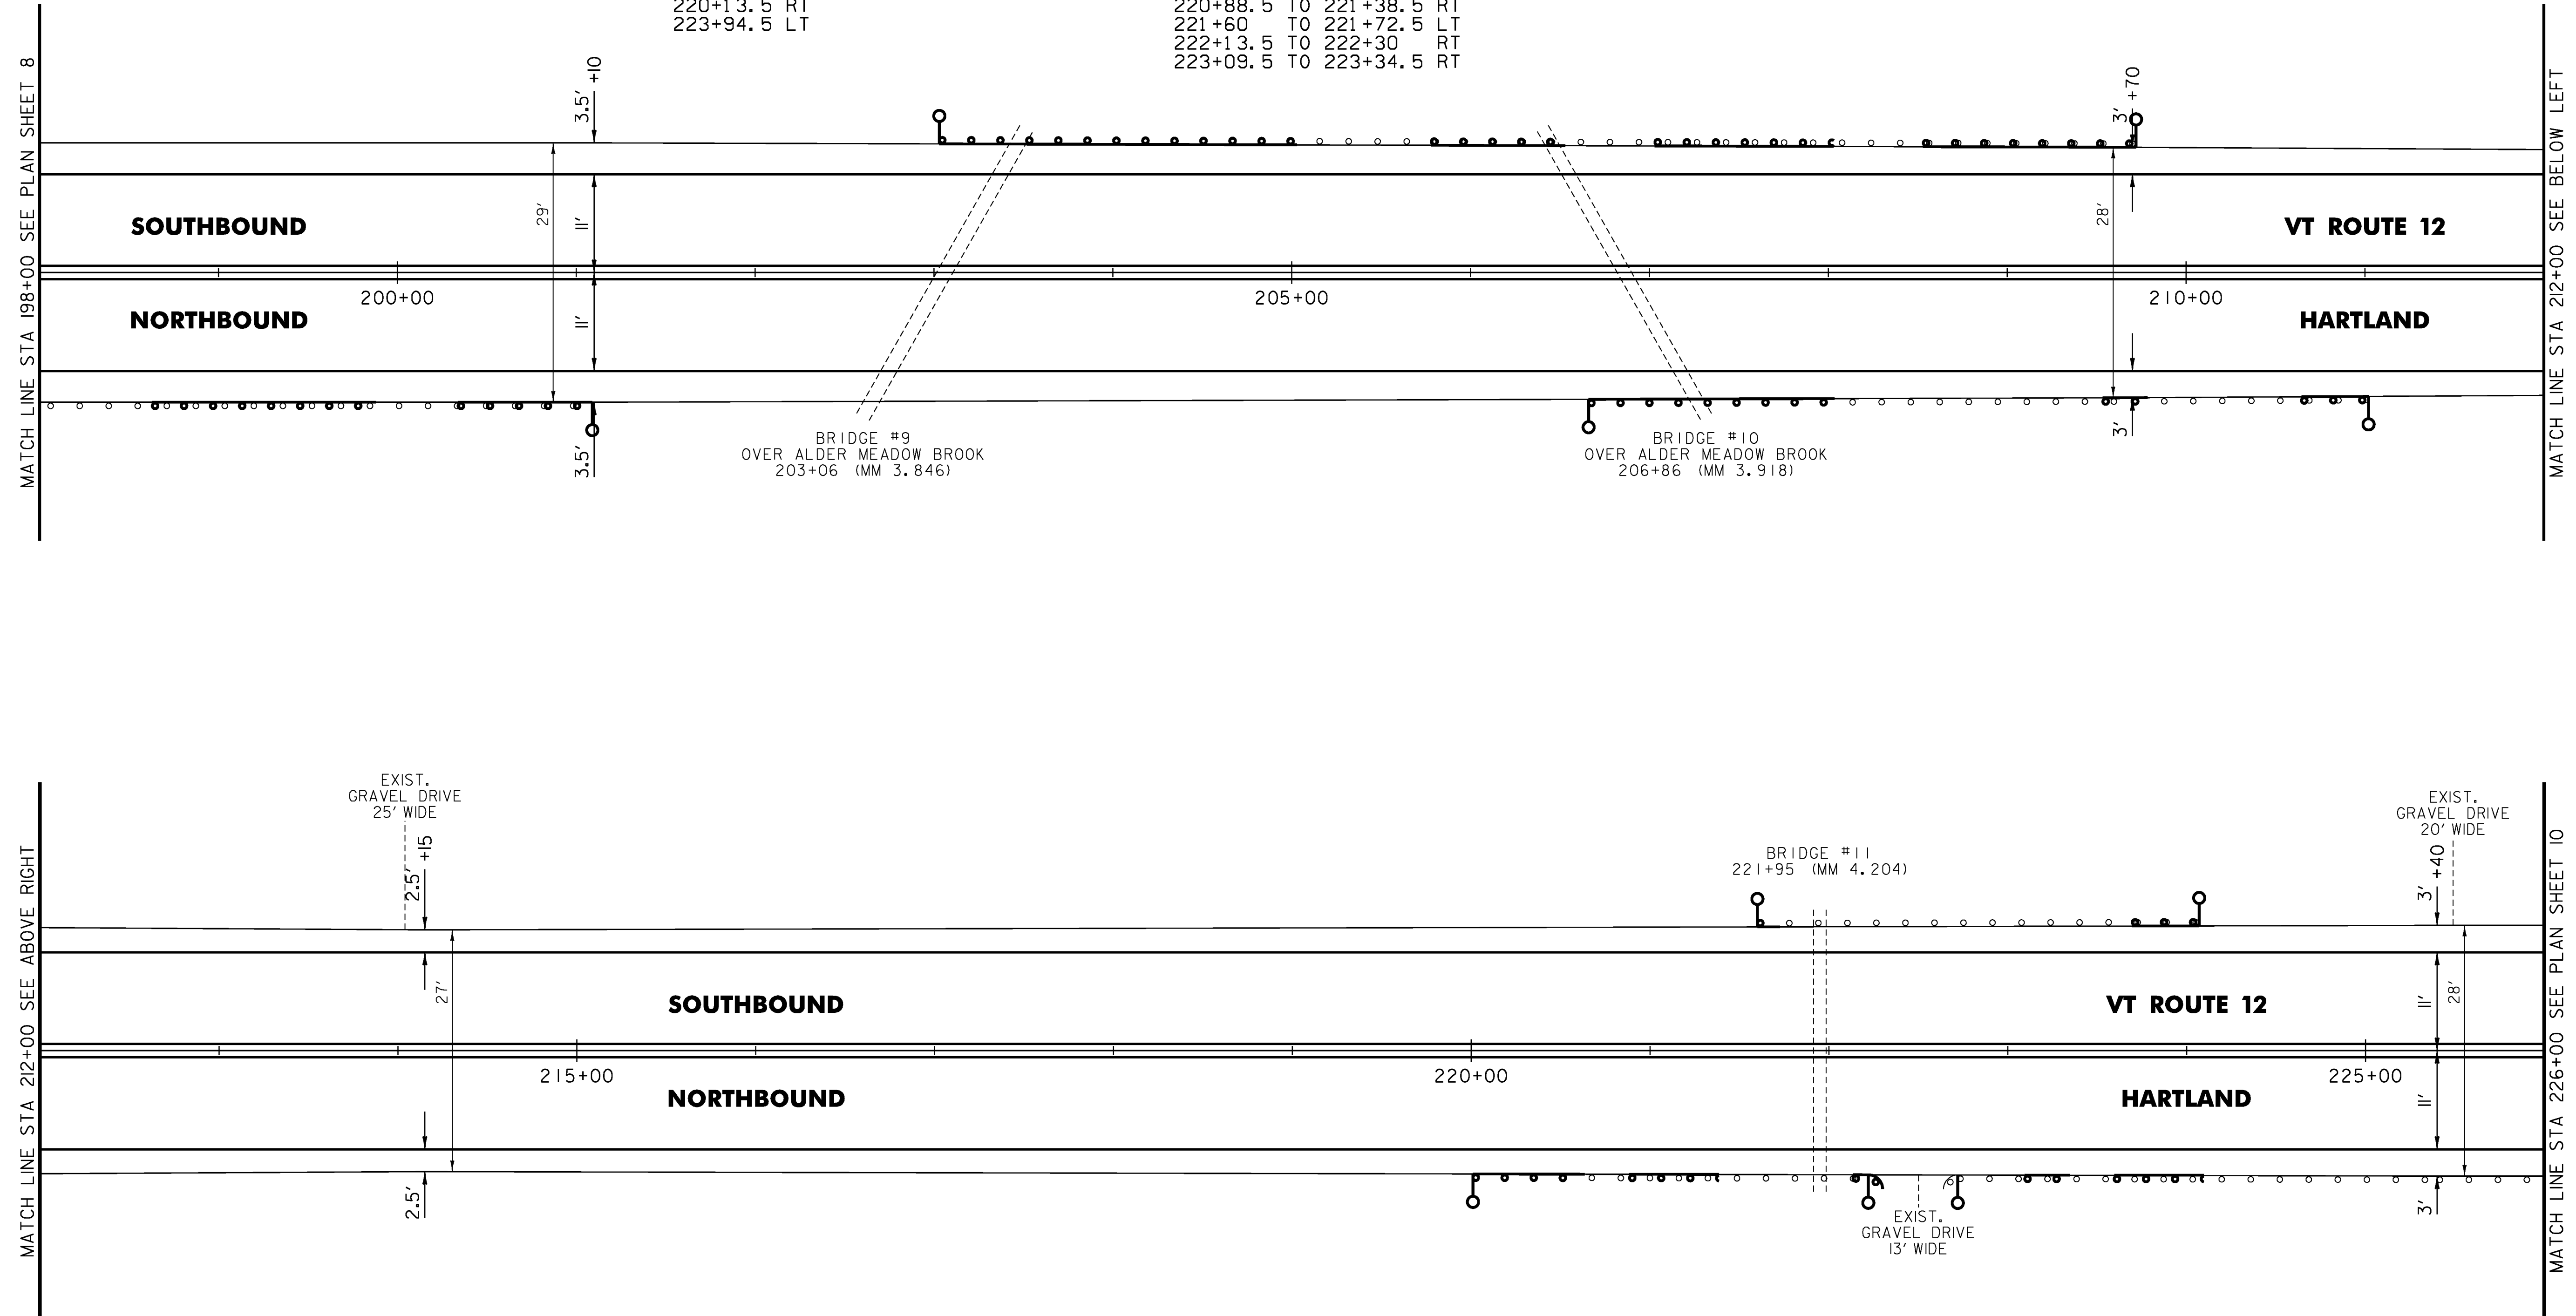

PROJECT NAME:	HARTLAND	PLOT DATE:	4/14/2017
PROJECT NUMBER:	STP FPAV(8)	DRAWN BY:	S. GOODWIN
FILE NAME:	z16vl47bdr.dgn	CHECKED BY:	P. SHEDD
DESIGNED BY:	N. LEMAY	PLAN SHEET 9	SHEET 24 OF 33

NOT TO SCALE