


4 INCH YELLOW LINE, WATERBORNE PAINT  
 0+26 TO 1+36 SOLID RT & LT  
 1+76 TO 8+57 SOLID RT & LT  
 8+57 TO 11+00 SOLID RT & LT  
 TEMPORARY 4 INCH YELLOW LINE, PAINT  
 0+26 TO 1+36 SOLID RT & LT  
 1+76 TO 8+57 SOLID RT & LT  
 8+57 TO 11+00 SOLID RT & LT

4 INCH WHITE LINE, WATERBORNE PAINT  
 0+16 TO 1+12 SOLID LT  
 0+28 TO 8+25 SOLID RT  
 2+06 TO 11+00 SOLID LT  
 9+31 TO 11+00 SOLID RT  
 TEMPORARY 4 INCH WHITE LINE, PAINT  
 0+16 TO 1+12 SOLID LT  
 0+28 TO 8+25 SOLID RT  
 2+06 TO 11+00 SOLID LT  
 9+31 TO 11+00 SOLID RT

24 INCH STOP BAR, WATERBORNE PAINT  
 0+26 LT  
 TEMPORARY 24 INCH STOP BAR, PAINT  
 0+26 LT

DURABLE LETTER OR SYMBOL, WATERBORNE PAINT  
 0+36 LT "S,T,O,P" 4 EACH  
 10+00 LT "S,T,O,P" 4 EACH  
 10+25 LT "A,H,E,A,D" 5 EACH  
 TEMPORARY LETTER OR SYMBOL, PAINT  
 0+36 LT "S,T,O,P" 4 EACH  
 10+00 LT "S,T,O,P" 4 EACH  
 10+25 LT "A,H,E,A,D" 5 EACH  
 SPECIAL PROVISION (DECOMMISSION CURB DROP INLET)  
 4+50 LT 1 EACH  
 6+95 LT 1 EACH

STEEL BEAM GUARDRAIL, GALVANIZED  
 1+78 TO 7+07 LT  
 REMOVAL AND DISPOSAL OF GUARDRAIL  
 1+78 TO 7+96 LT  
 ANCHOR FOR STEEL BEAM RAIL  
 1 (SEE STANDARD G-1D)  
 DELINEATOR WITH STEEL POST  
 7+07 LT  
 STONE FILL, TYPE I  
 2+06 TO 6+75 LT

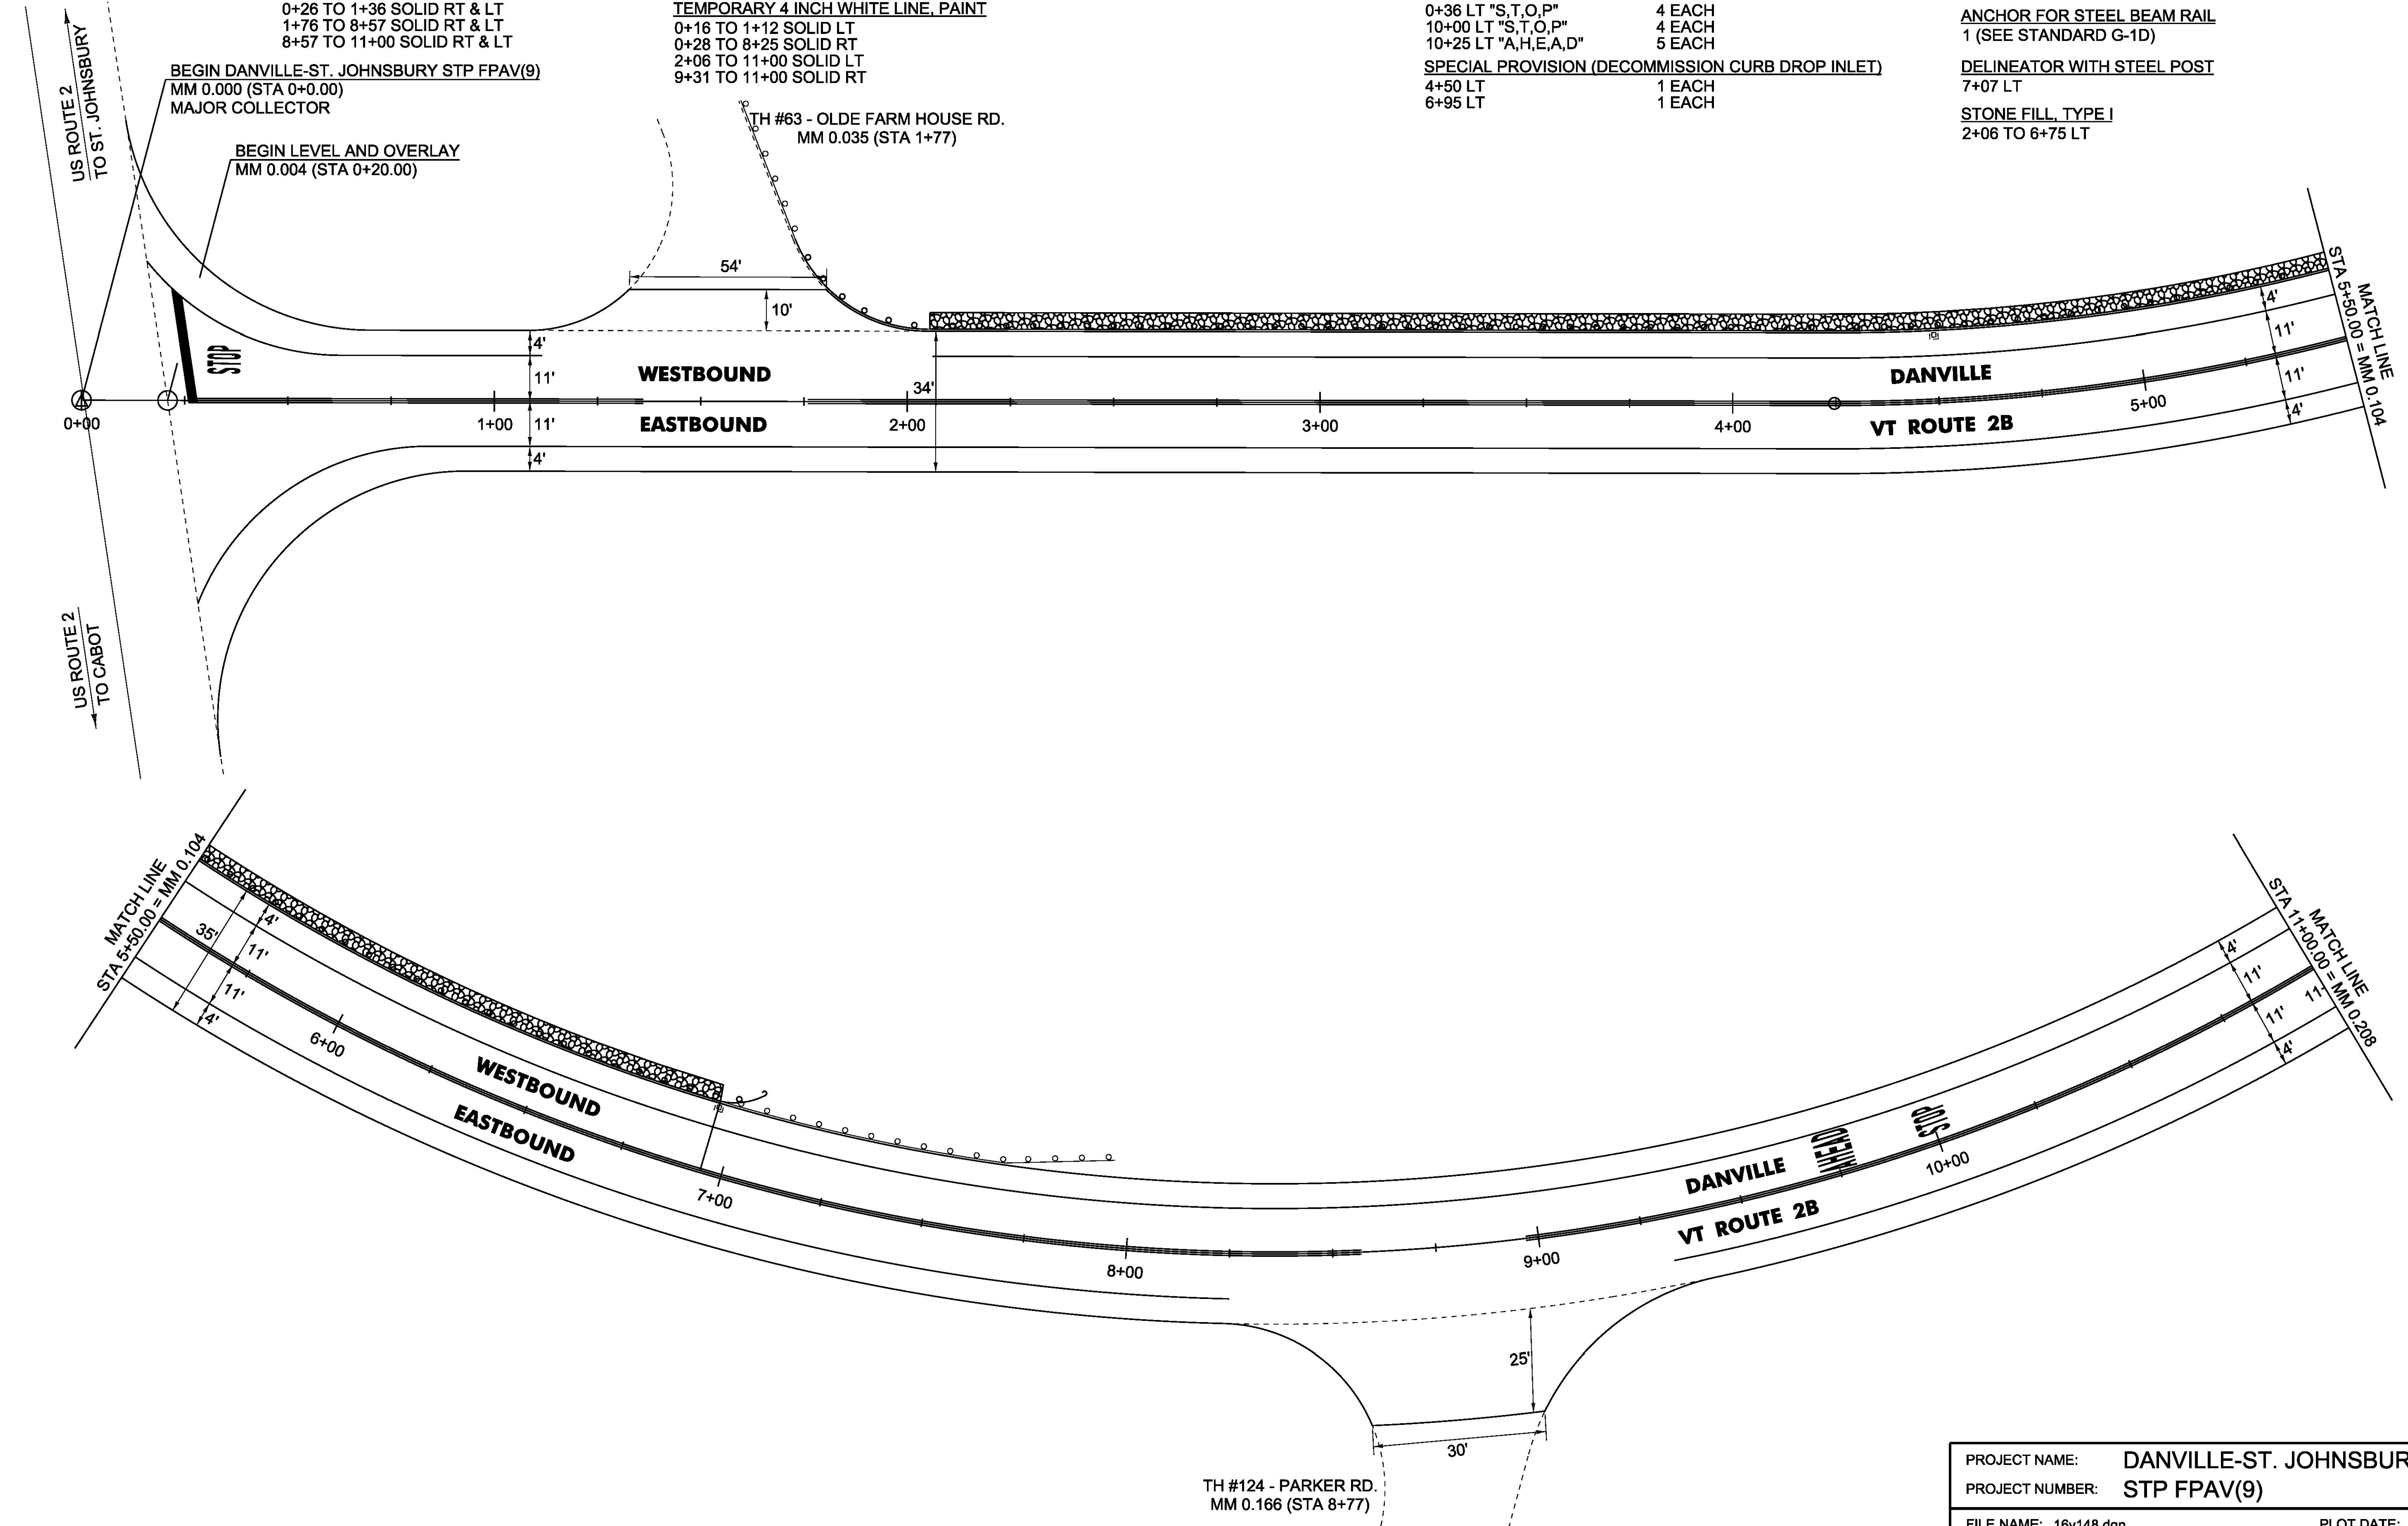

NOT TO SCALE

PROJECT NAME:	DANVILLE-ST. JOHNSBURY	PLOT DATE:	05-JUN-2017
PROJECT NUMBER:	STP FPAV(9)	DRAWN BY:	B. KIPP
FILE NAME:	16v148.dgn	CHECKED BY:	M. FOWLER
PROJECT LEADER:	B. KIPP	SHEET	16 OF 33
DESIGNED BY:	B. KIPP		
PLAN SHEET 1			