

**GEOTEXTILE FOR SILT FENCE, WOVEN WIRE REINFORCED**

STA 10+08 LT  
 STA 10+47 - 11+13 LT  
 STA 11+11 - 11+35 LT  
 STA 11+34 - 11+51 LT  
 STA 11+52 - 12+50 LT  
 STA 13+45 LT  
 STA 13+75 LT  
 STA 14+10 LT  
 STA 14+66 LT  
 STA 15+22 - 15+33 LT  
 STA 15+49 - 16+00 LT

**TEMPORARY EROSION MATTING**

STA 12+25 TO 16+00 RT  
 STA 12+25 TO 13+25 LT

**TEMPORARY STONE CHECK DAM, TYPE I**

STA 11+65 - 12+00 RT  
 STA 13+50 - 16+00 RT  
 STA 13+55 - 16+00 LT

**INLET PROTECTION DEVICE, TYPE I**



STA 9+43 RT (PIPE INLET PROTECTION)  
 STA 11+32 RT (PIPE INLET PROTECTION)

**BARRIER FENCE**

STA 9+60 - 12+58 LT  
 STA 12+62 - 14+37 LT  
 STA 11+56 - 16+00 RT  
 STA 15+51 - 16+00 LT

**PROJECT DEMARCATION FENCE**

STA 9+00 - 9+54 RT  
 STA 9+01 - 9+61 LT  
 STA 9+73 - 11+43 RT  
 STA 14+37 - 15+52 LT

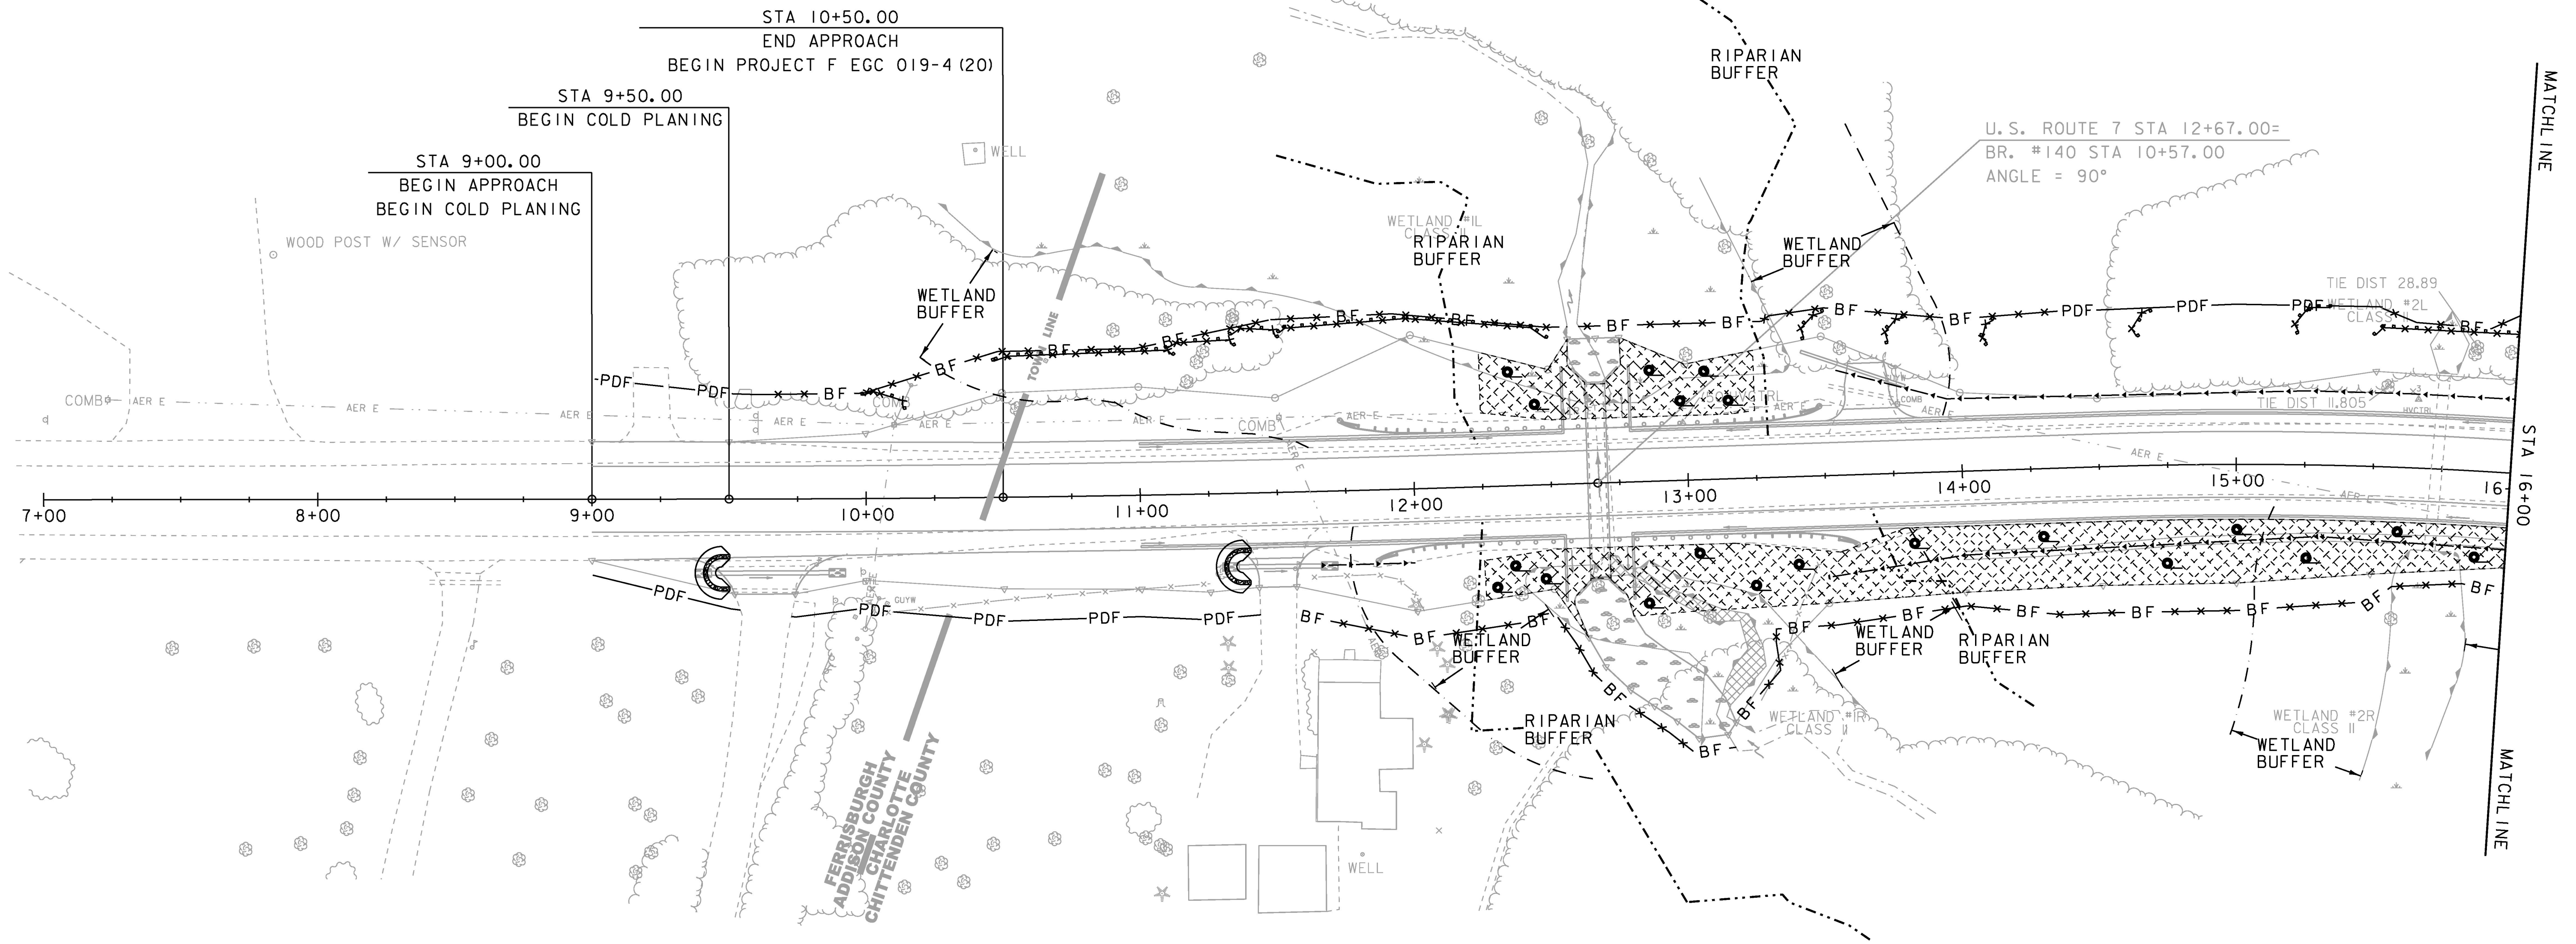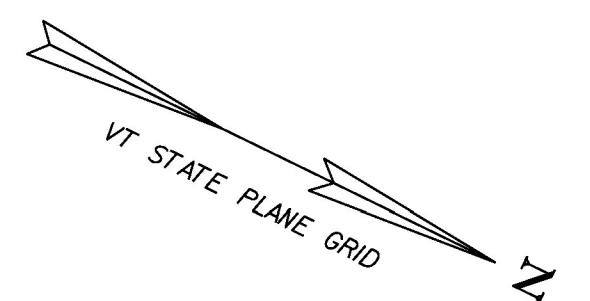

**LEGEND**

- DETOUR SLOPE LIMITS
- STONE & BLOCK DROP, INLET PROTECTION TYPE I
- PIPE INLET PROTECTION, INLET PROTECTION TYPE I



PROJECT NAME:	CHARLOTTE
PROJECT NUMBER:	F EGC 019-4(20)
FILE NAME:	d78d062_ero_construction_bdr.dgn
PLOT DATE:	15-MAR-2016
PROJECT LEADER:	K. UPMAL
DRAWN BY:	N. PAPPAS
DESIGNED BY:	N. PAPPAS
CHECKED BY:	C. LEACH
EPSC CONSTRUCTION SHEET I	SHEET 138 OF 499