

③ STA 0+260 (TH 43)  
 NEW 450 mm X 23 m CSP (1.63 mm) W/ CSPES @ INLET  
 OR RCP CLASS III W/ RCPES @ INLET OR CPEP (SL)  
 W/ CPEPES @ INLET  
 CONSTRUCT 0.9 m X 1.8 m STONE FILL PAD  
 TYPE II @ OUTLET



STEEL BEAM GUARDRAIL  
 STA 0+240.0 TO 0+297.7 LT (TH 43)

ANCHOR FOR STEEL BEAM RAIL  
 STA 0+297.7 LT (TH 43)

CONSTRUCT DRIVE  
 STA 0+285 RT (TH 43) - 5 m WIDE, GRAVEL  
 +320

REMOVING AND RESETTING FENCE  
 STA 0+240 TO 0+300 RT (TH 43)  
 TO INCLUDE REMOVING DRIVE GATE  
 AT STA 0+231 RT AND RESETTING  
 AT STA 0+285 RT

DATUM	
VERTICAL	NGVD 1929
HORIZONTAL	N/A

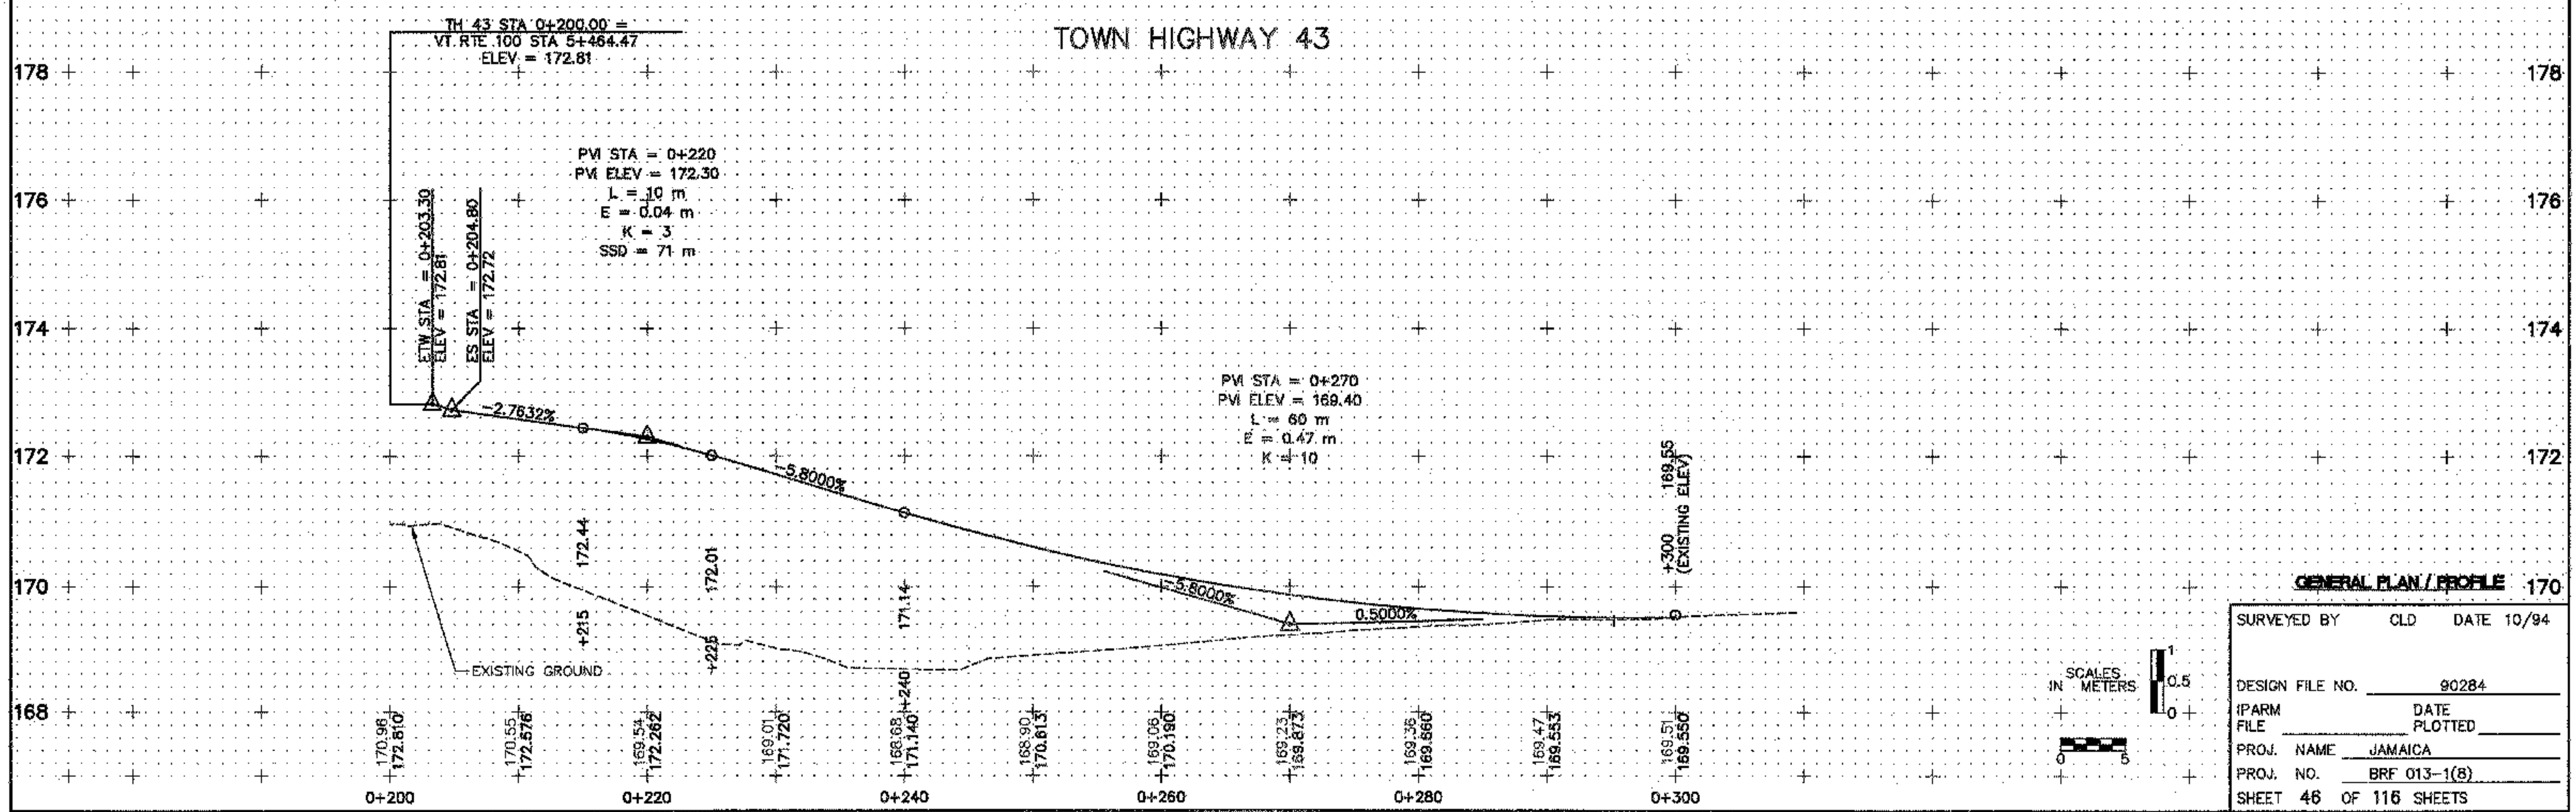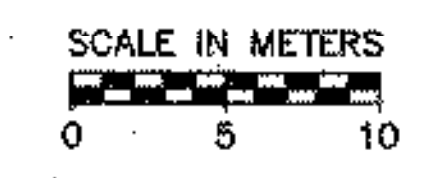

GENERAL PLAN / PROFILE 170

SURVEYED BY	CLD	DATE	10/94
DESIGN FILE NO.	90284		
IPARM FILE	DATE PLOTTED		
PROJ. NAME	JAMAICA		
PROJ. NO.	BRF 013-1(8)		
SHEET	46 OF 116 SHEETS		