


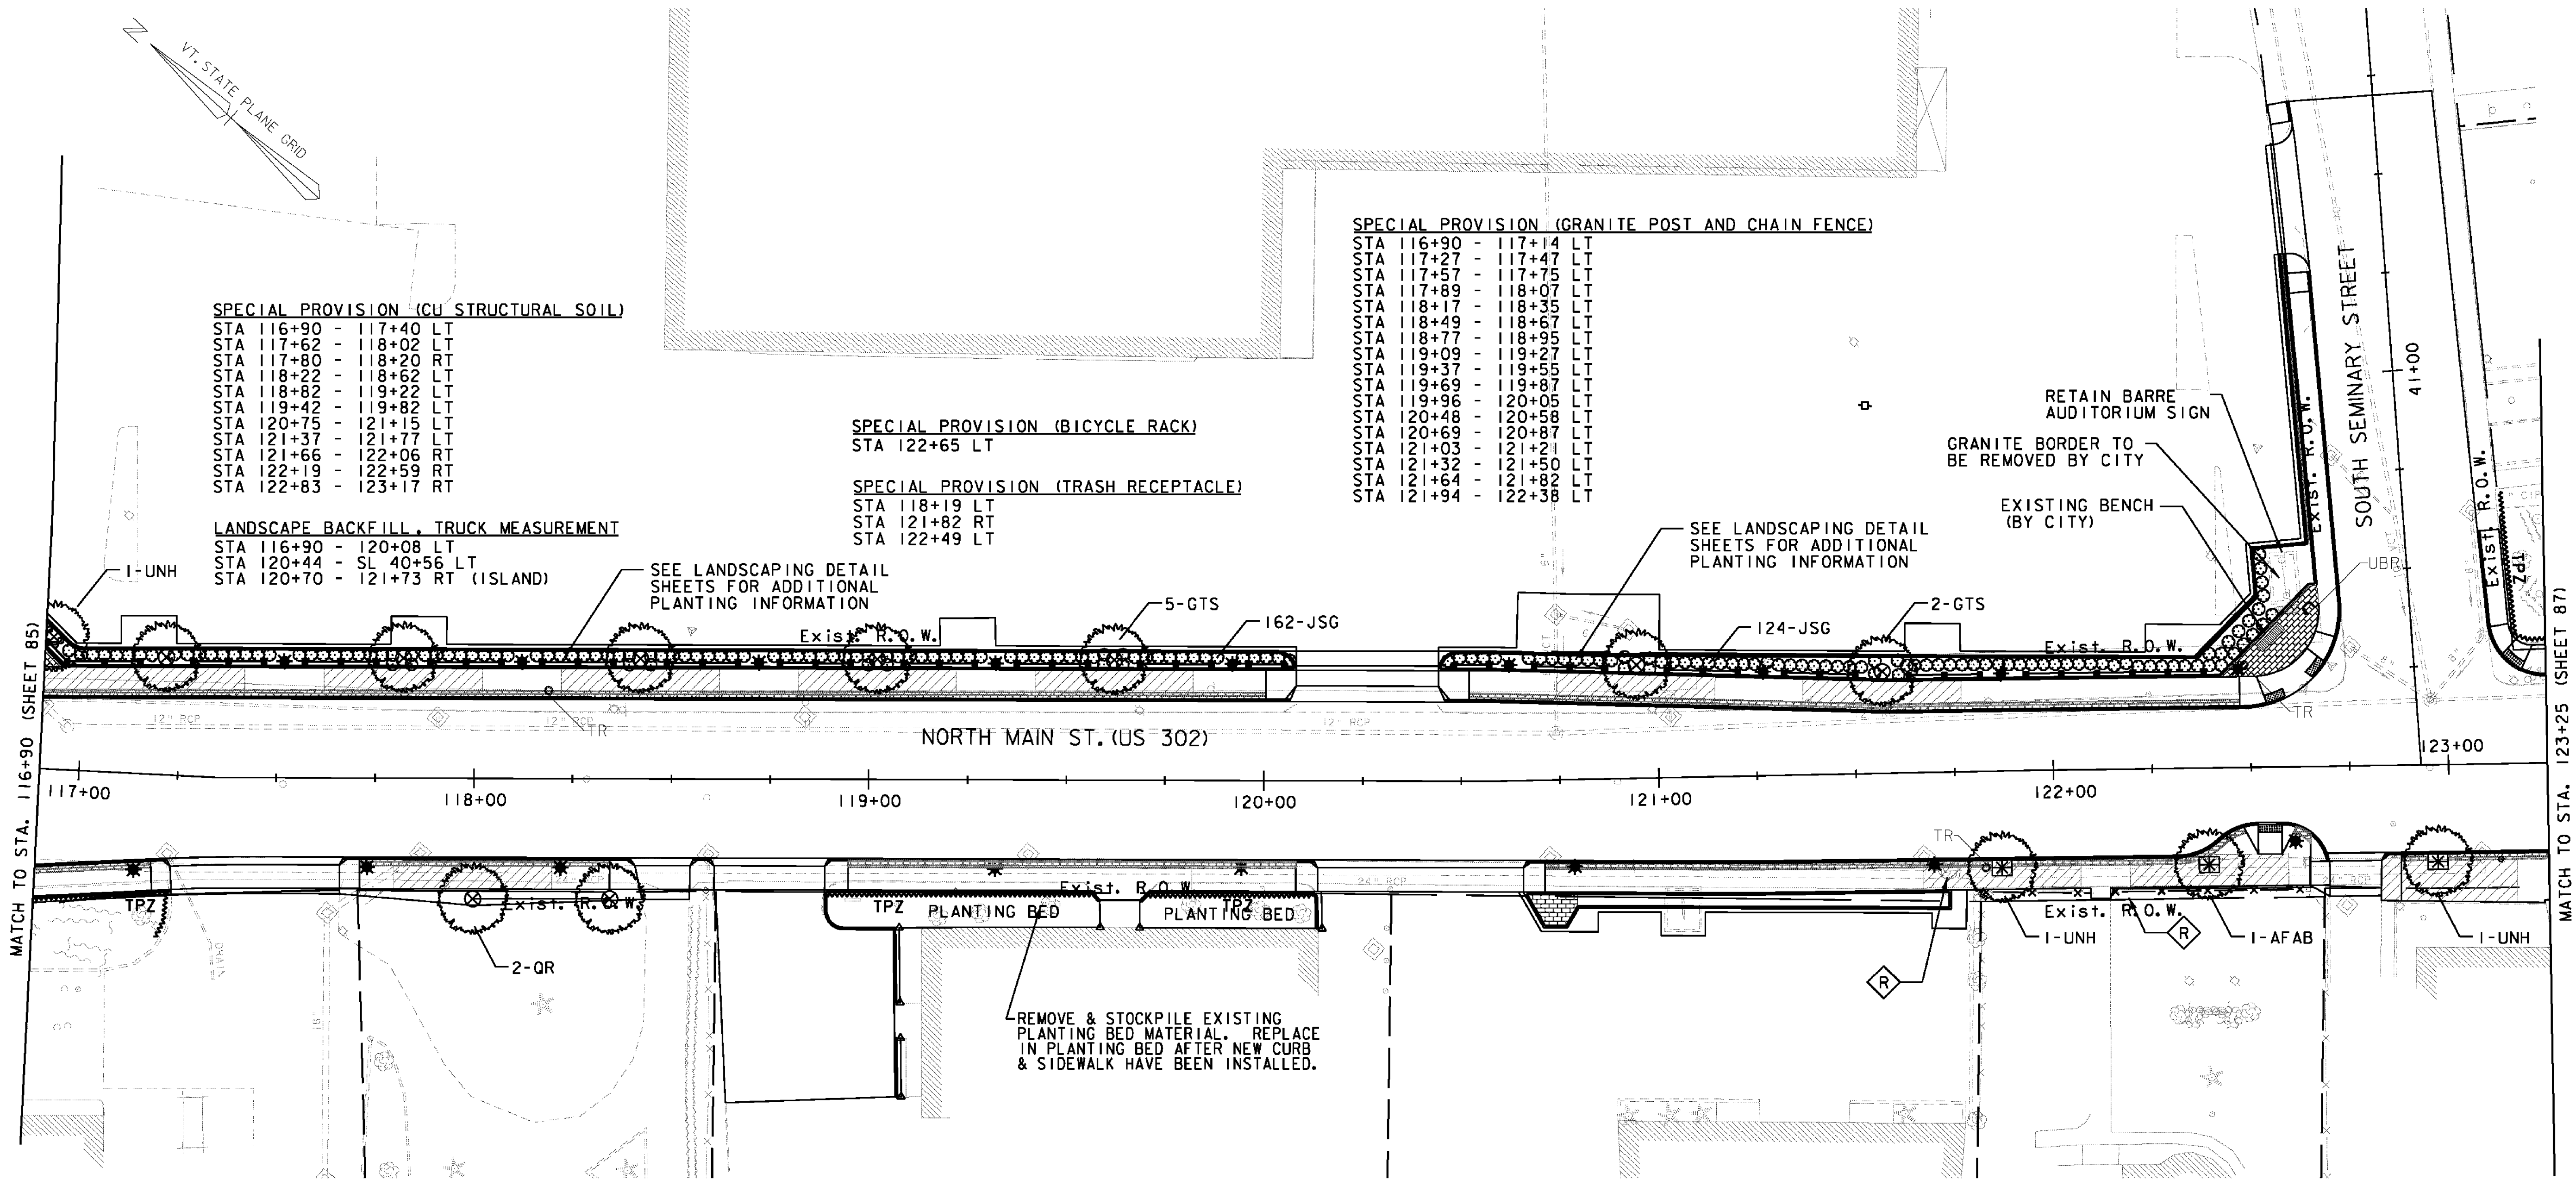

SPECIAL PROVISION (CU STRUCTURAL SOIL)
STA 116+90 - 117+40 LT
STA 117+62 - 118+02 LT
STA 117+80 - 118+20 RT
STA 118+22 - 118+62 LT
STA 118+82 - 119+22 LT
STA 119+42 - 119+82 LT
STA 120+75 - 121+15 LT
STA 121+37 - 121+77 LT
STA 121+66 - 122+06 RT
STA 122+19 - 122+59 RT
STA 122+83 - 123+17 RT

LANDSCAPE BACKFILL, TRUCK MEASUREMENT
STA 116+90 - 120+08 LT
STA 120+44 - SL 40+56 LT
STA 120+70 - 121+73 RT (ISLAND)

SPECIAL PROVISION (BICYCLE RACK)
STA 122+65 LT

SPECIAL PROVISION (TRASH RECEPTACLE)
STA 118+19 LT
STA 121+82 RT
STA 122+49 LT

SPECIAL PROVISION (GRANITE POST AND CHAIN FENCE)
STA 116+90 - 117+14 LT
STA 117+27 - 117+47 LT
STA 117+57 - 117+75 LT
STA 117+89 - 118+07 LT
STA 118+17 - 118+35 LT
STA 118+49 - 118+67 LT
STA 118+77 - 118+95 LT
STA 119+09 - 119+27 LT
STA 119+37 - 119+55 LT
STA 119+69 - 119+87 LT
STA 119+96 - 120+05 LT
STA 120+48 - 120+58 LT
STA 120+69 - 120+87 LT
STA 121+03 - 121+21 LT
STA 121+32 - 121+50 LT
STA 121+64 - 121+82 LT
STA 121+94 - 122+38 LT

RETAIN BARRE
AUDITORIUM SIGN

GRANITE BORDER TO
BE REMOVED BY CITY

EXISTING BENCH
(BY CITY)

LEGEND:

	EXISTING MEDIUM OR LARGE TREE OR STUMP TO BE REMOVED		PROPOSED GRANITE POST AND CHAIN FENCE
	PROPOSED DECIDUOUS TREE (OUTSIDE OF SIDEWALK)		PROPOSED ORNAMENTAL STREET LIGHT
	PROPOSED DECIDUOUS TREE WITH 4' x 5' TREE PIT		TREE PROTECTION ZONE / TPZ
	PROPOSED SHRUB		PROPOSED SIGNAL POLE WITH LUMINAIRE
	COBBLESTONE PAVERS		PROPOSED STEEL BENCH WITH BACK
	IMPRINTED 5" CONCRETE SIDEWALK		PROPOSED STEEL BENCH WITHOUT BACK
	CU STRUCTURAL SOIL		PROPOSED PARKING METER POST
			PROPOSED TRASH RECEPTACLE
			PROPOSED BICYCLE RACK

DECIDUOUS TREES
STA 116+93 LT
STA 117+21 LT
STA 117+82 LT
STA 118+00 RT
STA 118+34 RT
STA 118+42 LT
STA 119+02 LT
STA 119+62 LT
STA 120+95 LT
STA 121+57 LT
STA 121+86 RT
STA 122+39 RT
STA 122+97 RT

EVERGREEN SHRUBS
STA 116+91 - 120+07 LT
STA 120+47 - 122+56 LT
STA 119+00 - 120+00 RT

TREE PROTECTION ZONE/TPZ
STA 116+90 - 117+24 RT
STA 118+89 - 119+57 RT
STA 119+71 - 120+12 RT
SL STA 40+68 RT - STA 123+25 LT

SPECIAL PROVISION (CEDAR BARK MULCH)
STA 119+89 - 120+12 RT

REMOVING MEDIUM STUMPS
STA 122+19 RT

REMOVING MEDIUM TREES
STA 121+73 RT

- NOTES:**
- ALL MUNICIPAL GRANITE BENCHES SHALL BE REMOVED AND RESET BY THE CITY.
 - ALL TREE PROTECTION ZONES SHALL BE PAID AS A LUMP SUM UNDER ITEM 656.85 - TREE PROTECTION.
 - ALL TREES AND NAMED CULTIVARS HAVE BEEN CHECKED AND ALL PATENTS HAVE EXPIRED.

SYMBOL	COMMON NAME	BOTANICAL NAME	QTY.	UNIT	SIZE	SPACING / COMMENTS
GTS	SHADEMASTER HONEYLOCUST	GLEDTISIA TRIACANTHOS INERMIS	7	B&B	2"-2½" CAL	5' TO 6' MIN. BRANCH HT.
UNH	NEW HARMONY AMERICAN ELM	ULMUS AMERICANA NEW HARMONY	3	B&B	2"-2½" CAL	5' TO 6' MIN. BRANCH HT.
JSG	SEAGREEN JUNIPER	JUNIPERUS CHINENSIS SEA GREEN	286	2 GAL.	24"-30" HT.	SPRING PLANTING
OR	NORTHERN RED OAK	QUERCUS RUBRA	2	B&B	2"-2½" CAL	5' TO 6' MIN. BRANCH HT.
AFAB	AUTUMN BLAZE MAPLE	ACER FREMANII X AUTUMN BLAZE	1	B&B	2"-2½" CAL	5' TO 6' MIN. BRANCH HT.

• ALL TREES SHALL BE PLANTED IN THE SPRING



VHB Vanasse Hangen Brustlin, Inc.

PROJECT NAME: BARRE CITY
PROJECT NUMBER: FECC F 026-(K34) C/2

FILE NAME: z85b010bdr_id.C2
PROJECT LEADER: G. BAKOS
DESIGNED BY: D. PECK
LANDSCAPING PLAN #2

PLOT DATE: 3/9/2011
DRAWN BY: D. PECK
CHECKED BY:
SHEET 86 OF 339