

WET POND PLANTING / SEEDING LEGEND


ZONE	PLANTING ELEV.	COMMON NAME	BOTANICAL NAME	UNIT	SIZE	QTY	SPACING COMMENTS
A	583.63 - 584.00	HARD STEM BULLRUSH	SCIRPUS ACUTUS	PEAT POT	2" PLUGS	600	1' O.C.
B	584.00 - 585.50	SOFT STEM BULLRUSH	SCIRPUS VALIDUS	PEAT POT	2" PLUGS	800	1' O.C.
C	585.50 - 586.00	SC WOOL GRASS SEDGE	SCIRPUS CYPERINUS	PEAT POT	2" PLUGS	450	1' O.C.
D	587.00 - 588.00	SWITCH GRASS	PANICUM VIRGATUM	PEAT POT	2" PLUGS	200	1' O.C.
E	BELOW 589.00	WET AREA SEED MIX					
F	ABOVE 589.00	RURAL SEED MIX					

SYMBOL	COMMON NAME	BOTANICAL NAME	QTY.	UNIT	SIZE	SPACING / COMMENTS
CR	GRAY DOGWOOD	CORNUS RACEMOSA	62	2 GAL.	30-36" HT.	4' O.C.
MA	AMUR MAACKIA	MAACKIA AMURENSIS	3	B&B	3/4" - 1 1/2" CAL	SPRING PLANTING

WET AREA SEED MIX

COMMON NAME	LATIN NAME	% MIX
VIRGINIA WILD RYE GRASS	ELYMUS VIRGINICUS	20
FOX SEDGE	CAREX VULPINOIDEA	10
AMERICAN MANNAGRASS	GLYCERIA GRANDIS	20
GIANT BUR-REED	SPARGANIUM EURYCARPUM	10
COMMON THREE-SQUARE	SCIRPUS AMERICANUS	20
SOFT-STEM BULLRUSH	SCIRPUS VALIDUS	10
CANADA RUSH	JUNCUS CANADENSIS	10

RATE OF APPLICATION: 10 LB / ACRE (20 LB/ACRE IF HYDROSEEDING)

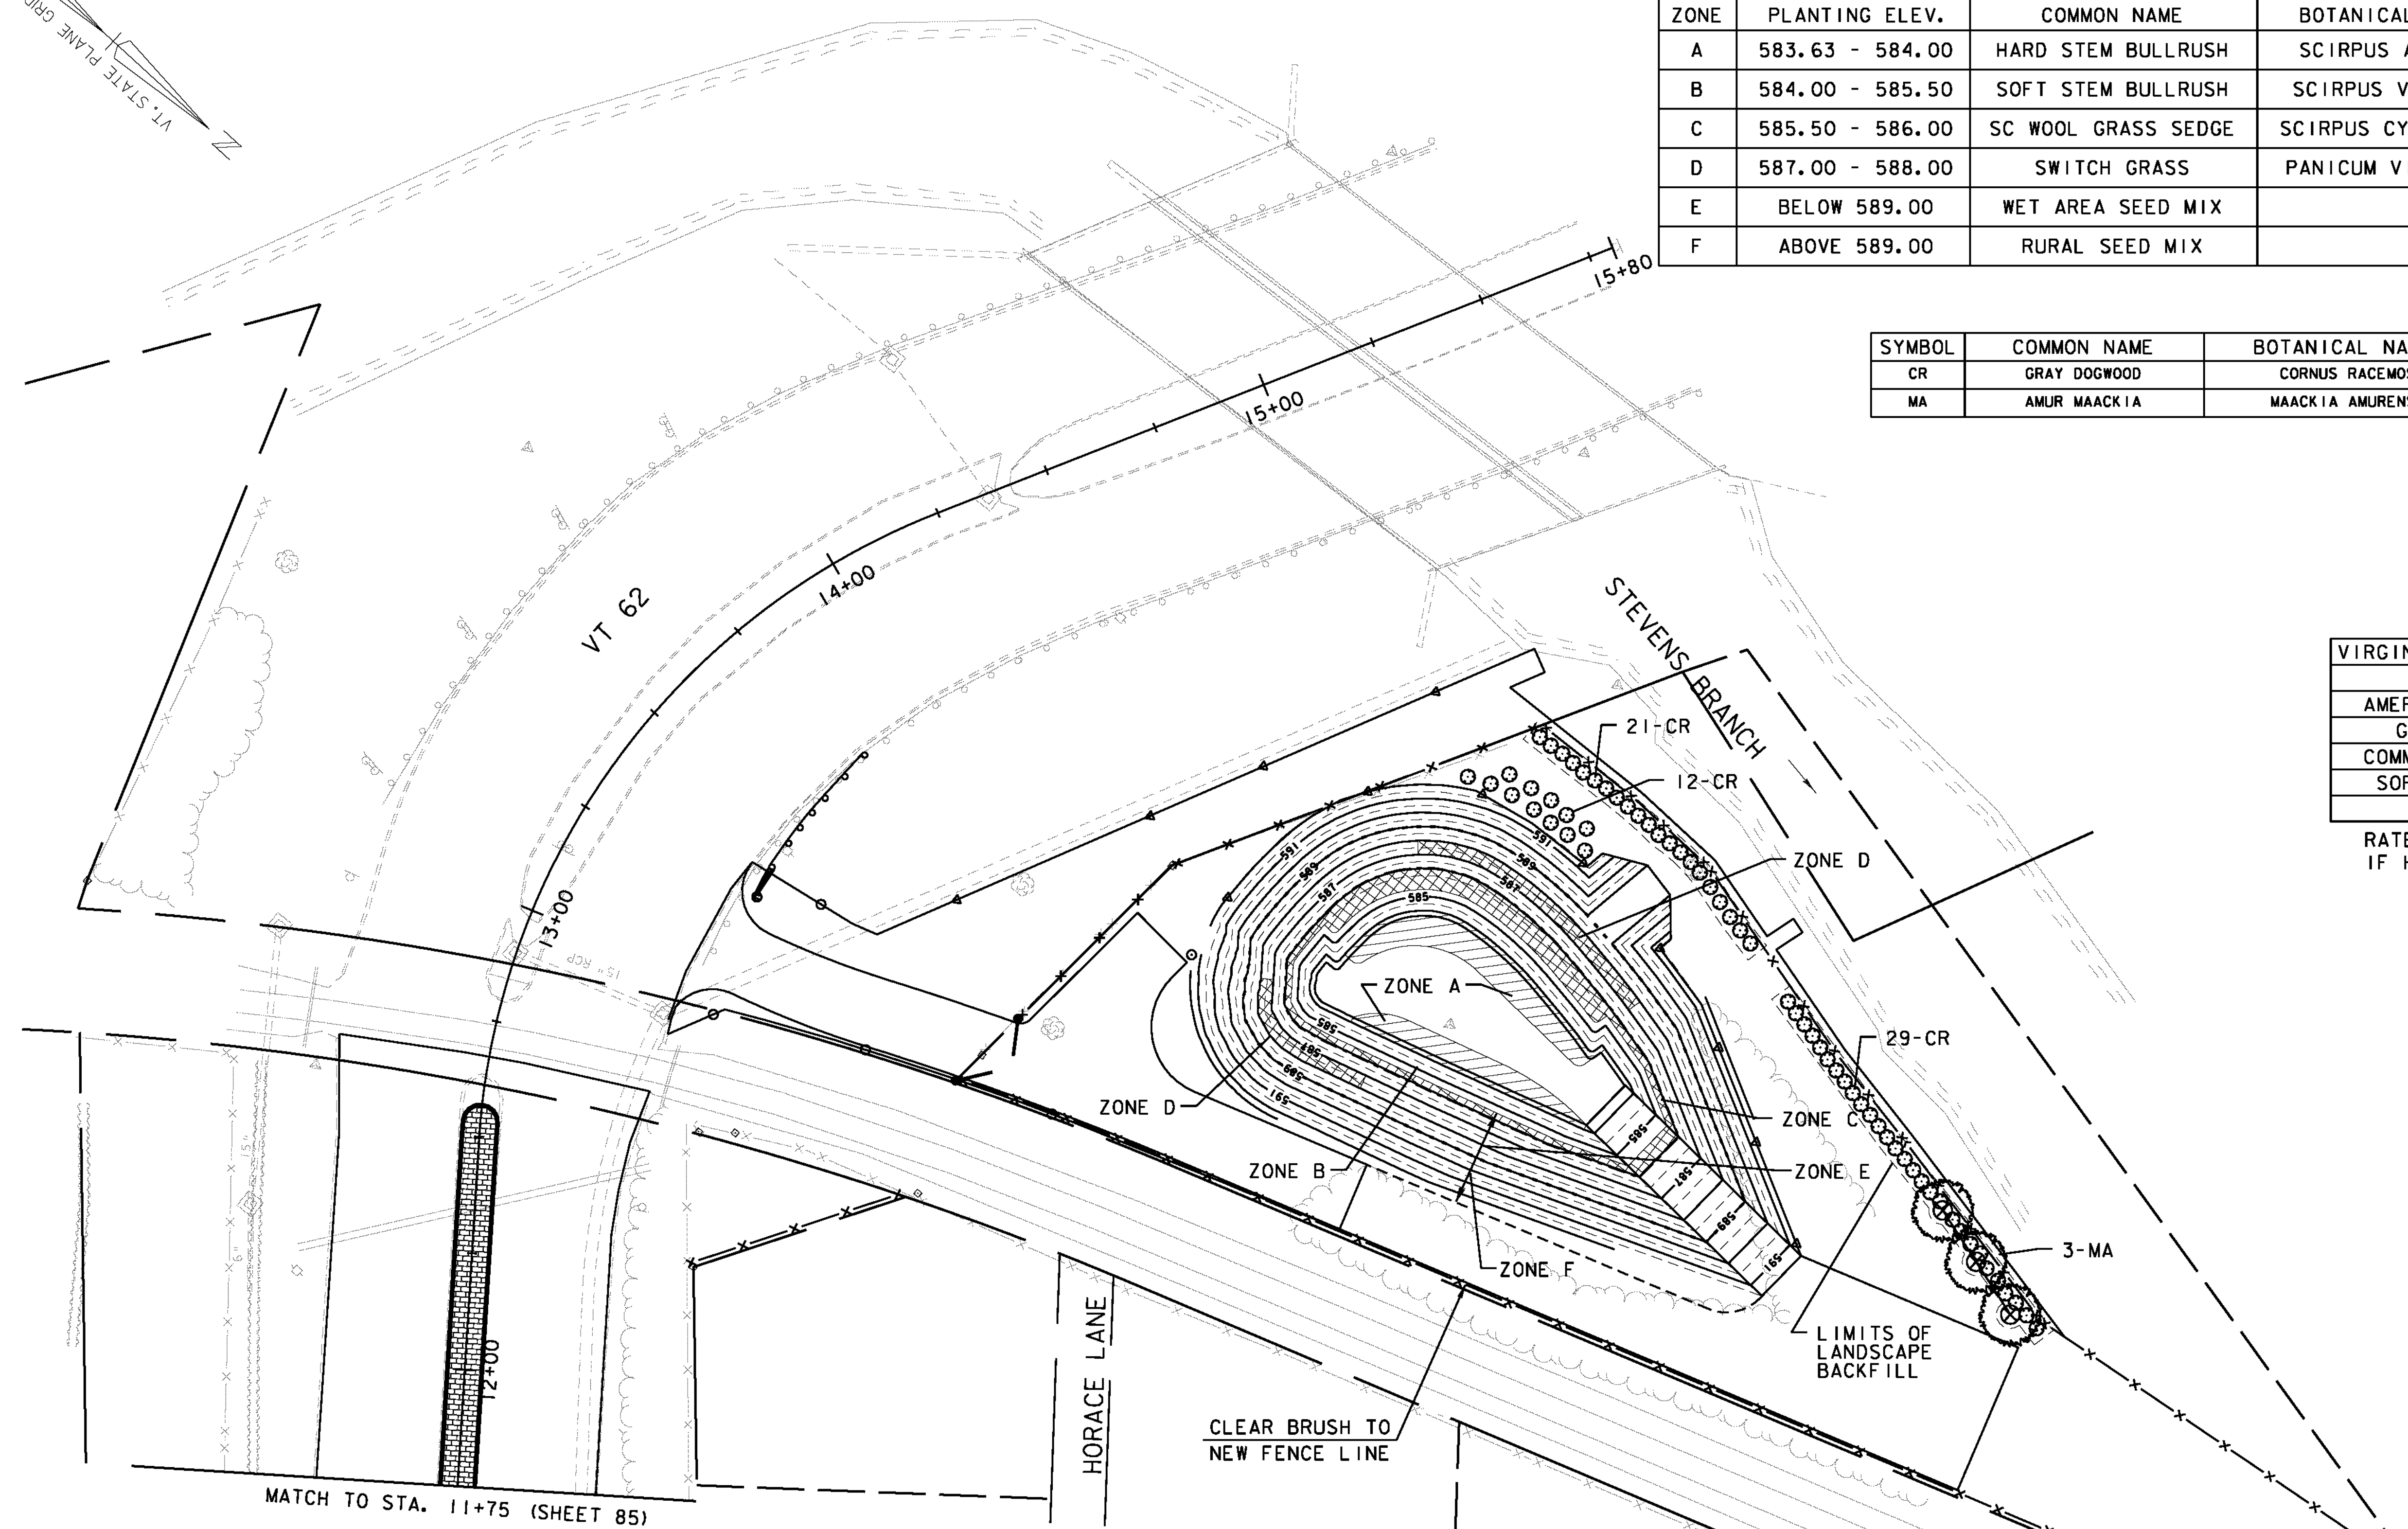


DECIDUOUS TREES
 SL STA 15+71 RT
 SL STA 15+73 RT
 SL STA 15+80 RT

DECIDUOUS SHRUBS
 SL STA 15+09 - 15+30 RT
 SL STA 15+27 - 15+53 RT
 SL STA 15+56 - 15+80 RT

LANDSCAPE BACKFILL, TRUCK MEASUREMENT
 SL STA 15+23 - 15+80 RT

NOTES:

- ALL MUNICIPAL GRANITE BENCHES SHALL BE REMOVED AND RESET BY THE CITY.
- ALL TREE PROTECTION ZONES SHALL BE PAID AS A LUMP SUM UNDER ITEM 656.85 - TREE PROTECTION.
- ALL TREES AND NAMED CULTIVARS HAVE BEEN CHECKED AND ALL PATENTS HAVE EXPIRED.

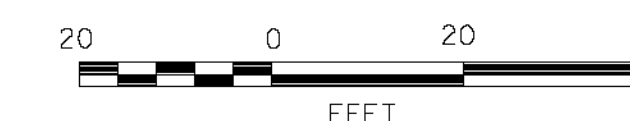

VHB Vanasse Hangen Brustlin, Inc.

PROJECT NAME: BARRE CITY
 PROJECT NUMBER: FECC F 026-1(34) C/2

FILE NAME: z85b010bdr_id_c2
 PROJECT LEADER: G. BAKOS
 DESIGNED BY: D. PECK
 LANDSCAPING PLAN #6

PLOT DATE: 3/9/2011
 DRAWN BY: D. PECK
 CHECKED BY:
 SHEET 90 OF 339

LEGEND:

- PROPOSED DECIDUOUS TREE (OUTSIDE OF SIDEWALK)
- PROPOSED DECIDUOUS TREE WITH 4' x 5' TREE PIT
- TREE PROTECTION ZONE / TPZ
- PROPOSED SHRUB
- EXISTING MEDIUM OR LARGE TREE OR STUMP TO BE REMOVED